## THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


^							Â				Ĥ			
B			CURRENT RATING (AMPS)	STUD SIZE IN	DIMENSIONS - IN [MM] +/02 [.5]									
	PART NUMBER				А	D DIA	w	G	С	Т	F	н	М	HEX KEY*
	CB25-18-CY	#14 - #10	25	1/8	1.00 [25.4]	0.14 [3.6]	.31 [7.9]	.20 [5.1]	.28 [7.1]	.07 [1.8]	.26 [6.6]	0.36 [9.1]	0.28 [7.1]	SLOTTED SCREW
^	CB35-36-CY	#14 - #6 (2) #10 AWG (2) #12 AWG (2) #14 AWG (1) #10 AWG WITH (1) #12 AWG (1) #12 AWG WITH (1) #14 AWG	50	3/16	1.24 [31.5]	0.19 [4.8]	.38 [9.7]	.22 [5.6]	.30 [7.6]	.07 [1.8]	.43 [10.9]	0.49 [12.4]	0.43 [10.9]	SLOTTED SCREW
	CBA70-14SL-CY	#14 - #4	70	1/4	1.31 [33.3]	0.26 [6.6]	.50 [12.7]	.25 [6.4]	.48 [12.2]	.08 [2.0]	.40 [10.1]	0.64 [16.3]	0.50 [12.7]	SLOTTED SCREW
	CB70-14-CY	#8-2 (1) #8 AWG WITH (1) #4 AWG (1) #8 AWG WITH (1) #6 AWG	90	1/4	1.55 [39.4]	0.26 [6.6]	.47 [11.9]	.25 [6.4]	.47 [11.9]	.08 [2.0]	.52 [13.2]	0.64 [16.3]	0.50 [12.7]	SLOTTED SCREW
^	CB125-14-QY	#6 - 1/0	125	1/4	1.98 [50.3]	0.26 [6.6]	.62 [15.7]	.42 [10.7]	.50 [12.7]	.11 [2.7]	.74 [18.7]	0.88 [22.4]	0.60 [15.2]	SLOTTED SCREW
/F\	CB175-38-QY	#4 - 3/0	175	3/8	2.20 [55.9]	0.39 [9.9]	.75 [19.0]	.43 [10.9]	.63 [16.0]	.16 [4.0]	.78 [19.8]	1.01 [25.7]	0.72 [18.3]	3/16
	CB225-56-QY	#2 - 4/0	225	5/16	2.55 [64.8]	0.33 [8.4]	.99 [25.1]	.51 [13.0]	.70 [17.8]	.12 [3.1]	1.02 [25.8]	1.13 [28.7]	0.94 [23.9]	3/16
	CB300-38-QY	1/0 - 350	300	3/8	2.83 [71.9]	0.39 [9.9]	.99 [25.1]	.51 [13.0]	.70 [17.8]	.12 [3.1]	1.03 [26.2]	1.39 [35.3]	1.23 [31.2]	5/16

0.39 [9.9] 1.50 [38.0] .90 [22.9] 1.15 [29.2] .18 [4.5] 1.39 [35.3] 1.61 [40.9]

0.59 [15.0] | 2.00 [50.8] | 1.12 [28.4] | 1.07 [27.2] | .25 [6.4] | 1.97 [50.0] | 2.32 [58.9]

4.09 [103.9]

4.84 [122.9]



3/8

1/2

400


650


CB400-38-3Y

CB650-12-3Y

1/0 - 500

600 - 1000

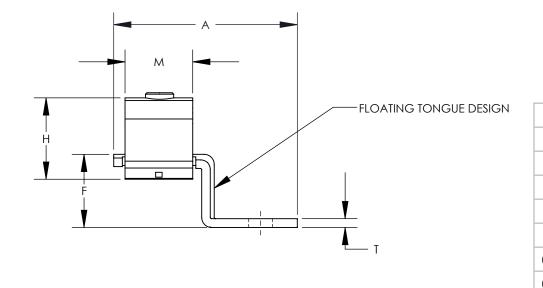

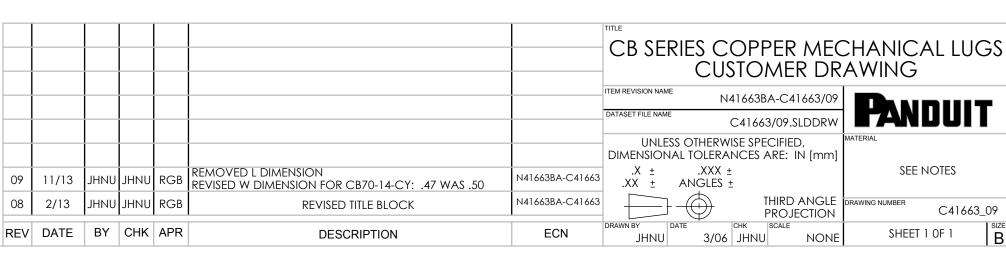

1.41 [35.8]

5/16



- 1. MATERIAL: BODY - COPPER SCREW - STEEL, ZINC PLATED
- 2. CULUS LISTEDFOR USE UP TO 600V & TEMPERATURE RATED 90°C
- 3. RATED FOR USE WITH COPPER STRANDED CODE CONDUCTOR ONLY
- 4. THESE PARTS ARE ROHS COMPLIANT
- 5. SEE PACKAGING LABEL FOR TIGHTENING TORQUE INFORMATION
- 6. PKG QTY: C = 100

Q = 253 = 3



SEE NOTES

SHEET 1 OF 1

C41663\_09

В

<sup>\*</sup> HEX STYLE & SIZE MAY DIFFER FROM CHART. DIFFERENCE IN SIZE WILL NOT AFFECT FIT, FORM, OR FUNCTION OF PART