


# HIGH END PERFORMANCE

## conga-TS87

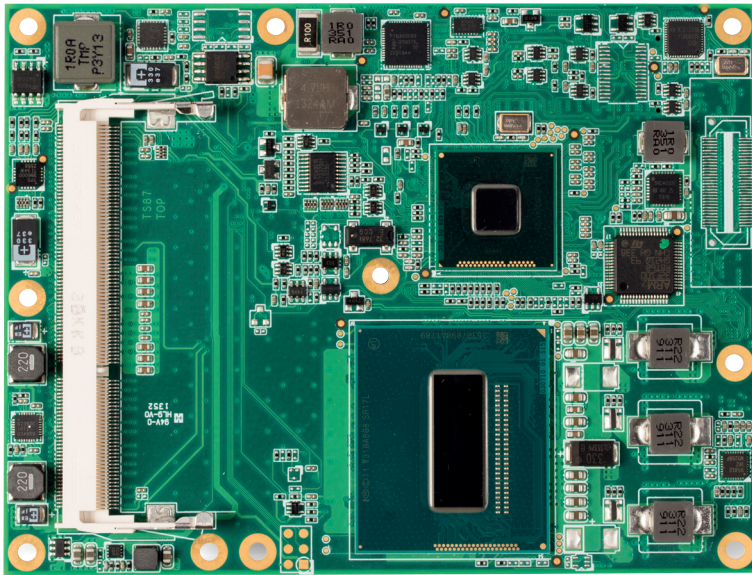


- 4<sup>th</sup> Gen. Intel® Core™ i7 quad core processor
- 3x DisplayPort 1.2, up to 4k resolution
- COM Express Basic Type 6 module
- Intel® AES-NI for hardware accelerated encryption and decryption

**COM**  **Express®**

| Formfactor                | Formfactor COM Express™ Basic   (95 x 125 mm)   Type 6 Connector Layout                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |  |  |  |  |  |  |  |  |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| CPU                       | <div>Intel® Core™ i7-4700EQ   Quad Core   2.4 GHz   Turbo Boost 3.4 GHz   6M Cache   TDP 47W   AVX2   AES-NI   AMT 9.0   TXT</div> <div>Intel® Core™ i5-4400E   Dual Core   2.7 GHz   Turbo Boost 3.3 GHz   3M Cache   TDP 37W   AVX2   AES-NI   AMT 9.0   TXT</div> <div>Intel® Core™ i5-4402E   Dual Core   1.6 GHz   Turbo Boost 2.7 GHz   3M Cache   TDP 25W   AVX2   AES-NI   AMT 9.0   TXT</div> <div>Intel® Core™ i3-4100E   Dual Core   2.4 GHz   3M Cache   TDP 37W   AES-NI</div> <div>Intel® Core™ i3-4102E   Dual Core   1.6 GHz   3M Cache   TDP 25W   AES-NI</div> <div>Intel® Celeron™ 2000E   Dual Core   2.2 GHz   2MB L3 cache   TDP 37W</div> <div>Intel® Celeron™ 2002E   Dual Core   1.56 GHz   2MB L3 cache   TDP 25W</div> <div>Intel® Turbo Boost Technology   Intel® Hyper-Threading Technology (Intel® HT Technology)   Intel® Advanced Vector Extensions 2.0 (Intel® AVX2)   Intel® Advanced Encryption Standard New Instructions (Intel® AES-NI)   Integrated dual channel memory controller   up to 25.6 GByte/sec. memory bandwidth   Intel® HD graphics with dynamic frequency up to 1GHz   Intel® Clear Video HD Technology   Intel® Virtualization Technology (Intel® VT)   Intel® Trusted Execution Technology (Intel® TXT)   Intel® Streaming SIMD Extensions 4.2 (Intel® SSE4.2)   PCLMULQDQ Instruction   Intel® Secure Key   Intel® Transactional Synchronization Extensions (Intel® TSX)</div> |  |  |  |  |  |  |  |  |  |
| DRAM                      | 2 Sockets   SO-DIMM DDR3L@1.35V up to 1600MT/s and 16GByte                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |
| Chipset                   | Mobile Intel® 8 Series Chipset: Intel® QM87 for Intel® Core™ processors / HM86 @ planned Celeron variants                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |  |  |  |  |  |  |  |  |
| Ethernet                  | Intel® I218-LM GbE LAN Controller with AMT 9.0 support                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |  |  |  |  |  |  |  |  |
| I/O Interfaces            | 7x PCI Express™ GEN. 2.0 lanes   1x PEG GEN 3.0 (8GT/s)   4x Serial ATA® 6 Gb/s   RAID 0/1/5/10 support   2x ExpressCard®   4x USB 3.0 (XHCI) 8x USB 2.0 (EHCI)   LPC bus   I²C bus (fast mode, 400 kHz, multi-master)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |  |  |  |  |  |  |  |  |
| Sound                     | Digital High Definition Audio Interface with support for multiple audio codecs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |  |  |  |  |  |  |  |
| Graphics                  | Next Generation Intel® HD Graphics with OpenCL 1.2   OpenGL 4.0 and DirectX11.1 support; up to three independent displays: HDMI 1.4, DVI, DP, VGA; High performance hardware MPEG-2 decoding   WMV9 (VC-1) and H.264 (AVC) support Blu-ray support @ 40 MBit/s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |  |  |  |  |  |  |  |
| LVDS (eDP optional)       | Dual channel LVDS transmitter   Supports flat panels 2x24 Bit interface   VESA mappings   resolutions up to 1920x1200   Automatic Panel Detection via EDID/EPI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |  |  |  |  |  |  |  |
| Digital Display Interface | 3x DS (DVI   HDMI) / DisplayPort 1.2a with daisy chaining   resolutions up to 4k                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |  |  |  |  |  |  |  |  |
| CRT Interface             | 350 MHz RAMDAC   resolutions up to QXGA (2048x1536 @75Hz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |  |  |  |  |  |  |  |  |
| congatec Board Controller | Multi Stage Watchdog   non-volatile User Data Storage   Manufacturing and Board Information   Board Statistics   BIOS Setup Data Backup I²C bus (fast mode, 400 kHz, multi-master)   Power Loss Control                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |  |  |  |  |  |  |  |  |
| Embedded BIOS Features    | AMI Aptio® UEFI 2.x firmware   8 MByte serial SPI firmware flash                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |  |  |  |  |  |  |  |  |
| Security                  | The conga-TS87 can be optionally equipped with a discrete “Trusted Platform Module” (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e-commerce will benefit also with improved authentication, integrity and confidence levels.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |  |  |  |  |  |  |  |  |
| Power Management          | ACPI 4.0 with battery support                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |  |  |  |  |  |  |  |  |
| Operating Systems         | Microsoft® Windows 8   Microsoft® Windows 7   Linux   Microsoft® Windows® embedded Standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |  |  |  |  |  |  |  |  |
| Power Consumption         | Typ. application: tbd.   see manual for full details   CMOS Battery Backup                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |  |  |
| Temperature               | Operating: 0 .. +60°C   Storage: -20 .. +80°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |  |  |  |  |  |  |  |  |
| Humidity                  | Operating: 10 - 90% r. H. non cond.   Storage: 5 - 95% r. H. non cond.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |  |  |  |  |  |  |  |  |
| Size                      | 95 x 125 mm (3.74” x 4.92”)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |  |  |  |  |  |  |  |  |

# conga-TS87 | Block diagram

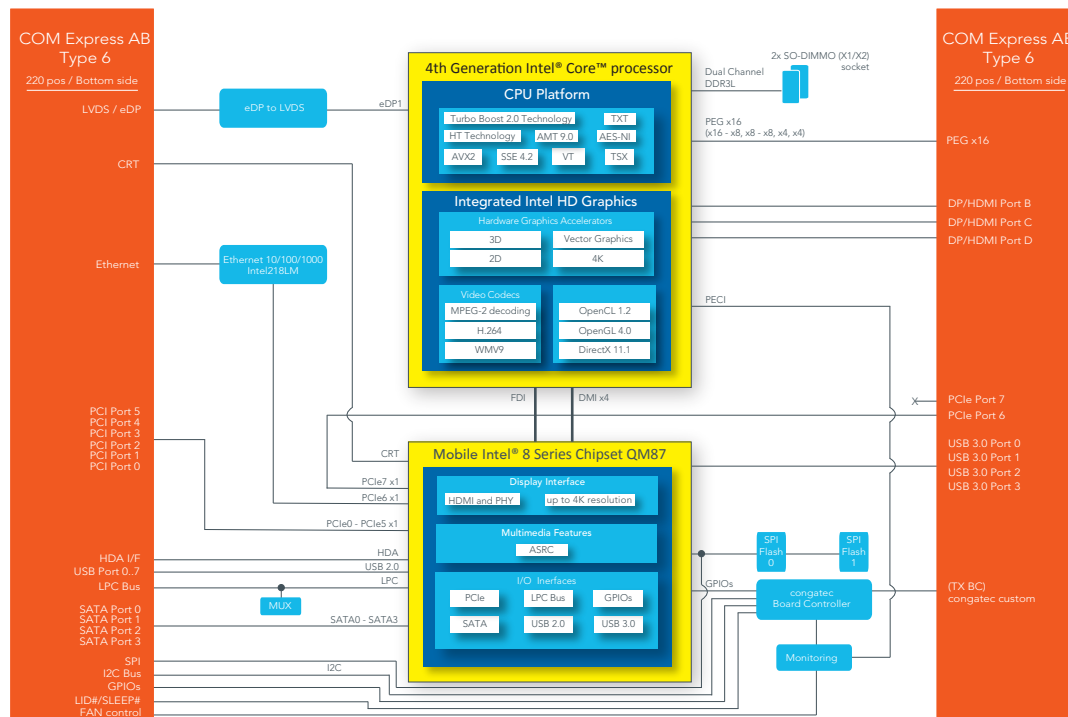

# conga-TS87 | Order Information

| Article                            | PN     | Description                                                                                                                                                                                                         |
|------------------------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| conga-TS87/i7-4700EQ               | 046804 | Intel® Core™ i7-4700EQ quad core processor with 2.4GHz   6MB L2 cache and 1600MT/s dual channel DDR3L memory interface                                                                                              |
| conga-TS87/i5-4402E                | 046805 | Intel® Core™ i5-4402E dual core processor with 1.6GHz   3MB L2 cache and 1600MT/s dual channel DDR3L memory interface                                                                                               |
| conga-TS87/i5-4400E                | 046806 | Intel® Core™ i5-4400E dual core processor with 2.7GHz   3MB L2 cache and 1600MT/s dual channel DDR3L memory interface                                                                                               |
| conga-TS87/i3-4102E                | 046807 | Intel® Core™ i3-4102E dual core processor with 1.6GHz   3MB L2 cache and 1600MT/s dual channel DDR3L memory interface                                                                                               |
| conga-TS87/i3-4100E                | 046808 | Intel® Core™ i3-4100E dual core processor with 2.4GHz   3MB L2 cache and 1600MT/s dual channel DDR3L memory interface                                                                                               |
| conga-TS87/2000E                   | 046810 | Intel® Celeron™ 2000E dual core processor with 2.2GHz   2MB L3 cache and 1600MT/s dual channel DDR3L memory interface                                                                                               |
| conga-TS87/2002E                   | 046811 | Intel® Celeron™ 2002E dual core processor with 1.56GHz   2MB L3 cache and 1600MT/s dual channel DDR3L memory interface                                                                                              |
| conga-TS87/HSP-FP-B                | 046851 | Standard heatspreader for high performance COM Express module conga-TS87 with flat heat pipes. All standoffs are with 2.7mm bore hole                                                                               |
| conga- TS87/HSP-FP-T               | 046852 | Standard heatspreader for high performance COM Express module conga-TS87 with flat heat pipes. All standoffs are M2.5mm threaded                                                                                    |
| conga-TS87/CSA-FP-B                | 046853 | Standard active cooling solution for high performance COM Express module conga-TS87 with flat heat pipes   15mm fins   20mm overall heat sink height and integrated 12V fan. All standoffs are with 2.7mm bore hole |
| conga-TS87/CSA-FP-T                | 046854 | Standard active cooling solution for high performance COM Express module conga-TS87 with flat heat pipes   15mm fins   20mm overall heat sink height and integrated 12V fan. All standoffs are M2.5mm threaded      |
| conga-TS87/CSP-FP-B                | 046855 | Standard passive cooling solution for high performance COM Express module conga-TS87 with flat heat pipes   15mm fins and 20mm overall heat sink height. All standoffs are with 2.7 mm bore hole                    |
| conga-TS87/CSP-FP-T                | 046856 | Standard passive cooling solution for high performance COM Express module conga-TS87 with flat heat pipes   15mm fins and 20mm overall heat sink height. All standoffs are M2.5mm threaded                          |
| DDR3L-SODIMM-1600 (2GB)            | 068755 | DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 2GB RAM                                                                                                                                                 |
| DDR3L-SODIMM-1600 (4GB)            | 068756 | DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 4GB RAM                                                                                                                                                 |
| DDR3L-SODIMM-1600 (8GB)            | 068757 | DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 8GB RAM                                                                                                                                                 |
| <b>Accessories</b>                 |        |                                                                                                                                                                                                                     |
| conga-TEVAL                        | 065800 | Evaluation carrier board for Type 6 COM-Express-modules                                                                                                                                                             |
| conga-LDVI/EPI                     | 011115 | LVDS to DVI converter board for digital flat panels with onboard EEPROM                                                                                                                                             |
| COM-Express-carrier-board-Socket-5 | 400007 | Connector for COM-Express carrier boards   height 5mm   packing unit 4 pieces                                                                                                                                       |
| COM-Express-carrier-board-Socket-8 | 400004 | Connector for COM-Express carrier boards   height 8mm   packing unit 4 pieces                                                                                                                                       |

© 2015 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. December 2, 2015 KS