

DETAILS



| | |
|------------------------|-----------------|
| Product Number | C12599_LENINA-W |
| Family | Lenina |
| Type | Reflector |
| Color | metal |
| Diameter | 74 mm |
| Height | 40 mm |
| Style | round |
| Optic Material | PC |
| Holder Material | |
| Fastening | |
| Status | ready |
| ROHS Compliant | Yes |
| Date Updated | 11/06/2015 |




OPTICAL PROPERTIES

| LED | Viewing Angle | Light Beam | Effi- ciency | cd/lm | Connector |
|---------------|------------------|---------------|-----------------|------------|-------------------------------------|
| CXA/B 30xx | sim: 46 | Wide | sim: 89 % | sim: 1.300 | IDEAL: 50-2234C + Lena(50-2100LN) |
| Unknown | 54 deg | Wide | 87 % | 1.100 | IDEAL: 50-2204-CT + Lena(50-2100LN) |
| CLL04x/CLU044 | 54 deg | Wide | 87 % | 1.100 | IDEAL: 50-2204-CT + Lena(50-2100LN) |
| CLL04x/CLU044 | 57 deg | Wide | 82 % | 1.000 | A.A.G. STUCCHI: 8102/G2 + S-8000/12 |


| |
|--------------------------|
| This drawing applies to: |
| C12597_LENINA-S |
| C12598_LENINA-M |
| C12599_LENINA-W |
| C12958_LENINA-XW |

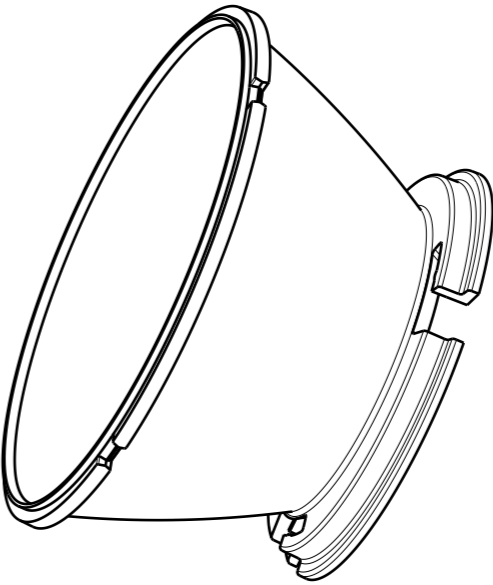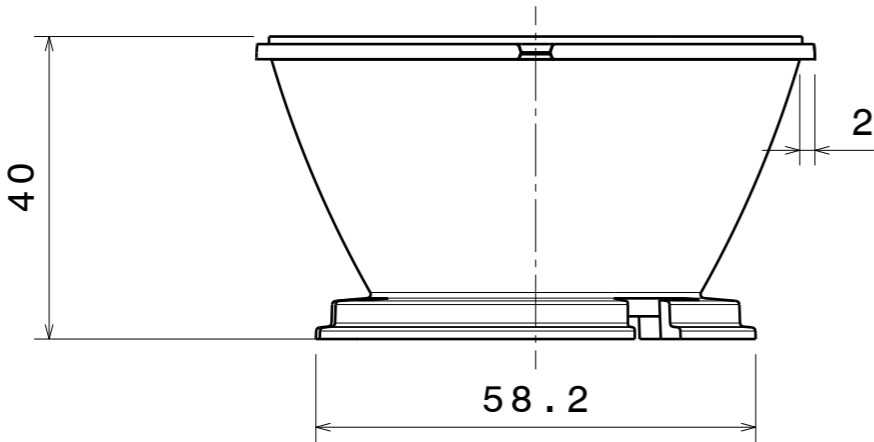


Isometric view

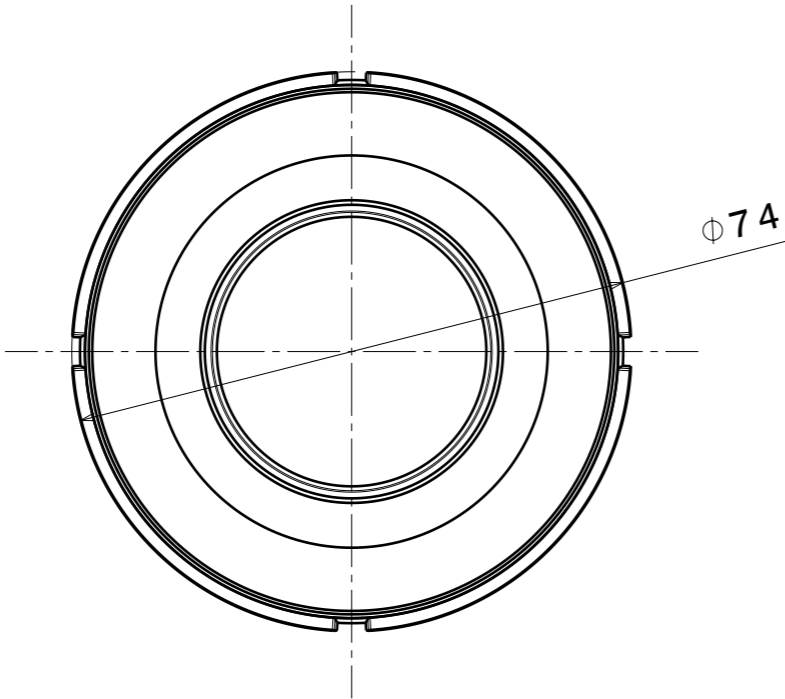


| INDEX | PART NO | DESCRIPTION |
|-------|------------------|-------------|
| 1 | Lenina-reflector | PC |


| | |
|---|--|
| Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L | |
| THIRD ANGLE PROJECTION:  | |
| This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy." | |

| | |
|---|------------------|
|  LediL Oy Salorankatu 10 FIN 24240 SALO Finland | |
| DRAWING TITLE LENINA_datasheet | |
| SIZE A3 | PART NUMBER - |
| SCALE 1:1 | WEIGHT - |
| SHEET 1/1 | |

Luminaire: LEDiL Oy C12599_LENINA-W_(CLL040)
Lamps: 1 x Citizen_CLL040_(CLL040-1218A-50KL1A1)_1158.48lm@250mA_P=8.26844W_I=249.9mA

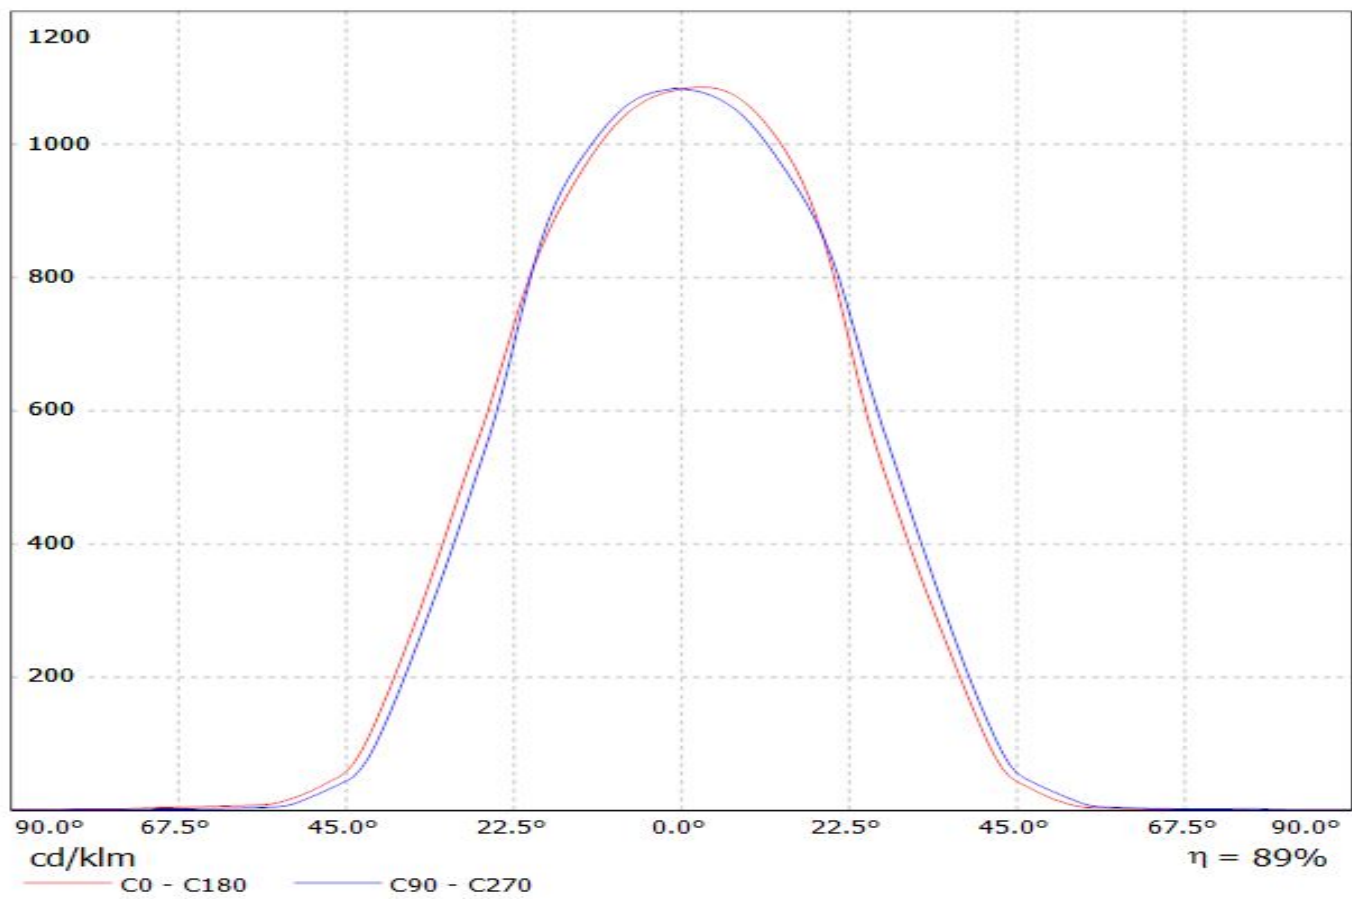


Luminaire: LEDiL Oy C12599_LENINA-W_(CLU044_+_8102-G2_+_S-8000-12)
Lamps: 1 x Citizen_CLU044_(1212B8-303M1A2)_546.982lm@100mA_P=3.2W_I=0.1A

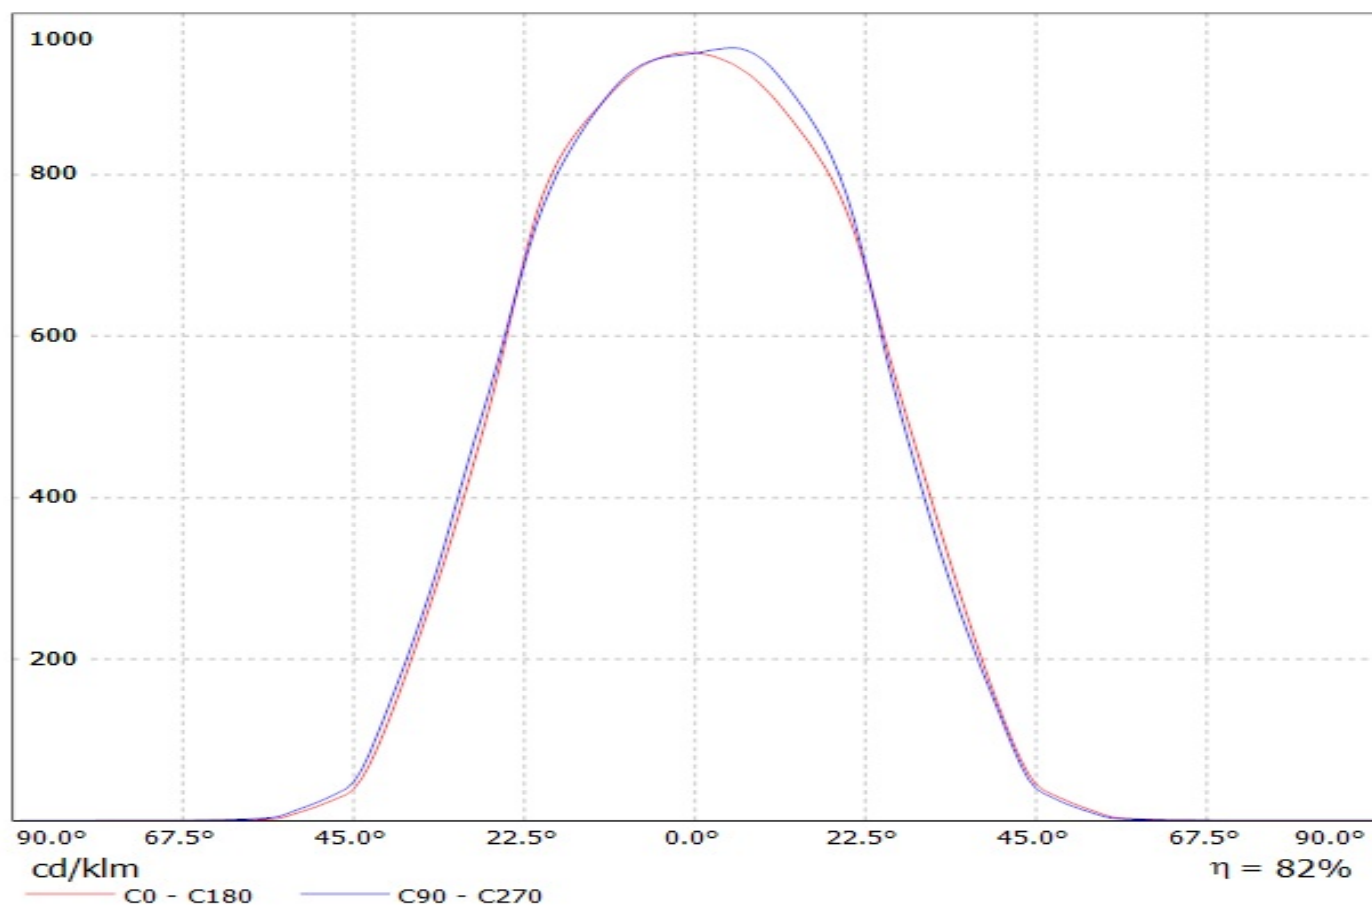

Luminaire: LEDiL Oy C12599_LENINA-W_(CLL040)

Lamps: 1 x Citizen_CLL040_(CLL040-1218A-50KL1A1)_1158.48lm@250mA_P=8.26844W_I=249.9mA

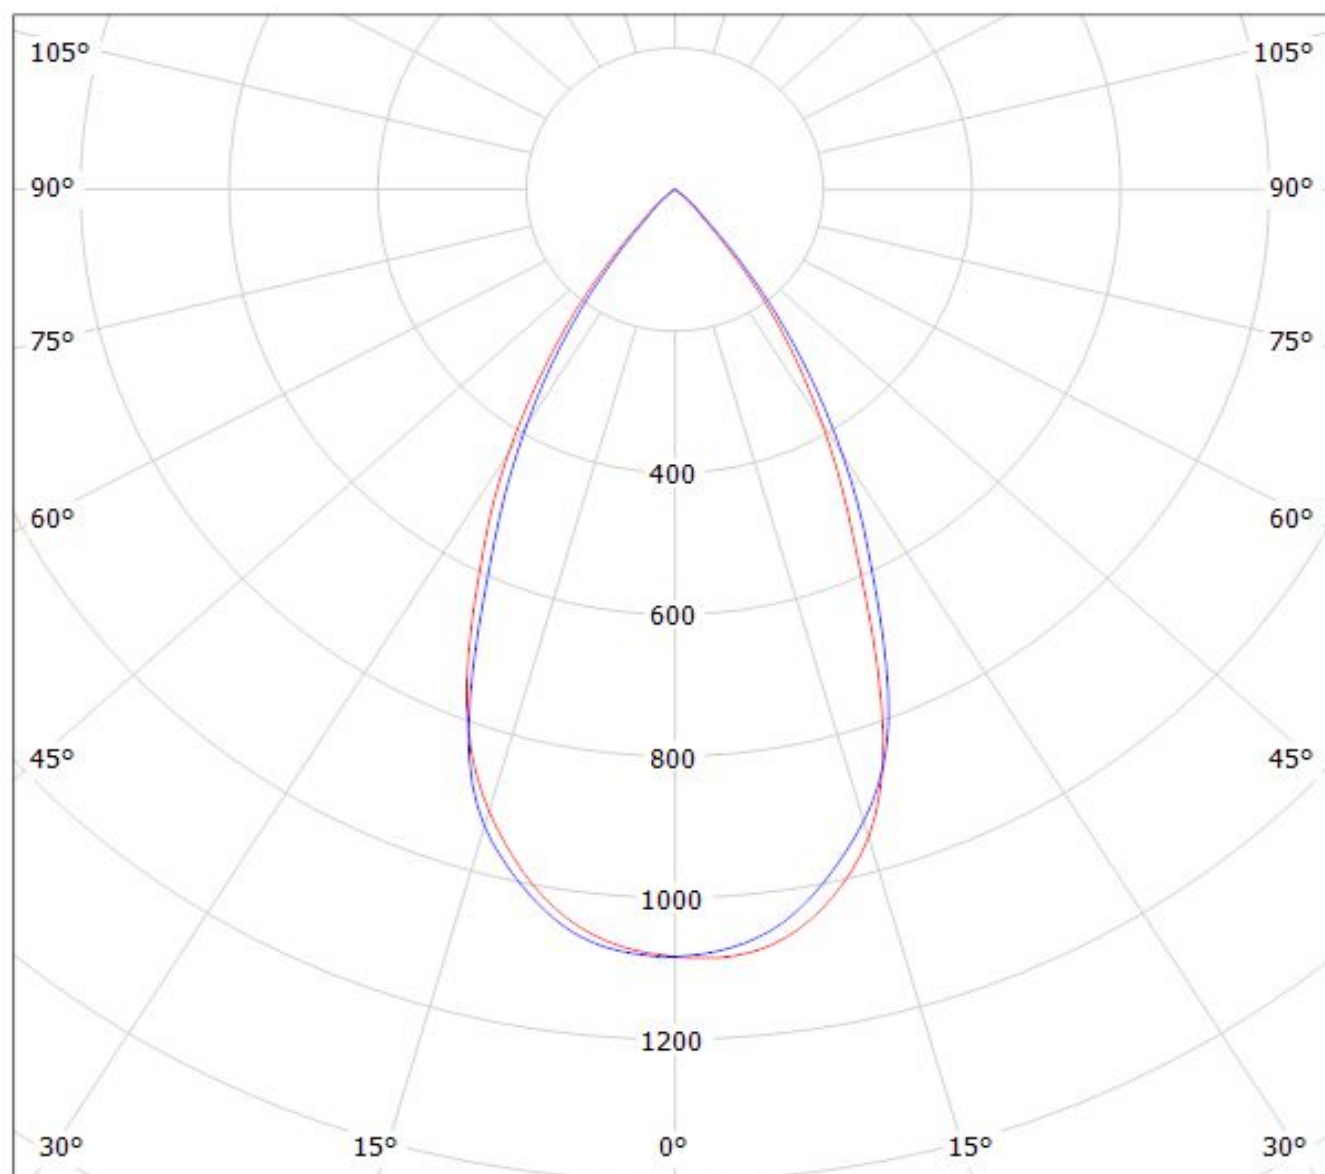

cd/klm


$\eta = 89\%$

C0 - C180

C90 - C270

Luminaire: LEDiL Oy C12599_LENINA-W_(CLU044+_8102-G2+_S-8000-12)

Lamps: 1 x Citizen_CLU044_(1212B8-303M1A2)_546.982lm@100mA_P=3.2W_I=0.1A

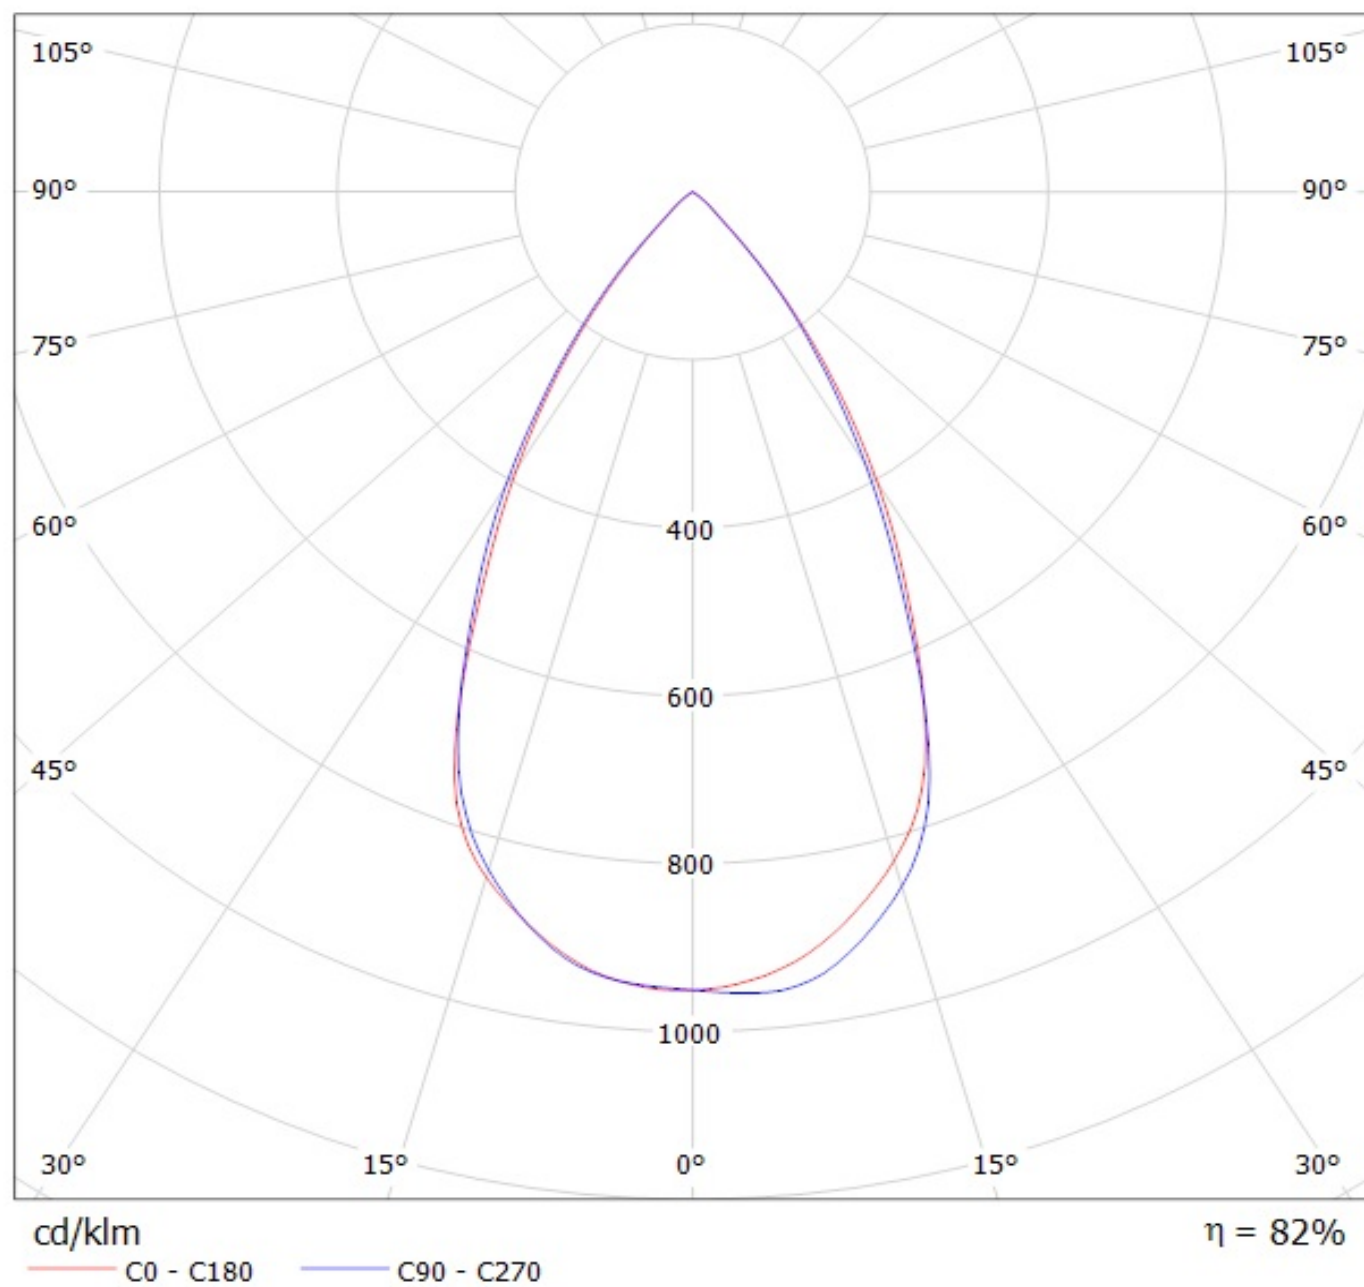

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.