

13AT97-T
PAGE 1 OF 1

M

DRAWING
NUMBER

8

9

ISSUE

8

9

REPLACES

RELEASE NO. SR 10228

CHECK

REVISIONS

A	C050771	J A P	19 JAN 82
B	C051042	C J H	9 MAR 82
C	C052725	S L	20 MAY 83
D	C066089	D A W	13 FEB 91
E	C092352	D L T	23 JUN 99

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

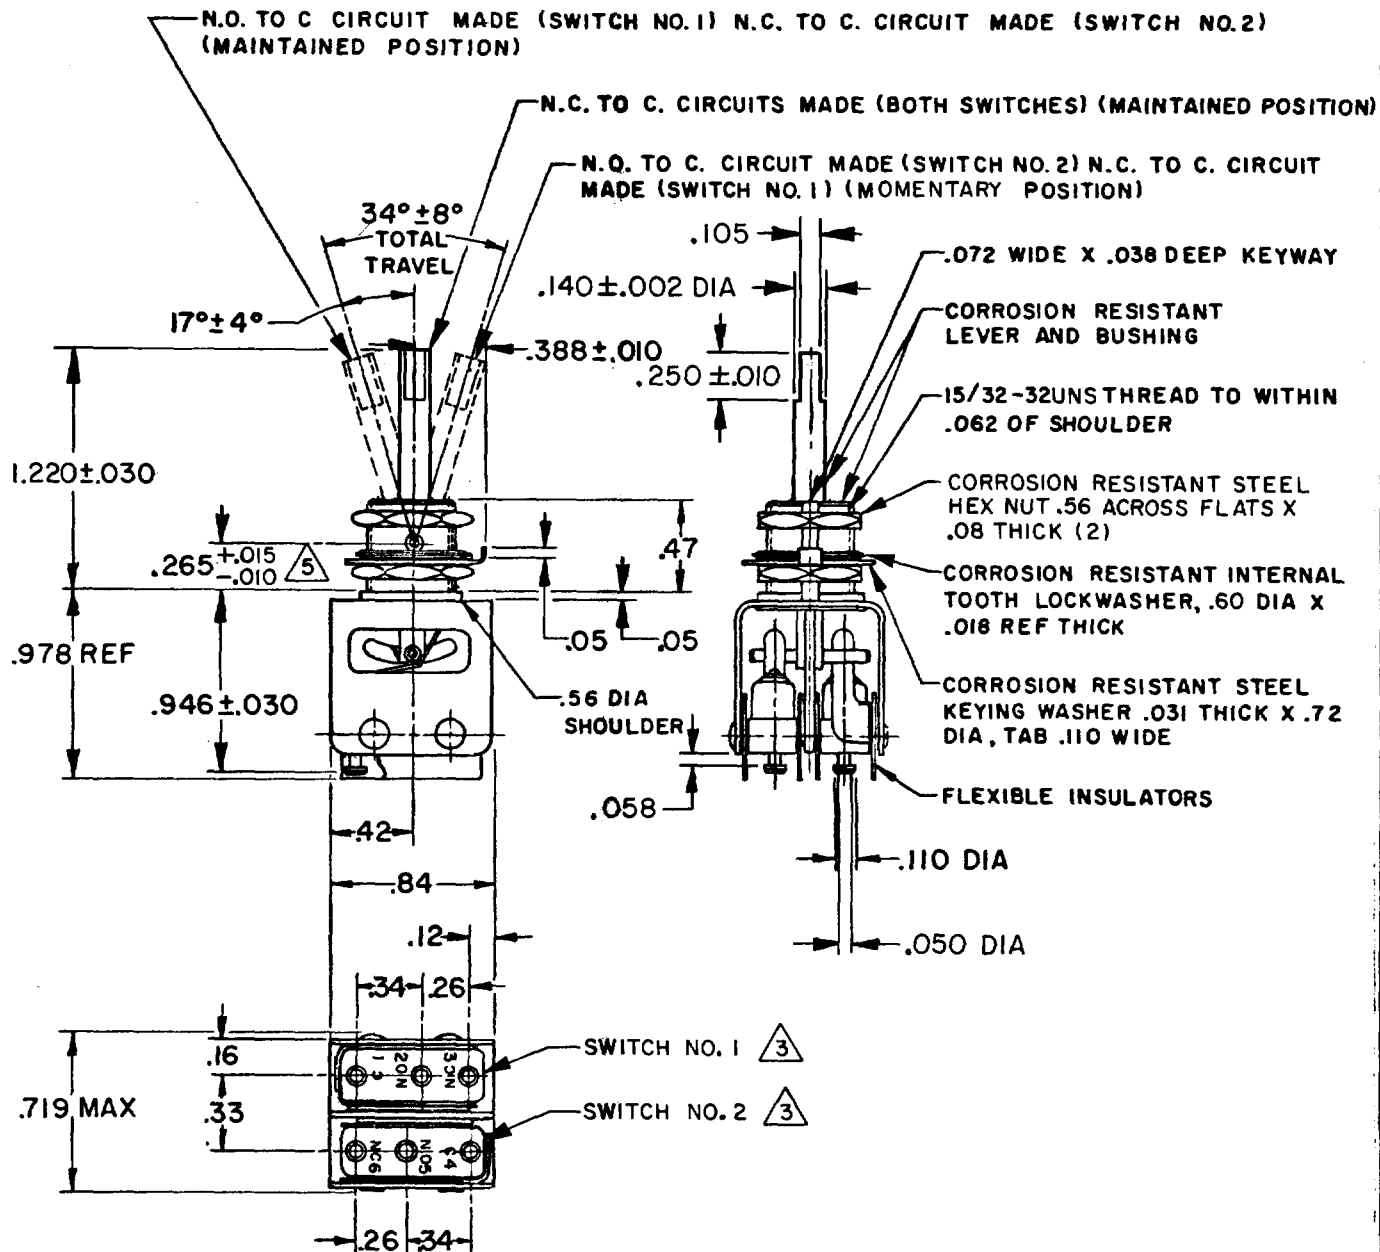

NOTES

- 1 - UNIT INCLUDES CATALOG LISTING "22SM267-T" TYPE BASIC SWITCH (2)
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - NUMERICAL TERMINAL DESIGNATION MARKED ADJACENT STANDARD DESIGNATION
- 4 - BASIC SWITCHES HAVE 24K GOLD OVERLAY CONTACTS
- 5 - DETERMINED BY BUSHING PIVOT HOLE CENTER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE	FULL																												
	CONTACT ARRANGEMENT S P D T (2)	DO NOT SCALE PRINT																													
	30 VOLTS DC RATING INDUCTIVE ---- SEA LEVEL -- 1/2 AMP 50,000 FT -- 1/2 AMP RESISTIVE ---- SEA LEVEL -- 1 AMP 50,000 FT -- 1 AMP MAXIMUM INRUSH ----- 2 AMP	TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2 <table> <tr> <th>DM.</th><th>TOL.</th><th>DM.</th><th>TOL.</th></tr> <tr> <th>in</th><th>mm/in</th><th>in</th><th>mm/in</th></tr> <tr> <td>NO PLACES</td><td>X</td><td>1/64</td><td>X</td></tr> <tr> <td>ONE PLACE</td><td>X, X</td><td>0.4/018</td><td>X, X</td></tr> <tr> <td>TWO PLACES</td><td>X, X, X</td><td>0.15/008</td><td>X, X, X</td></tr> <tr> <td>THREE PLACES</td><td>X, X, X, X</td><td></td><td></td></tr> <tr> <td>ANGLES</td><td></td><td></td><td></td></tr> </table> DESIGN UNITS ☐ IN METRIC ☐ US CUSTOMARY		DM.	TOL.	DM.	TOL.	in	mm/in	in	mm/in	NO PLACES	X	1/64	X	ONE PLACE	X, X	0.4/018	X, X	TWO PLACES	X, X, X	0.15/008	X, X, X	THREE PLACES	X, X, X, X			ANGLES			
DM.	TOL.	DM.	TOL.																												
in	mm/in	in	mm/in																												
NO PLACES	X	1/64	X																												
ONE PLACE	X, X	0.4/018	X, X																												
TWO PLACES	X, X, X	0.15/008	X, X, X																												
THREE PLACES	X, X, X, X																														
ANGLES																															
		WEIGHT	.06 LB																												

FORMTEK

FO-52848-A

DRAWN

J A P 19 JAN 82