


DRAWING MADE IN THIRD ANGLE PROJECTION		3		2		1	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		,19			
© COPYRIGHT 19		BY AMP INCORPORATED.		ALL INTERNATIONAL RIGHTS RESERVED.			
PART NO.	DIM A						
862550-1	6.00 [152.4]						
862550-2	8.00 [203.2]						
862550-3	10.00 [254.0]						
862550-4	12.00 [304.8]						
862550-5	15.00 [381.0]	OBSOLETE					
862550-6	18.00 [457.2]						
862550-7	21.00 [533.4]	OBSOLETE					
862550-8	24.00 [609.6]						
862550-9	36.00 [914.4]						
1-862550-0	30.00 [762.0]	OBSOLETE					
1-862550-1	110.00 [2794.0]						
1-862550-2	72.00 [1828.8]						
1-862550-3	48.00 [1219.2]						
1-862550-4	7.00 [177.8]						
1-862550-5	5.00 [127.0]	OBSOLETE					
1-862550-6	60.00 [1524.0]	OBSOLETE					

PROD	LOC	DIST	P	F	REVISIONS				
4086	DF	S0			ZONE	LTR	DESCRIPTION	DATE	APPD
CODE						K	REV & REDRAWN;0600-5719-96 CT	9-96	SG

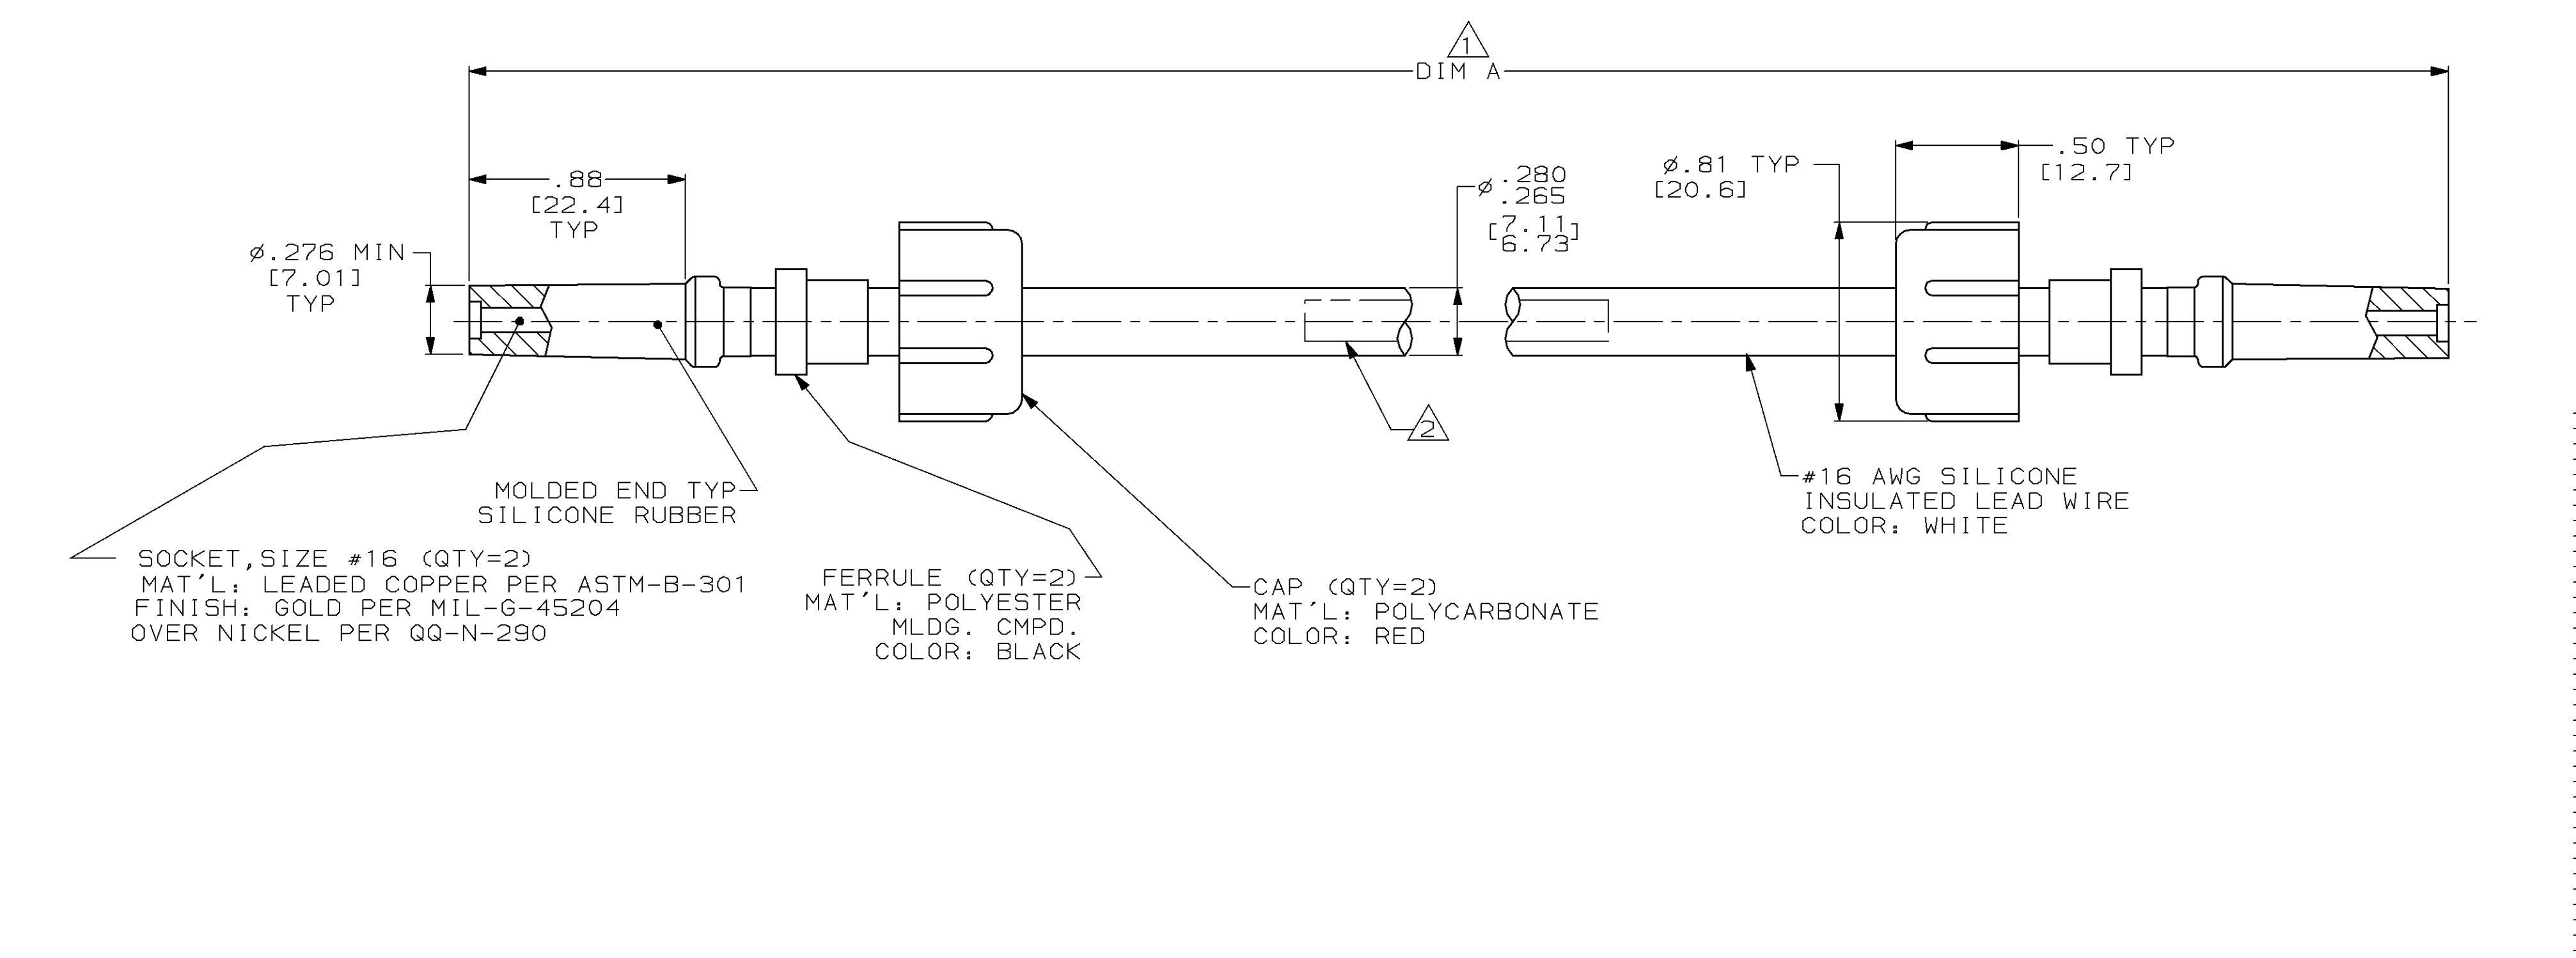

1

TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [±3.1]
24 INCHES [609.6] & UP = ±1%

2

MARKED PER MIL-STD-130 LOCATED APPROX IN CENTER OF LEAD.

3

TO MATE WITH AMP LGH-1
RECEPTACLE WITH .88 [22.4] BARREL DEPTH.

4

OPERATING VOLTAGE: 20 KVDC AT 0 TO 70,000
FEET; -55°C TO 125°C.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± - ANGLES ± -	DR 9-27-96 C.C.THOMAS	AMP AMP Incorporated Harrisburg, PA 17105-3608		
	CHK 10-30-96 S.GLATFELTER			
	APPD 10-30-96 S.GLATFELTER	NAME		
	MATERIAL SEE CALLOUTS	RLSE 10-30-96 C.THOMAS	LEAD ASS'Y,DBL. END,POS. STOP, LGH-1	
PRODUCT SPEC -				
FINISH SEE CALLOUTS	APPLICATION SPEC -	SIZE C	CAGE CODE 00779	DRAWING NO 862550
	WEIGHT -	SCALE 2:1		SHEET 1 OF 1