
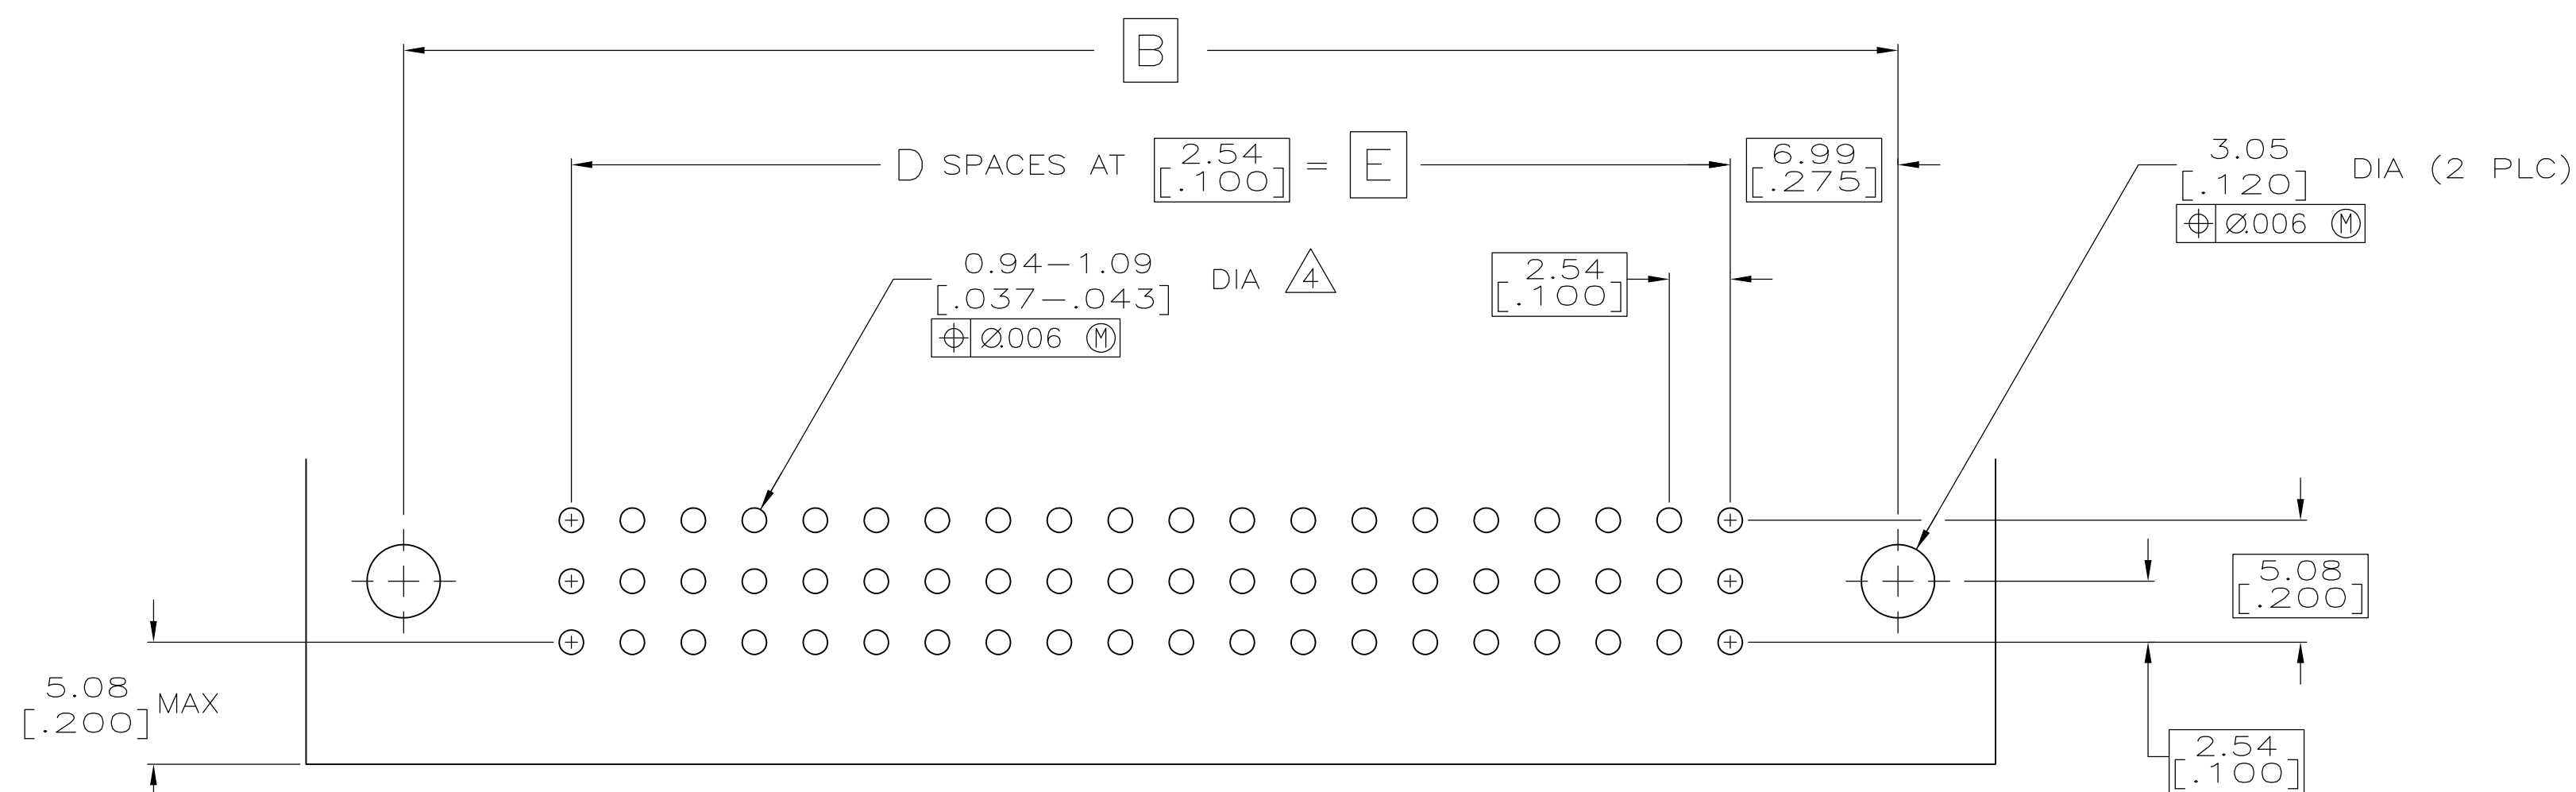
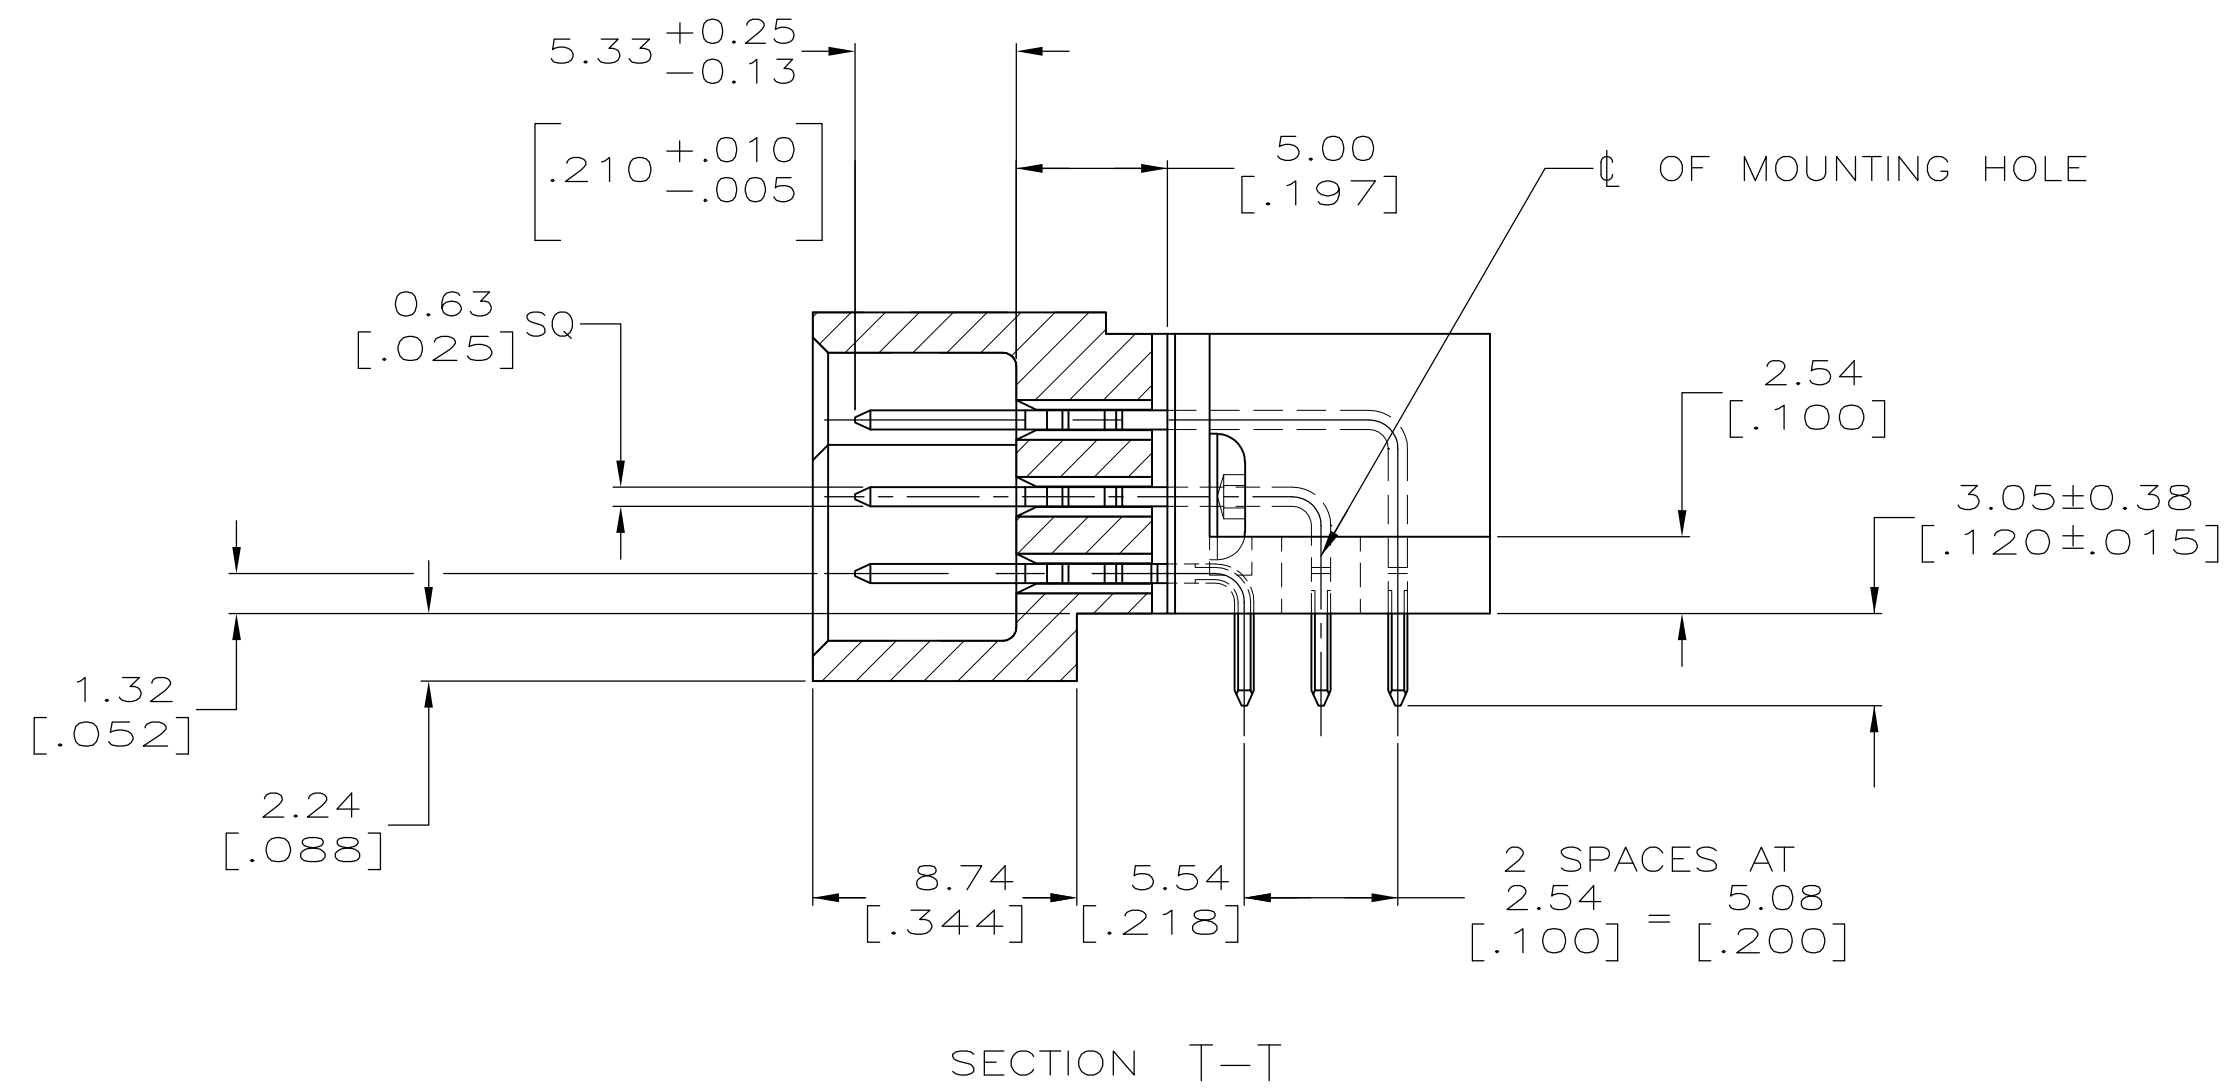
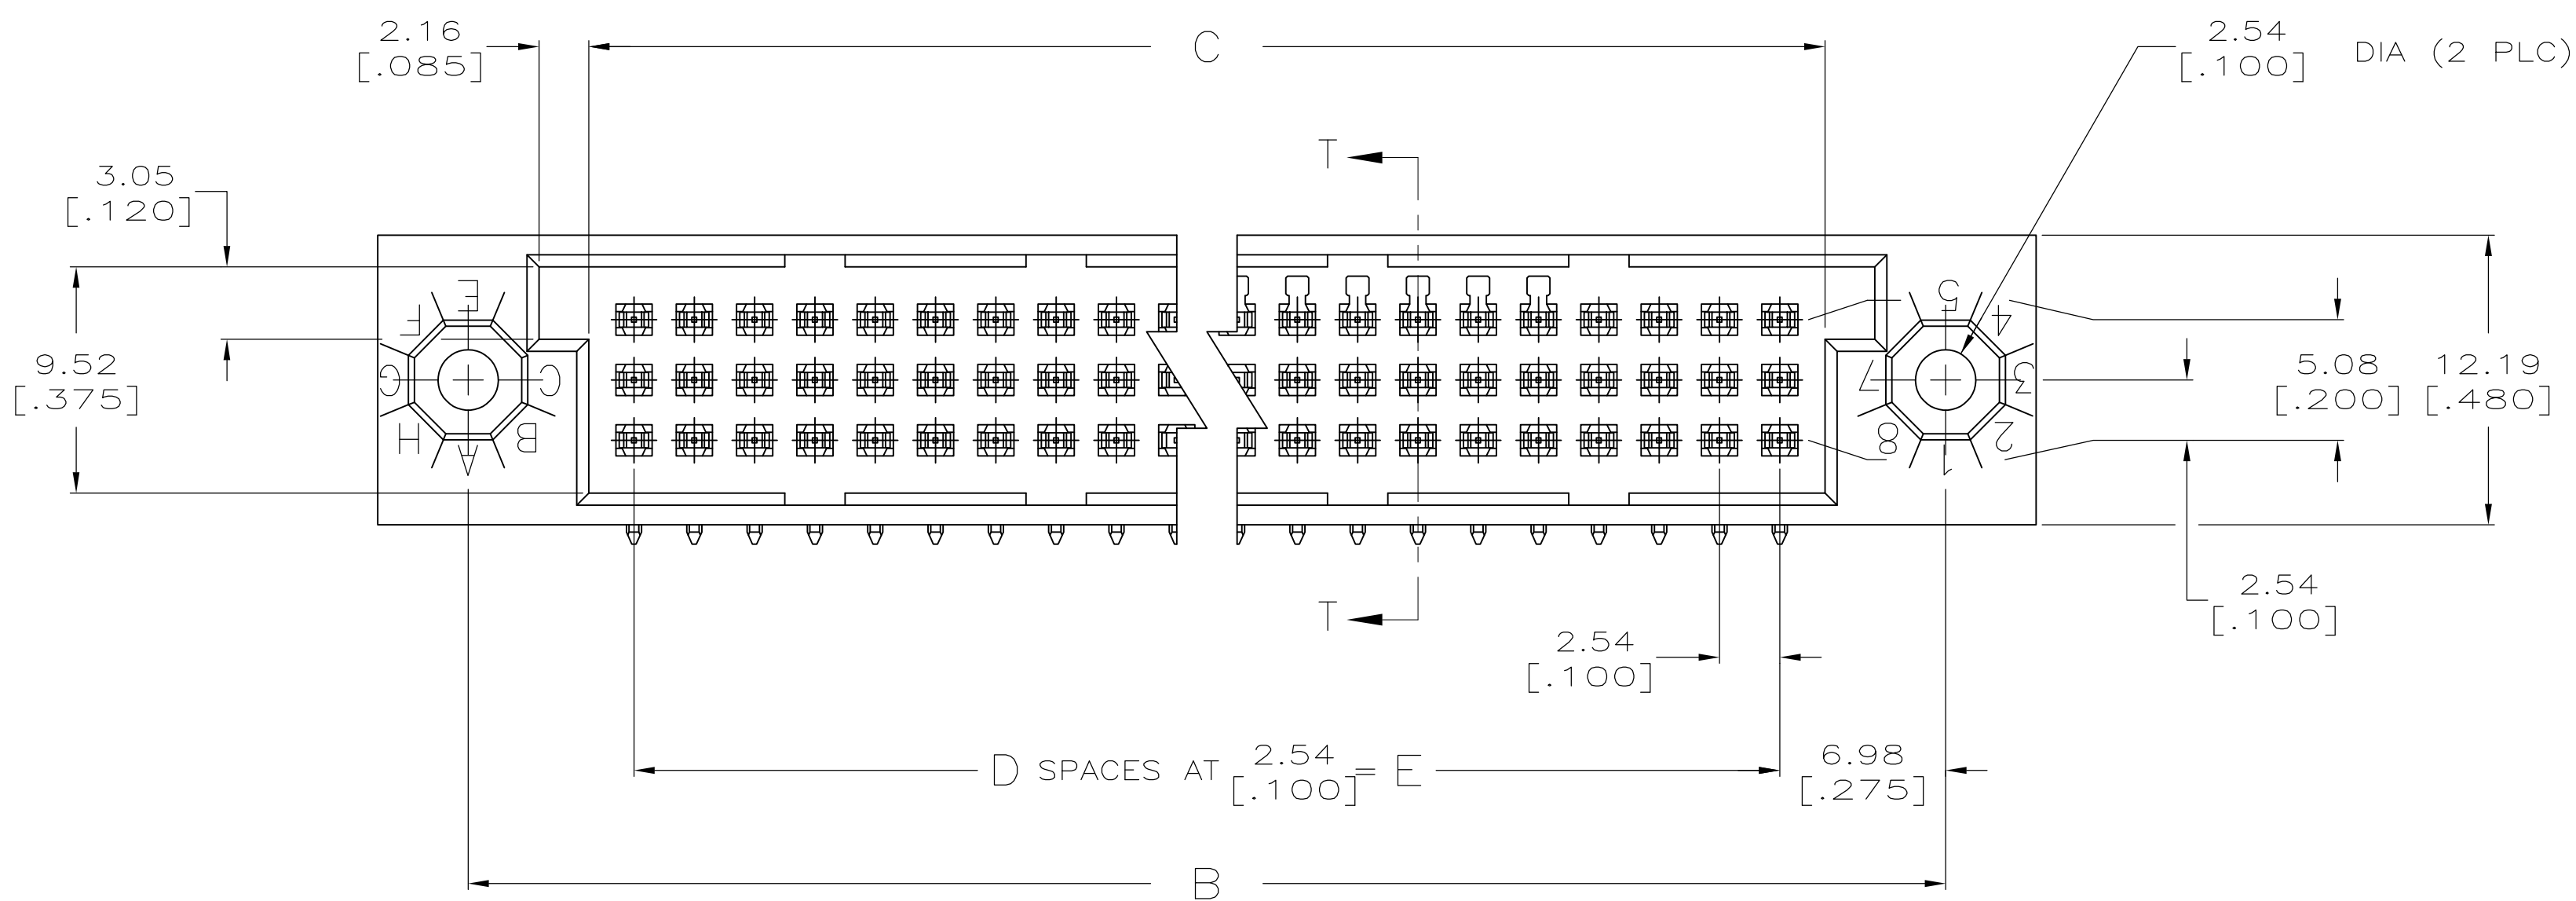


REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
M	13NOV15	REV PER ECO-15-015252	BJ		FY

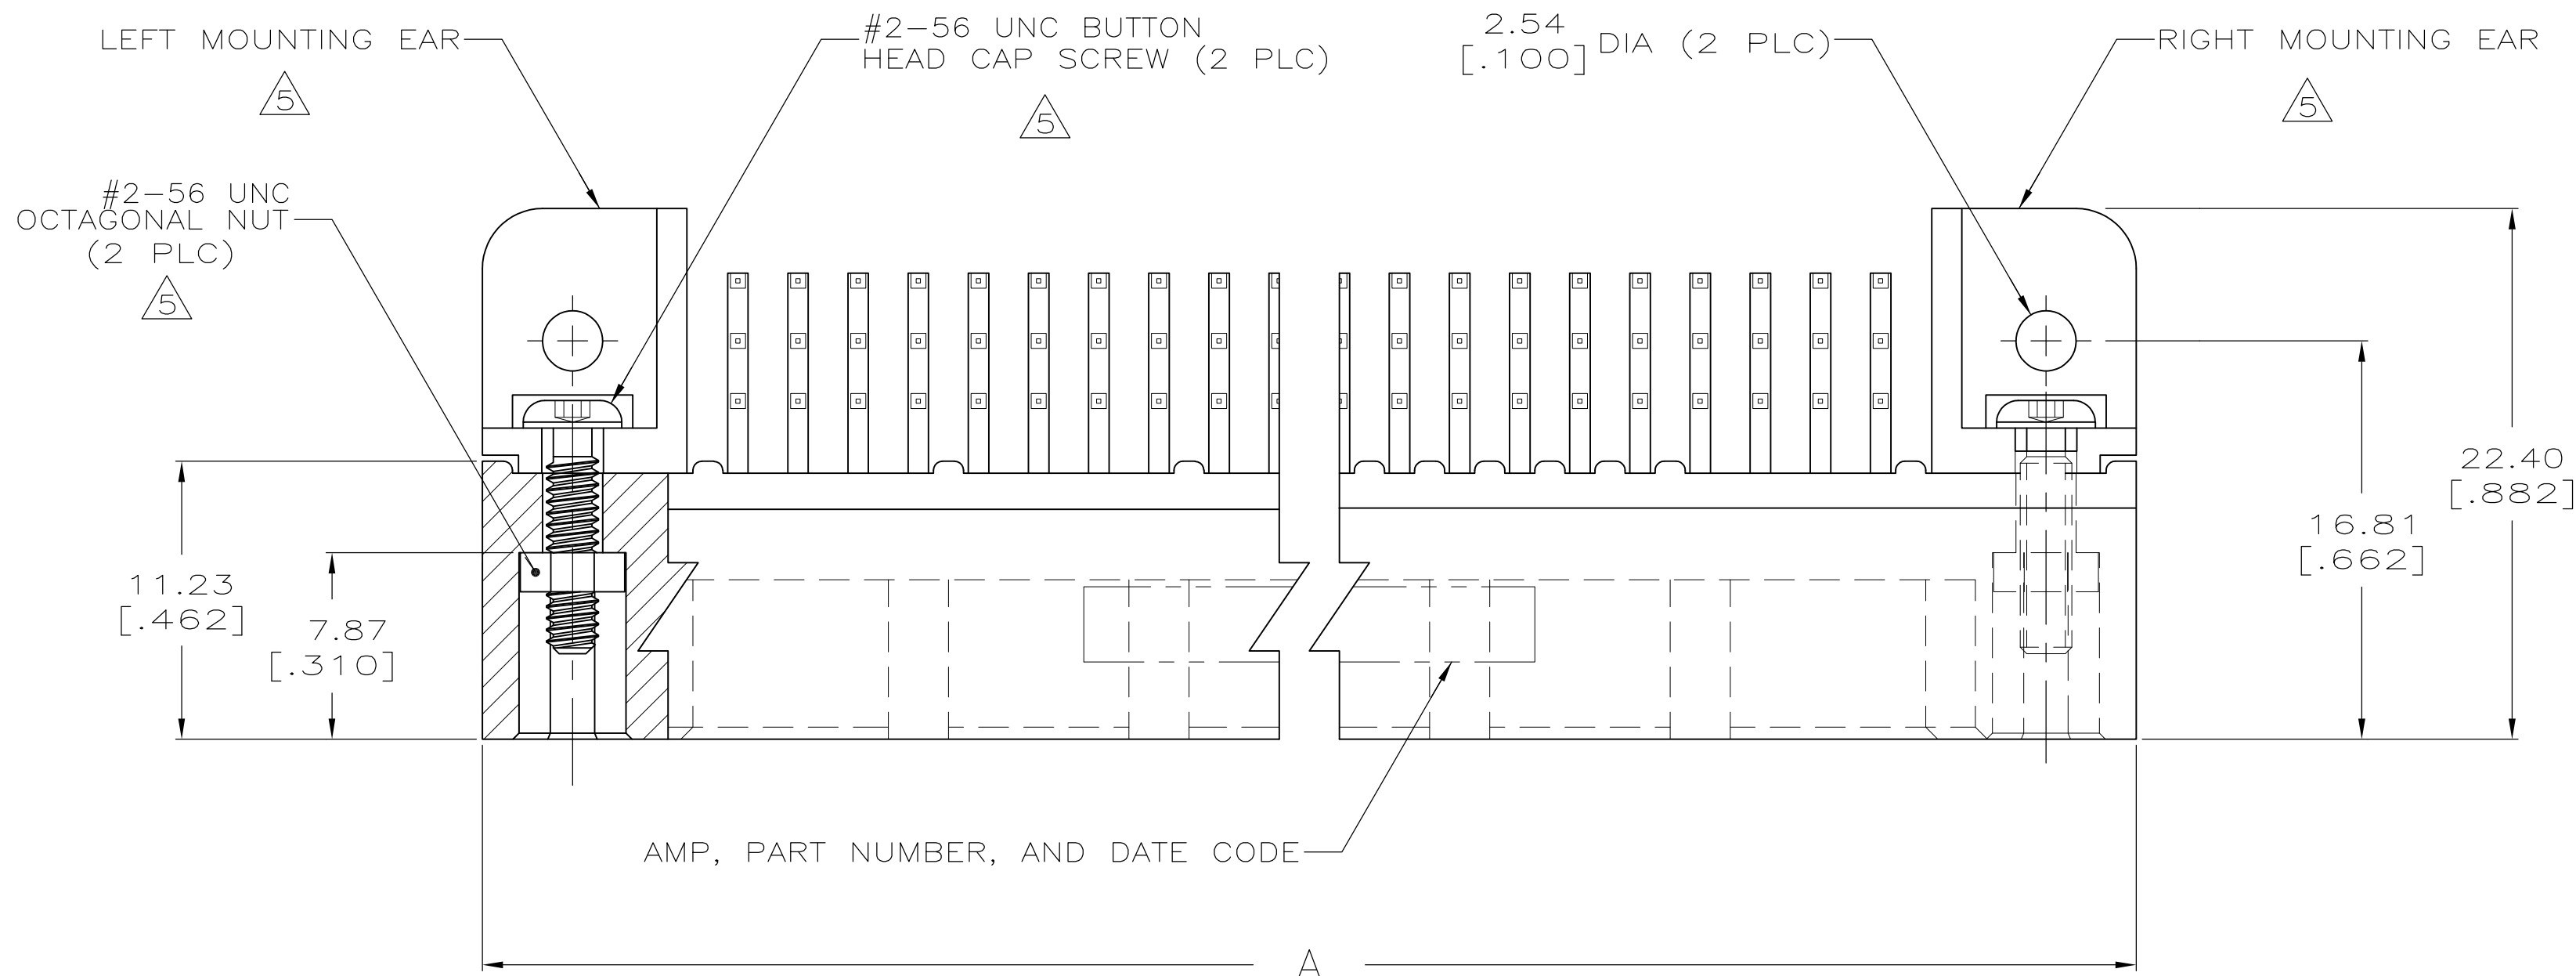

RECOMMENDED P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.K. SEIFRIED 05/17/90	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK J.D.WEARY 02/11/92		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J.D.WEARY 02/11/92	NAME	
	0 PLC ± -	PRODUCT SPEC	ASSY, HDI, 3 ROW, RIGHT ANGLE PIN	
	1 PLC ± -	APPLICATION SPEC	3.05 [.120] LONG SOLDER TAILS	
	2 PLC ± -	—	SIZE	
	3 PLC ± 0.13 [.005]	—	CAGE CODE	
	4 PLC ± -	—	DRAWING NO	
MATERIAL		WEIGHT 0	RESTRICTED TO	
FINISH		A1 00779 533288	—	
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 2	
			REV M	

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR—BLACK.

2

CONTACT MATERIAL: PHOSPHOR BRONZE.

3

FINISH:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108—9063; BASED ON TELCORDIA DR—1217—CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
SOLDER TAILS AREA: TIN—LEAD PLATED.

4

RIGHT ANGLE PIN RECOMMENDED P.C. BOARD HOLE SIZES ARE 0.94—1.09 [.037—.043]; RECOMMENDED PAD DIA IS 1.52 [.060].

5

MOUNTING EARS AND HARDWARE PURCHASED SEPARATELY, KIT PART NUMBER 533050—1.

6

DIMENSIONS IN BRACKETS ARE IN INCHES.


7

HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.

8

PART NUMBER IS OBSOLETE.

8	144.78 [5.700]	57	148.59 [5.850]	158.75 [6.250]	166.37 [6.550]	174	1—533288—8
8 7	251.46 [9.900]	99	255.27 [10.050]	265.43 [10.450]	273.05 [10.750]	300	1—533288—7
8 7	238.76 [9.400]	94	242.57 [9.550]	252.73 [9.950]	260.35 [10.250]	285	1—533288—6
8 7	226.06 [8.900]	89	229.87 [9.050]	240.03 [9.450]	247.65 [9.750]	270	1—533288—5
8 7	213.36 [8.400]	84	217.17 [8.550]	227.33 [8.950]	234.95 [9.250]	255	1—533288—4
8 7	200.66 [7.900]	79	204.47 [8.050]	214.63 [8.450]	222.25 [8.750]	240	1—533288—3
8	187.96 [7.400]	74	191.77 [7.550]	201.93 [7.950]	209.55 [8.250]	225	1—533288—2
8	175.26 [6.900]	69	179.07 [7.050]	189.23 [7.450]	196.85 [7.750]	210	1—533288—1
8	162.56 [6.400]	64	166.37 [6.550]	176.53 [6.950]	184.15 [7.250]	195	1—533288—0
8	149.86 [5.900]	59	153.67 [6.050]	163.83 [6.450]	171.45 [6.750]	180	533288—9
8	137.16 [5.400]	54	140.97 [5.550]	151.13 [5.950]	158.75 [6.250]	165	533288—8
	124.46 [4.900]	49	128.27 [5.050]	138.43 [5.450]	146.05 [5.750]	150	533288—7
8	111.76 [4.400]	44	115.57 [4.550]	125.73 [4.950]	133.35 [5.250]	135	533288—6
	99.06 [3.900]	39	102.87 [4.050]	113.03 [4.450]	120.65 [4.750]	120	533288—5
8	86.36 [3.400]	34	90.17 [3.550]	100.33 [3.950]	107.95 [4.250]	105	533288—4
8	78.74 [3.100]	31	82.55 [3.250]	92.71 [3.650]	100.33 [3.950]	96	533288—3
	73.66 [2.900]	29	77.47 [3.050]	87.63 [3.450]	95.25 [3.750]	90	533288—2
8	60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	75	533288—1
	E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.K. SEIFRIED 05/17/90		 TE Connectivity	
		CHK J.D.WEARY 02/11/92			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± —		APVD J.D.WEARY 02/11/92	
		1 PLC ± —		PRODUCT SPEC	
		2 PLC ± —		APPLICATION SPEC	
3 PLC ± 0.13 [.005]		4 PLC ± —		SIZE	
ANGLES		FINISH		CAGE CODE	
MATERIAL		WEIGHT		DRAWING NO	
1 2		3		A1 00779 533288	
CUSTOMER DRAWING				RESTRICTED TO	

4805 (1/15)

SCALE 4:1

SHEET 2 OF 2

REV M