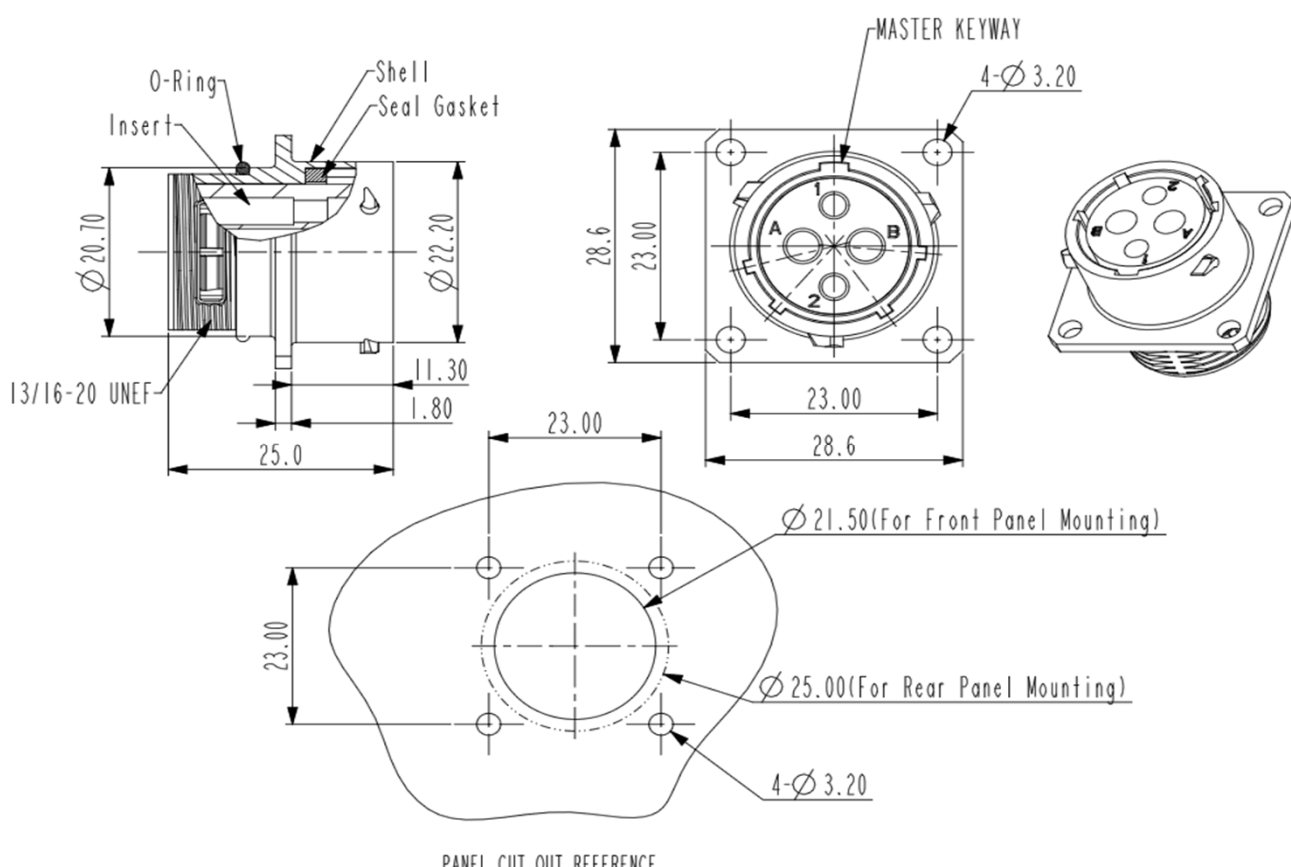


CONFIGURATION		PART NUMBER
Female Receptacle, 4 Pin, 16Awg & 2.5mm , Shell 14		RT00142SNH
DIMENSIONS		
 The technical drawings include a side view showing the O-Ring, Insert, Shell, and Seal Gasket. Dimensions include a total height of 20.70, a shell height of 22.20, a base diameter of 25.0, and a mounting hole diameter of 13/16-20 UNEF. The front view shows a square flange with a 23.00 x 23.00 mm body, 28.6 mm outer dimensions, and four mounting holes of 3.20 mm diameter. A master keyway is indicated. The panel cut out reference shows a 23.00 mm square with a 21.50 mm hole for front panel mounting and a 25.00 mm hole for rear panel mounting, with four 3.20 mm mounting holes.		
TECHNICAL DATA		
TEMPERATURE RANGE:	-40°C to + 105°C	
PROTECTION:	IP67 in mated condition and in combination with sealed backshell	
VOLTAGE RATING:	350V	
HOUSING BODY:	Zinc Alloy, Nickel Plated	
COUPLING NUT:		
INSERT:	Glass-filled Thermoplastic UL94-V0	
SEAL:	NBR	
CURRENT:	2-16Awg at 13A and 2-2.5mm at 23A	
CONTACT SIZE:	16Awg & 2.5mm	
APPROVALS:	UL ECBT2	