
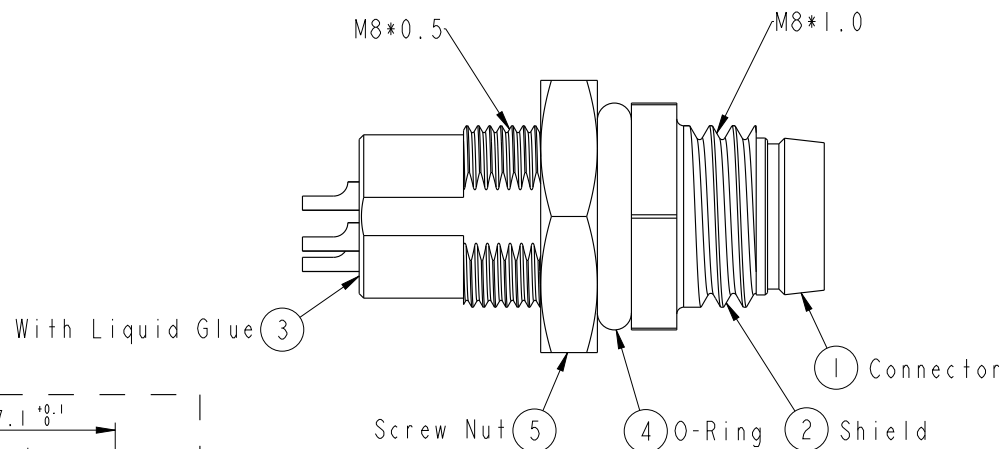
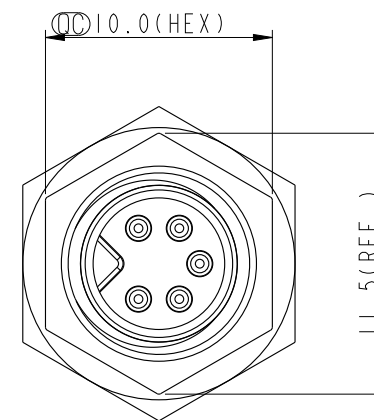


Pin Assignment
Front View



Recommended
Panel Cut-Out

Note:

- * **①** Important Dimension.
- * Waterproof Rate: IP67.
- * Housing: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Shield: Zinc Alloy, Nickel Plated.
- * Screw Nut: Copper Alloy, Nickel Plated.
- * O-Ring: EPDM, Black.
- * For Panel Thickness Max 3.5mm.
- * Nut Torque: 4~6 kgf.cm.

UNIT: mm

TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^\circ$

TITLE	M8 5Pin Panel M Conn. M Pin
-------	-----------------------------

SCALE 3:1

SIZE	A4
------	----

SHEET	OF
-------	----

QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	8A-05PMMS-SH7001
---------	------------------

DWG NO
8A-05PMMS-SH7001

CUSTOMER	ALTW
----------	------

DRAWN BY
Tony_leng

CHECKED BY	Jimmy
------------	-------

APPROVED BY
Jerry

DATE	2013-10-22
------	------------

DATE	2013-10-22
------	------------

DATE	2013-10-22
------	------------