

January 9, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>

HIGH DENSITY, HIGH VOLTAGE, STANDARD RECOVERY RECTIFIER ASSEMBLY

QUICK REFERENCE DATA


- Low reverse leakage current
- Low distributed and ground capacitance
- Corona free design
- Easy aluminium base mount
- Low forward voltage drop

- $V_R = 5kV - 15kV$
- $I_F = 1A$
- $t_{rr} = 2.0\mu S$
- $I_R = 1.0\mu A$

ABSOLUTE MAXIMUM RATINGS

	Symbol	SDH5KM	SDH10KM	SDH15KM	Unit
Working reverse voltage	V_{RWM}	5.0	10.0	15.0	kV
Surge reverse voltage	V_{RSM}	5.5	11.0	16.5	kV
Average forward current in air @ 25°C in oil @ 55°C	$I_{F(AV)}$	← 1.0 → ← 1.0 →			A A
Non-repetitive surge current $t_p = 8.3ms$, @ 25°C	I_{FSM}	← 50 →			A
Storage temperature range	T_{STG}	← -55 to +150 →			°C
Operating temperature range	T_{OP}	← -55 to +150 →			°C
Body length ±0.030"	dim C	3.36	4.04	4.04	inches

MECHANICAL

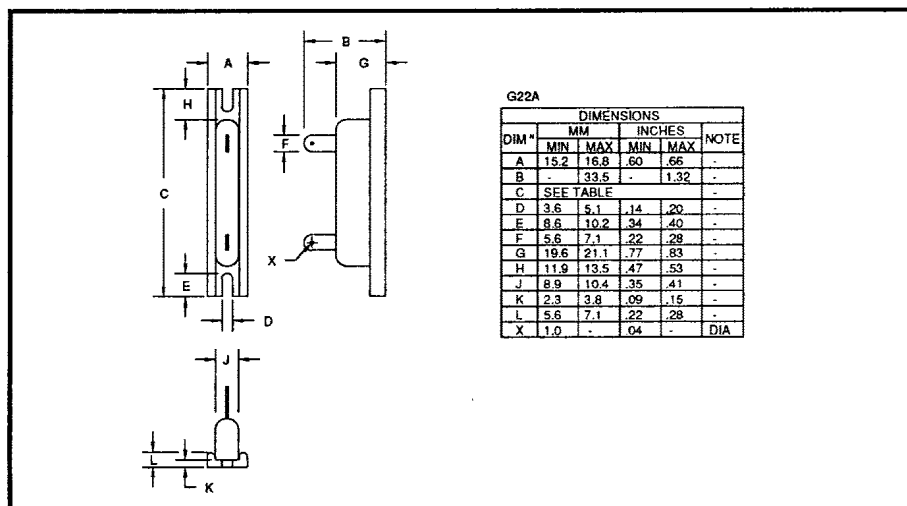


January 9, 1998

ELECTRICAL CHARACTERISTICS

	Symbol	SDH5KM	SDH10KM	SDH15KM	Unit
Max. forward voltage drop @ $I_F = 1.0A$, $T_j = 25^\circ C$	V_F	6.6	13.2	19.8	V
Max. reverse leakage current @ V_{RWM} , $T_j = 25^\circ C$	I_R	←	1.0 →	←	μA
@ V_{RWM} , $T_j = 100^\circ C$	I_R	←	25 →	←	μA
Max. reverse recovery time ¹ 0.5A I_F to 1.0A I_R . Recovers to 0.25A I_{RR} .	t_{rr}	←	2.0 →	←	μS
Max. fusing current $t_p = 8.3ms$	I^2t	←	10 →	←	A^2S

¹ Measured on discrete devices prior to assembly

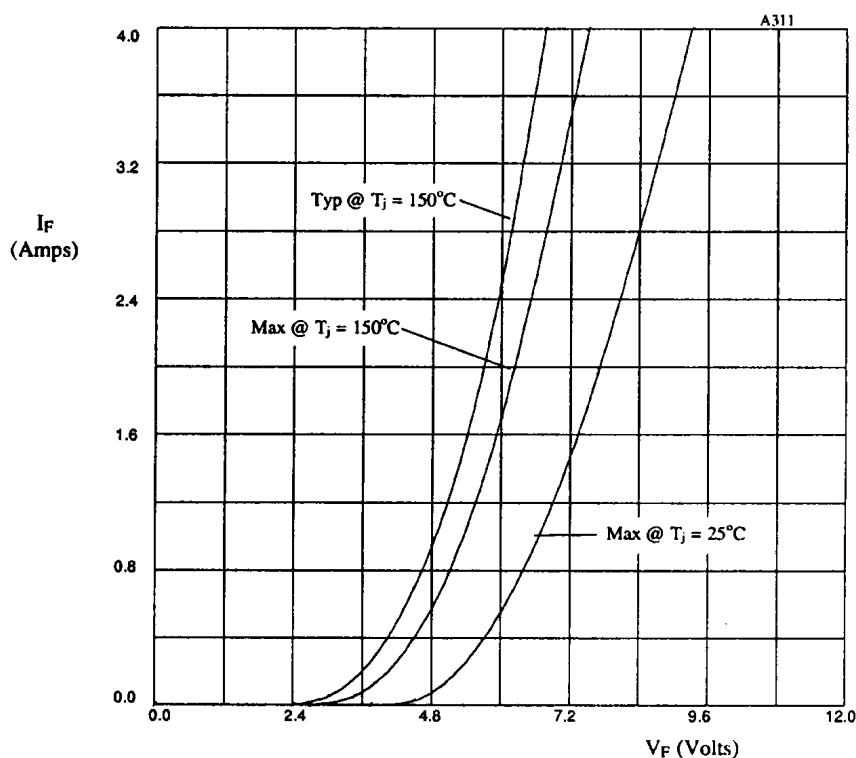

Multiplication tables for fig 1.

SDH5KM	X-axis	x1
SDH10KM	X-axis	x2
SDH15KM	X-axis	x3

Fig 1. Forward voltage drop as a function of forward current
for use with multiplication table 1.