

# MTC 6



## Rugged, X86-based Vehicle Mount Terminal Series

- 10, 12 or 15 inch Color-TFT
- Resistive touchscreen
- Wi-Fi with integrated diversity antenna
- Extreme temperature range
- Fully rugged
- Optimum protection against shock and vibration

## Introduction



The MTC 6 is a rugged vehicle mount terminal that increases efficiency in logistics – in the distribution center, port, warehouse, and even in the deep-freeze area. The integrated Advantech-DLoG antenna solution enables Wi-Fi diversity in excellence and hence improves reliable data transmission even under complex receive and transmit conditions. Therefore the Advantech-DLoG terminals are a choice for the logistics industry.

## Specifications

System	CPU	AMD Dual Core G-T40E 1.0 GHz, 2 GB RAM
	Storage	CFast, starting at 4 GB
Housing		Completely sealed, fanless design Coated aluminium
Dimensions/Weight (without antenna, accessories)	MTC 6/10	W x H x D: 285 mm x 229 mm x 78 mm, 3 kg / 11.2 in x 9.0 in x 3.1 in, 6.6 lbs
	MTC 6/12	W x H x D: 325 mm x 258 mm x 79 mm, 3.5 kg / 12.8 in x 10.1 in x 3.1 in, 7.7 lbs
	MTC 6/15	W x H x D: 388 mm x 305 mm x 82 mm, 4.9 kg / 15.3 in x 12.0 in x 3.2 in, 10.9 lbs
Display	MTC 6/10	10.4" Color-TFT, SVGA 800 x 600 or XGA 1024 x 768
	MTC 6/12	12.1" Color-TFT, XGA 1024 x 768
	MTC 6/15	15" Color-TFT, XGA 1024 x 768
Front Keys		8 front keys, incl. 4 configurable function keys
Touchscreen		Resistive touchscreen
Software	Operating Systems	MS® WE8S, WE 8.1 Ind Pro, WES 2009, WinXP Pro, WES 7, Win 7 Prof, Linux
	Emulations (third-party)	VT100, VT220, IBM 5250, TN 3270, Citrix ICA Client®, RDP Client
Communication	Wi-Fi	IEEE 802.11 a/b/g/n with diversity antenna, optional
	LAN	RJ45 10/100/1000 Mbps
Interfaces	Serial	1 x RS-232, COM 1 optional 5 V
	USB	3 x USB, incl. 1 x Service USB
Audio / Voice		Speaker integrated
	Advantech-DLoG Voice Kit	Speaker & microphone via handset; optional; available for MTC 6/10 and MTC 6/12
Power Supply		12/24 VDC or 24/48 VDC, galvanically isolated
		Deep voltage drops can be bridged 20 s
Environmental	IP Protection Class	IP66
	Operating temperature	-30 to +50 °C / -22 to +122 °F
	Relative humidity	10 to 90% at 40 °C, non condensing
	Shock/Vibration	Class 5M3 according DIN EN 60721-3-5 MIL-STD 810F (US Highway Truck)
Approvals	Certifications	CE/FCC Class B and TELEC Japan with AMD CPU CE/FCC Class B, CCC China, BSMI / NCC Taiwan and TELEC Japan with Intel CPU
	TOS (Port)	Navis, SPARCS 3.7 and N4 (Port Terminal Operating System) under Windows® XP Jade Master Terminal Vehicle Mounted Application under Windows® XP

# MTC 6

## Dimensions

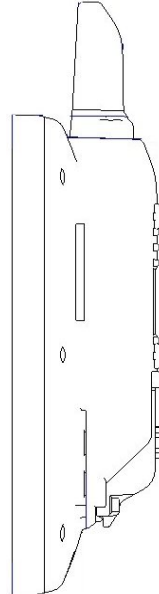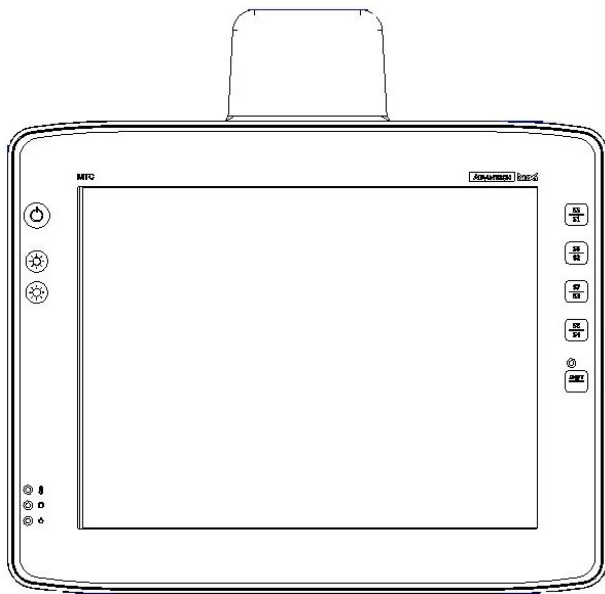

### MTC 6/10:

10 inch display,  
Dimensions without antenna in mm  
W: 285 x H: 230 x D: 78


### MTC 6/12:

12 inch display,  
Dimensions without antenna in mm  
W: 325 x H: 258 x D: 79

### MTC 6/15:

15 inch display,  
Dimensions without antenna in mm  
W: 388 x H: 305 x D: 82

## Connectors

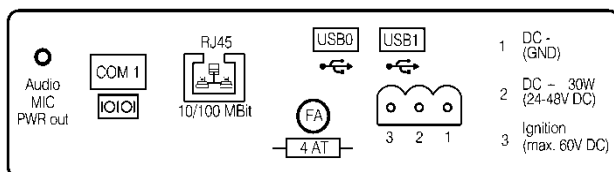

## Mounting Variants (Selection)



## Advantech-DLoG Partner Contact

## Accessories/Options

Scanners and scanner mountings

Keyboards and keyboard mountings

Terminal mountings (wide range of mounting brackets, RAM solutions etc.)

USB Stick

USB Recovery Stick

External CD/DVD ROM drive

Mouse

Voice Kit (available for MTC 6/10 and MTC 6/12)

Remote Wi-Fi Antenna (for mounting on vehicle roof)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advantech:](#)

[MTC6-0-0WRSLWEB001](#) [MTC6-0-0WRRMSEB001](#) [MTC6-0-0WRRLSEB001](#) [MTC6-2-0WRSLWEB001](#)