


Ultra-R2 Dissipative Rubber Table Mat

Meets ANSI/ESD S20.20 worksurface required limit (and recommendation of ANSI/ESD S4.1) tested per ANSI/ESD S4.1 and ESD TR53. Resistance to solvents, hot solder and soldering irons makes the Ultra-R2 Dissipative Rubber Table Mat a versatile static-safe worksurface. Electrical performance is accomplished by using a two-layer combination of top color static dissipative and bottom black conductive rubber materials. Compatible with Constant Monitors. Available in rolls, mats and mats with ground cord.

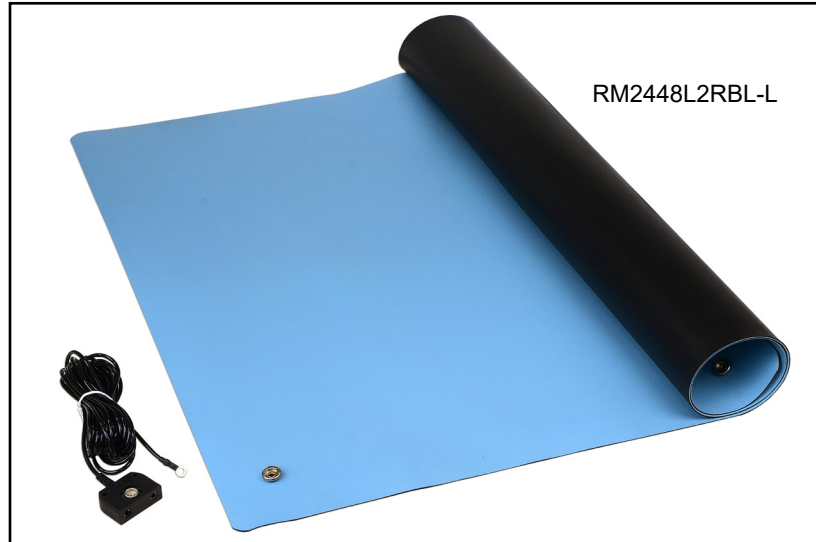

RM2448L2RBL-L

Mat Item Numbers

Size	Blue
*24" x 48" (0.6 m x 1.2 m)	RM2448L2RBL

Mat Includes:

- 1 Table Mat, size as specified
- 2 Female 3/8" Snaps (Snaps installed on long side of mat)

*Includes 1/2" radius corners

Table Mat Kit Item Numbers

Size	Blue
*24" x 48" (0.6 m x 1.2 m)	RM2448L2RBL-L

Table Mat Kit Includes:

- 1 Table Mat, size as specified
- 1 [LPCGC151M](#) 15' (4.6 m) Ground Cord
- 2 Female 3/8" Snaps (Snaps installed on long side of mat)

*Includes 1/2" radius corners

Roll Item Numbers

Size	Blue
2' x 50' (0.6 m x 15.2 m)	RM24600L2RBL
2.5' x 50' (0.8 m x 15.2 m)	RM30600L2RBL
3' x 50' (0.9 m x 15.2 m)	RM36600L2RBL
4' x 50' (1.2 m x 15.2 m)	RM48600L2RBL

Includes roll of matting material.

Properties	Typical Value	Test Method
Thickness*	0.064" (1.6 mm)	
Color*	Blue	
Resistance		
Surface to Ground (Rtg)	1 x 10 ⁶ to < 1 x 10 ⁹ ohms	ANSI/ESD S4.1
Surface to Surface (Rtt)	1 x 10 ⁶ to < 1 x 10 ⁹ ohms	ANSI/ESD S4.1
Tolerance	Width +/- 0.250" Length +/- 0.250"	

*Color, texture and thickness may vary between lots and mills.

Specifications and procedures subject to change without notice.



Made in the
United States of America

ULTRA-R2 DISSIPATIVE RUBBER TABLE MAT

926 JR Industrial Drive, Sanford, NC 27332
WEB SITE: [StaticControl.com](#)
PHONE (919) 718-0000

**DRAWING
NUMBER**
Ultra-R2 Series

DATE
May
2017

SCS