




Euro-connector-block 4 mm², divisible 1 - 12-poles, raised base, also with wire-protection (DSS)

Assembly-bore : Ø 3,5 mm
Casing : natural polyamide
Insert : zinc-plated steel
Screw : M 3 nickel-plated steel
Wire-protection : chrome-nickel-steel

This connector is available from 1 - 12-poles or can be cut according to your requirements. Delivery will be effected ready for installation with slightly twisted screws, which are protected against self-loosening in the insulation-part.
Also available with glow wire resistance 750°C, flame < 2 sec. (IEC/EN60335-1).






Accessories as description-labels and components are available.

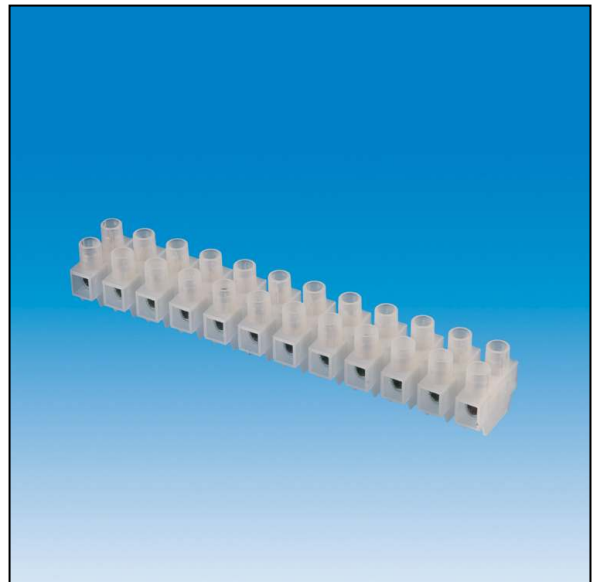

32A
450V

PTI 250

T110



No. of poles	Length	Article-no.	kg/100 pcs.	Article-no. with DS	kg/100 pcs.	Article-no. with DSS	kg/100 pcs.	Article-no. with MB	kg/100 pcs.	Pkg. qty.
1	7,0	1012950001	0,3	-	-	1012953001	0,3	1012956001	0,3	1000
2	17,0	1012950002	0,6	-	-	1012953002	0,6	1012956002	0,6	1000
3	27,0	1012950003	0,86	-	-	1012953003	0,86	1012956003	0,86	500
4	37,0	1012950004	1,12	-	-	1012953004	1,12	1012956004	1,12	500
5	47,0	1012950005	1,43	-	-	1012953005	1,43	1012956005	1,43	250
6	57,0	1012950006	1,75	-	-	1012953006	1,75	1012956006	1,75	250
7	67,0	1012950007	2,06	-	-	1012953007	2,06	1012956007	2,06	100
8	77,0	1012950008	2,31	-	-	1012953008	2,31	1012956008	2,31	100
9	87,0	1012950009	2,57	-	-	1012953009	2,57	1012956009	2,57	100
10	97,0	1012950010	2,88	-	-	1012953010	2,88	1012956010	2,88	100
11	107,0	1012950011	3,18	-	-	1012953011	3,18	1012956011	3,18	100
12	117,0	1012950012	3,5	-	-	1012953012	3,5	1012956012	3,5	100

