


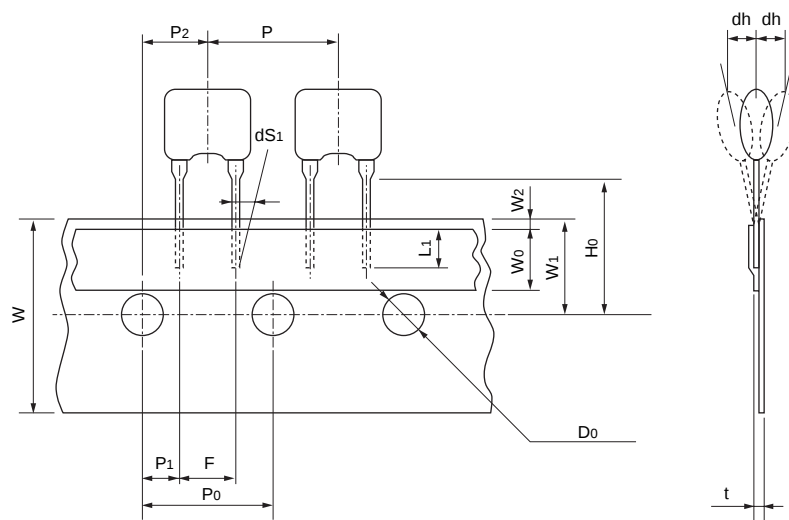

Item	Code	Dimensions	Tolerance	Remarks
Lead length under the hold down tape	L1	3.0 min.	-	
Pitch of component	P	12.7	± 0.5	
Pitch of sprocket hole (1)	P0	12.7	± 0.2	
Length from hole center to lead	P1	3.85	± 0.5	
Length from hole center to component center	P2	6.35	± 0.5	
Lead spacing	F	5.0	+0.5 -0.2	
Slant to the forward or backward	dh	0	± 1.0	
Slant to the left or right	dS1	0	± 1.0	
Width of carrier tape	W	18.0	± 0.5	
Width of hold down tape	W0	6.0 min.	-	
Position of sprocket hole	W1	9.0	± 0.5	
Gap of hold down tape and carrier tape	W2	0	+0.5 -0.0	Hold down tape doesn't exceed the carrier tape
Distance between the center of sprocket hole and lead stopper	H0	18.0	± 0.5	
Diameter of sprocket hole	D0	$\varnothing 4.0$	± 0.2	
Total tape thickness	t	0.6	± 0.2	
Pitch of sprocket hole (2)	Po20	254.0	± 1.5	The pitch of 20 sprocket holes

(in mm)