


BOARD PIN #	INPUT
1	+V (V in)
2	V (GND)
3	OUT 1
4	OUT 2
5	OUT (GND)

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	21.6	24.0	26.4
INPUT CURRENT: (mA)	150	200	250
OUTPUT VOLTAGE: (Vrms)	900	1000	1100
OUTPUT CURRENT (mA) x 2	4.5	5.5	6.5
OUTPUT FREQUENCY: (kHz)	24	27	30
OPERATING TEMP: (CELSIUS)	0	25	50

CAUTION:
REVERSE POLARITY TO INVERTER
INPUT WILL CAUSE AN OPEN CIRCUIT
IN FUSE F1.

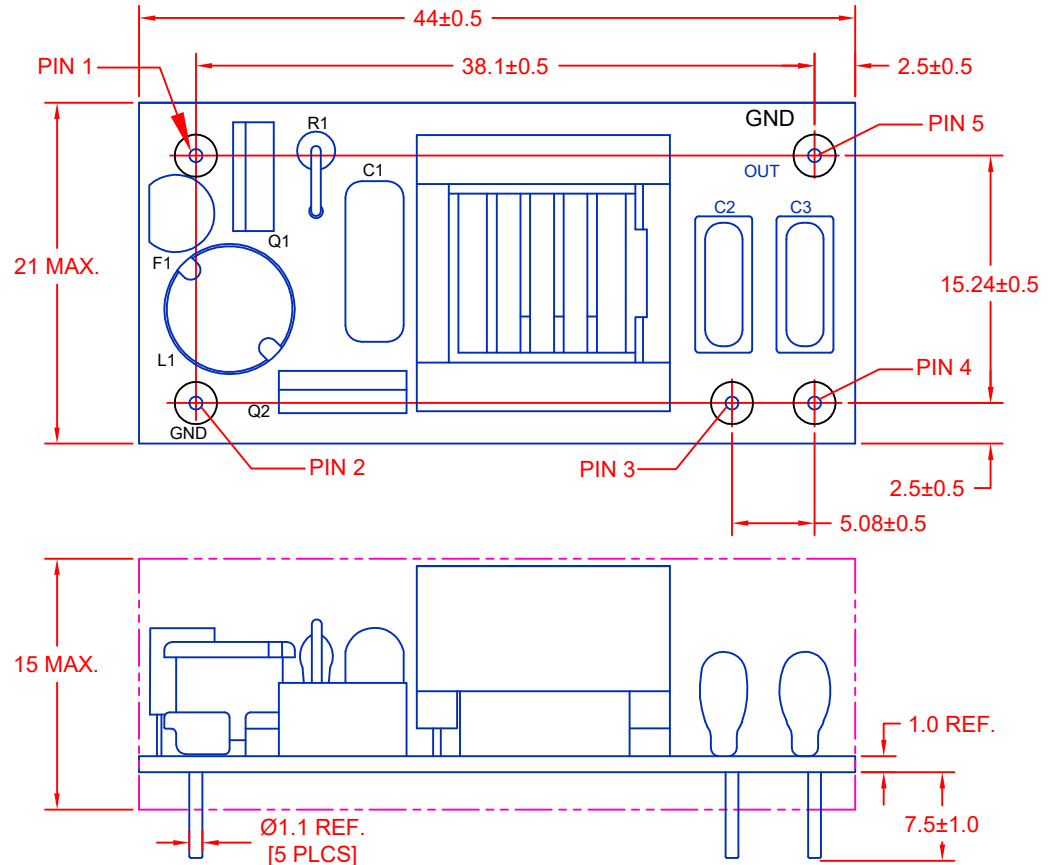

*JKL PART NO.: BXA-24529

*RoHS COMPLIANCE
(CONTACT JKL FOR RoHS LOT IDENTIFICATION)

METRIC		DIMENSIONS ARE IN MILLIMETERS		TOLERANCE UNLESS OTHERWISE SPECIFIED		JKL COMPONENTS CORPORATION	
THIRD ANGLE PROJECTION		1 PL +/- 0.3		2 PL +/- 0		TITLE	
DRAWN BY L. WENGSTROM		APPV'D BY L.R.		DATE 6/4/18		24 V CCFL POWER SUPPLY	
- CAD DRAWING -		SCALE		RELEASED DATE 3/10/03		REVISION DATE 6/4/18	
MANUAL REVISIONS NOT PERMITTED		NONE		FSCM NO. 55335		DRAWING NO. BXA-24529	
				REV. NO. B		SHEET 1 OF 1	

REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	3/10/03
A	CHNG DIMS & ADD RoHS NOTE	5/10/06
B	DIMS & CHAR. CHART CHANGES	6/4/18