

# Micropower Precision Shunt Voltage Reference

## FEATURES

- **Initial Voltage Accuracy: 0.05%**
- **Low Operating Current: 10 $\mu$ A**
- **Low Drift: 10ppm/ $^{\circ}$ C Max**
- Less Than 1 $\Omega$  Dynamic Impedance
- Available in 1.25V, 2.5V, 4.096V and 5V in SO-8 and TO-92 Packages
- 1.25V and 2.5V Available in MSOP Package
- Both Commercial and Industrial Temperature Range Parts Are Available

## APPLICATIONS

- Portable Meters
- Precision Regulators
- A/D and D/A Converters
- Calibrators

## DESCRIPTION


The LT<sup>®</sup>1634 is a micropower, precision, shunt voltage reference. The bandgap reference uses trimmed precision thin film resistors to achieve 0.05% initial voltage accuracy. Improved curvature correction technique guarantees 10ppm/ $^{\circ}$ C maximum temperature drift. Advances in design, processing and packaging techniques guarantee 10 $\mu$ A operation and low temperature cycling hysteresis. The LT1634 does not require an output compensation capacitor, but is stable with capacitive loads. Low dynamic impedance makes the LT1634 reference easy to use from unregulated supplies.

The LT1634 reference can be used as a high performance upgrade to the LM185/LM385, LT1004 and LT1034 where lower power and guaranteed temperature drift is required.


 LT, LTC and LT are registered trademarks of Linear Technology Corporation.

## TYPICAL APPLICATION

### Super Accurate $\pm 4.096$ V Output References

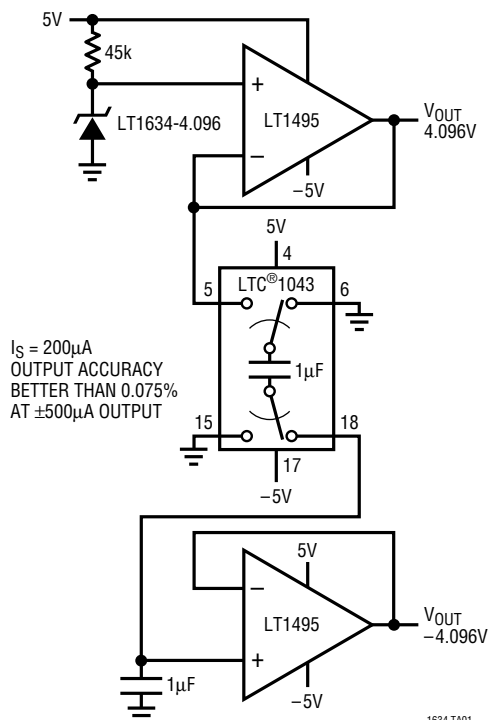

### Temperature Drift

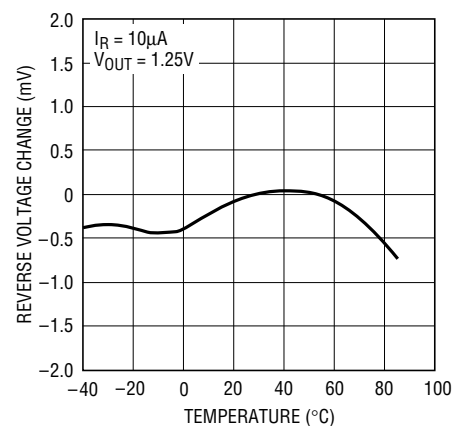

1634 TA02

## ABSOLUTE MAXIMUM RATINGS

### Operating Current

|                       |       |
|-----------------------|-------|
| 1.25V .....           | 100mA |
| 2.5V .....            | 50mA  |
| 4.096V, 5V .....      | 30mA  |
| Forward Current ..... | 20mA  |

### Operating Temperature Range

|                                            |                |
|--------------------------------------------|----------------|
| Commercial .....                           | 0°C to 70°C    |
| Industrial .....                           | –40°C to 85°C  |
| Storage Temperature Range (Note 1) ...     | –65°C to 150°C |
| Lead Temperature (Soldering, 10 sec) ..... | 300°C          |

## PACKAGE/ORDER INFORMATION

| <p>TOP VIEW</p> <p>MS8 PACKAGE<br/>8-LEAD PLASTIC MSOP<br/><math>T_{JMAX} = 125^{\circ}\text{C}</math>, <math>\theta_{JA} = 250^{\circ}\text{C/W}</math></p>   |                  | <p>TOP VIEW</p> <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO<br/><math>T_{JMAX} = 125^{\circ}\text{C}</math>, <math>\theta_{JA} = 190^{\circ}\text{C/W}</math></p>                                                                                                                                        |                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| ORDER PART NUMBER                                                                                                                                              | MS8 PART MARKING | ORDER PART NUMBER                                                                                                                                                                                                                                                                                | S8 PART MARKING                                                                                                                                      |
| LT1634BCMS8-1.25<br>LT1634BCMS8-2.5                                                                                                                            | LTCV<br>LTDF     | LT1634ACS8-1.25<br>LT1634ACS8-2.5<br>LT1634ACS8-4.096<br>LT1634ACS8-5<br>LT1634AIS8-1.25<br>LT1634AIS8-2.5<br>LT1634AIS8-4.096<br>LT1634AIS8-5<br>LT1634BCS8-1.25<br>LT1634BCS8-2.5<br>LT1634BCS8-4.096<br>LT1634BCS8-5<br>LT1634BIS8-1.25<br>LT1634BIS8-2.5<br>LT1634BIS8-4.096<br>LT1634BIS8-5 | 634A1<br>634A2<br>634A4<br>634A5<br>634AI1<br>634AI2<br>634AI4<br>634AI5<br>634B1<br>634B2<br>634B4<br>634B5<br>634BI1<br>634BI2<br>634BI4<br>634BI5 |
| <p>BOTTOM VIEW</p> <p>Z PACKAGE<br/>3-LEAD PLASTIC TO-92<br/><math>T_{JMAX} = 125^{\circ}\text{C}</math>, <math>\theta_{JA} = 190^{\circ}\text{C/W}</math></p> |                  | ORDER PART NUMBER                                                                                                                                                                                                                                                                                |                                                                                                                                                      |
|                                                                                                                                                                |                  | LT1634CCZ-1.25<br>LT1634CCZ-2.5<br>LT1634CCZ-4.096<br>LT1634CCZ-5                                                                                                                                                                                                                                |                                                                                                                                                      |

\*Connected internally. Do Not Connect external circuitry to these pins.

\*\*Connect to ground in user application.

Consult factory for Military grade parts.

## AVAILABLE OPTIONS

| TEMPERATURE   | ACCURACY (%) | TEMPERATURE COEFFICIENT<br>(ppm/°C) | PACKAGE TYPE                        |                                                                       |                                                                   |
|---------------|--------------|-------------------------------------|-------------------------------------|-----------------------------------------------------------------------|-------------------------------------------------------------------|
|               |              |                                     | MS8                                 | S8                                                                    | Z                                                                 |
| 0°C to 70°C   | 0.05         | 10                                  |                                     | LT1634ACS8-1.25<br>LT1634ACS8-2.5<br>LT1634ACS8-4.096<br>LT1634ACS8-5 |                                                                   |
| –40°C to 85°C | 0.05         | 10                                  |                                     | LT1634AIS8-1.25<br>LT1634AIS8-2.5<br>LT1634AIS8-4.096<br>LT1634AIS8-5 |                                                                   |
| 0°C to 70°C   | 0.05         | 25                                  | LT1634BCMS8-1.25<br>LT1634BCMS8-2.5 | LT1634BCS8-1.25<br>LT1634BCS8-2.5<br>LT1634BCS8-4.096<br>LT1634BCS8-5 |                                                                   |
| –40°C to 85°C | 0.05         | 25                                  |                                     | LT1634BIS8-1.25<br>LT1634BIS8-2.5<br>LT1634BIS8-4.096<br>LT1634BIS8-5 |                                                                   |
| 0°C to 70°C   | 0.20         | 25                                  |                                     |                                                                       | LT1634CCZ-1.25<br>LT1634CCZ-2.5<br>LT1634CCZ-4.096<br>LT1634CCZ-5 |

## 1.25V ELECTRICAL CHARACTERISTICS (Note 2)

| PARAMETER                                         | CONDITIONS                                                                      | MIN               | TYP            | MAX              | UNITS                |
|---------------------------------------------------|---------------------------------------------------------------------------------|-------------------|----------------|------------------|----------------------|
| Reverse Breakdown Voltage                         | LT1634ACS8/LT1634BCMS8/LT1634BCS8/<br>LT1634AIS8/LT1634BIS8 ( $I_R = 10\mu A$ ) | 1.24937<br>–0.05  | 1.250          | 1.25062<br>0.05  | V<br>%               |
|                                                   | LT1634CCZ ( $I_R = 10\mu A$ )                                                   | 1.24750<br>–0.20  | 1.250          | 1.25250<br>0.20  | V<br>%               |
|                                                   | LT1634ACS8 ( $I_R = 10\mu A$ )                                                  | 1.24849<br>–0.12  | 1.250          | 1.25149<br>0.12  | V<br>%               |
|                                                   | LT1634AIS8 ( $I_R = 10\mu A$ )                                                  | 1.24781<br>–0.175 | 1.250          | 1.25218<br>0.175 | V<br>%               |
|                                                   | LT1634BCS8/LT1634BCMS8 ( $I_R = 10\mu A$ )                                      | 1.24718<br>–0.225 | 1.250          | 1.25281<br>0.225 | V<br>%               |
|                                                   | LT1634BIS8 ( $I_R = 10\mu A$ )                                                  | 1.24547<br>–0.362 | 1.250          | 1.25453<br>0.362 | V<br>%               |
|                                                   | LT1634CCZ ( $I_R = 10\mu A$ )                                                   | 1.24531<br>–0.375 | 1.250          | 1.25469<br>0.375 | V<br>%               |
| Reverse Breakdown Change<br>with Current (Note 3) | $10\mu A \leq I_R \leq 2mA$                                                     |                   | 0.25<br>0.30   | 1<br>2           | mV<br>mV             |
|                                                   | $2mA \leq I_R \leq 20mA$                                                        |                   | 2<br>2         | 8<br>10          | mV<br>mV             |
| Minimum Operating Current                         |                                                                                 |                   |                | 7                | $\mu A$              |
| Temperature Coefficient                           | LT1634A, $I_R = 10\mu A$                                                        |                   | 4              | 10               | ppm/°C               |
|                                                   | LT1634B, $I_R = 10\mu A$                                                        |                   | 10             | 25               | ppm/°C               |
| Reverse Dynamic Impedance (Note 4)                | $10\mu A \leq I_R \leq 2mA$                                                     |                   | 0.125<br>0.150 | 0.5<br>1.0       | $\Omega$<br>$\Omega$ |
|                                                   |                                                                                 |                   |                |                  |                      |
| Low Frequency Noise (Note 5)                      | $I_R = 10\mu A$ , $0.1Hz \leq f \leq 10Hz$                                      |                   | 10             |                  | $\mu V_{P-P}$        |
| Hysteresis (Note 6)                               | $\Delta T = -40^\circ C$ to $85^\circ C$                                        |                   | 160            |                  | ppm                  |
|                                                   | $\Delta T = 0^\circ C$ to $70^\circ C$                                          |                   | 40             |                  | ppm                  |

## 2.5V ELECTRICAL CHARACTERISTICS (Note 2)

| PARAMETER                                         | CONDITIONS                                                                      | MIN               | TYP          | MAX              | UNITS            |
|---------------------------------------------------|---------------------------------------------------------------------------------|-------------------|--------------|------------------|------------------|
| Reverse Breakdown Voltage                         | LT1634ACS8/LT1634BCMS8/LT1634BCS8/<br>LT1634AIS8/LT1634BIS8 ( $I_R = 10\mu A$ ) | 2.49875<br>-0.05  | 2.500        | 2.50125<br>0.05  | V<br>%           |
|                                                   | LT1634CCZ ( $I_R = 10\mu A$ )                                                   | 2.49500<br>-0.20  | 2.500        | 2.50500<br>0.20  | V<br>%           |
|                                                   | LT1634ACS8 ( $I_R = 10\mu A$ )                                                  | 2.49700<br>-0.12  | 2.500        | 2.50300<br>0.12  | V<br>%           |
|                                                   | LT1634AIS8 ( $I_R = 10\mu A$ )                                                  | 2.49562<br>-0.175 | 2.500        | 2.50437<br>0.175 | V<br>%           |
|                                                   | LT1634BCMS8/LT1634BCS8 ( $I_R = 10\mu A$ )                                      | 2.49437<br>-0.225 | 2.500        | 2.50562<br>0.225 | V<br>%           |
|                                                   | LT1634BIS8 ( $I_R = 10\mu A$ )                                                  | 2.49094<br>-0.362 | 2.500        | 2.50906<br>0.362 | V<br>%           |
|                                                   | LT1634CCZ ( $I_R = 10\mu A$ )                                                   | 2.49062<br>-0.375 | 2.500        | 2.50937<br>0.375 | V<br>%           |
| Reverse Breakdown Change<br>with Current (Note 3) | $10\mu A \leq I_R \leq 2mA$                                                     |                   | 0.30<br>0.40 | 1.5<br>3.0       | mV<br>mV         |
|                                                   | $2mA \leq I_R \leq 20mA$                                                        |                   | 2<br>2       | 8<br>10          | mV<br>mV         |
| Minimum Operating Current                         |                                                                                 |                   |              | 8                | $\mu A$          |
| Temperature Coefficient                           | LT1634A, $I_R = 10\mu A$                                                        |                   | 4            | 10               | ppm/ $^{\circ}C$ |
|                                                   | LT1634B, $I_R = 10\mu A$                                                        |                   | 10           | 25               | ppm/ $^{\circ}C$ |
| Reverse Dynamic Impedance (Note 4)                | $10\mu A \leq I_R \leq 2mA$                                                     |                   | 0.15         | 0.75             | $\Omega$         |
|                                                   |                                                                                 |                   | 0.20         | 1.50             | $\Omega$         |
| Low Frequency Noise (Note 5)                      | $I_R = 10\mu A$ , $0.1Hz \leq f \leq 10Hz$                                      |                   | 15           |                  | $\mu V_{P-P}$    |
| Hysteresis (Note 6)                               | $\Delta T = -40^{\circ}C$ to $85^{\circ}C$                                      |                   | 160          |                  | ppm              |
|                                                   | $\Delta T = 0^{\circ}C$ to $70^{\circ}C$                                        |                   | 40           |                  | ppm              |

## 4.096V ELECTRICAL CHARACTERISTICS (Note 2)

| PARAMETER                                         | CONDITIONS                                                          | MIN               | TYP        | MAX              | UNITS    |
|---------------------------------------------------|---------------------------------------------------------------------|-------------------|------------|------------------|----------|
| Reverse Breakdown Voltage                         | LT1634ACS8/LT1634BCS8/<br>LT1634AIS8/LT1634BIS8 ( $I_R = 20\mu A$ ) | 4.09395<br>-0.05  | 4.096      | 4.09805<br>0.05  | V<br>%   |
|                                                   | LT1634CCZ ( $I_R = 20\mu A$ )                                       | 4.08780<br>-0.20  | 4.096      | 4.10419<br>0.20  | V<br>%   |
|                                                   | LT1634ACS8 ( $I_R = 20\mu A$ )                                      | 4.09108<br>-0.12  | 4.096      | 4.10091<br>0.12  | V<br>%   |
|                                                   | LT1634AIS8 ( $I_R = 20\mu A$ )                                      | 4.08883<br>-0.175 | 4.096      | 4.10317<br>0.175 | V<br>%   |
|                                                   | LT1634BCS8 ( $I_R = 20\mu A$ )                                      | 4.08678<br>-0.225 | 4.096      | 4.10522<br>0.225 | V<br>%   |
|                                                   | LT1634BIS8 ( $I_R = 20\mu A$ )                                      | 4.08115<br>-0.362 | 4.096      | 4.11085<br>0.362 | V<br>%   |
|                                                   | LT1634CCZ ( $I_R = 20\mu A$ )                                       | 4.08064<br>-0.375 | 4.096      | 4.11137<br>0.375 | V<br>%   |
| Reverse Breakdown Change<br>with Current (Note 3) | $20\mu A \leq I_R \leq 2mA$                                         |                   | 0.3<br>0.4 | 1.5<br>3.0       | mV<br>mV |
|                                                   | $2mA \leq I_R \leq 20mA$                                            |                   | 2<br>2     | 8<br>10          | mV<br>mV |
| Minimum Operating Current                         |                                                                     |                   |            | 15               | $\mu A$  |

## 4.096V ELECTRICAL CHARACTERISTICS (Note 2)

| PARAMETER                          | CONDITIONS                                 | MIN | TYP  | MAX  | UNITS         |
|------------------------------------|--------------------------------------------|-----|------|------|---------------|
| Temperature Coefficient            | LT1634A, $I_R = 20\mu A$                   | ●   | 4    | 10   | ppm/°C        |
|                                    | LT1634B, $I_R = 20\mu A$                   | ●   | 10   | 25   | ppm/°C        |
| Reverse Dynamic Impedance (Note 4) | $20\mu A \leq I_R \leq 2mA$                | ●   | 0.15 | 0.75 | $\Omega$      |
|                                    |                                            |     | 0.20 | 1.50 | $\Omega$      |
| Low Frequency Noise (Note 5)       | $I_R = 20\mu A$ , $0.1Hz \leq f \leq 10Hz$ |     | 30   |      | $\mu V_{P-P}$ |
| Hysteresis (Note 6)                | $\Delta T = -40^\circ C$ to $85^\circ C$   |     | 160  |      | ppm           |
|                                    | $\Delta T = 0^\circ C$ to $70^\circ C$     |     | 40   |      | ppm           |

## 5V ELECTRICAL CHARACTERISTICS (Note 2)

| PARAMETER                                         | CONDITIONS                                                          | MIN                 | TYP        | MAX              | UNITS         |
|---------------------------------------------------|---------------------------------------------------------------------|---------------------|------------|------------------|---------------|
| Reverse Breakdown Voltage                         | LT1634ACS8/LT1634BCS8/<br>LT1634AIS8/LT1634BIS8 ( $I_R = 20\mu A$ ) | 4.99750<br>-0.05    | 5.000      | 5.00250<br>0.05  | V<br>%        |
|                                                   | LT1634CCZ ( $I_R = 20\mu A$ )                                       | 4.99000<br>-0.20    | 5.000      | 5.01000<br>0.20  | V<br>%        |
|                                                   | LT1634ACS8 ( $I_R = 20\mu A$ )                                      | ● 4.99400<br>-0.12  | 5.000      | 5.00600<br>0.12  | V<br>%        |
|                                                   | LT1634AIS8 ( $I_R = 20\mu A$ )                                      | ● 4.99125<br>-0.175 | 5.000      | 5.00875<br>0.175 | V<br>%        |
|                                                   | LT1634BCS8 ( $I_R = 20\mu A$ )                                      | ● 4.98875<br>-0.225 | 5.000      | 5.01125<br>0.225 | V<br>%        |
|                                                   | LT1634BIS8 ( $I_R = 20\mu A$ )                                      | ● 4.98188<br>-0.362 | 5.000      | 5.01813<br>0.362 | V<br>%        |
|                                                   | LT1634CCZ ( $I_R = 20\mu A$ )                                       | ● 4.98126<br>-0.375 | 5.000      | 5.01876<br>0.375 | V<br>%        |
| Reverse Breakdown Change<br>with Current (Note 3) | $20\mu A \leq I_R \leq 2mA$                                         | ●                   | 0.3<br>0.4 | 1.5<br>3.0       | mV<br>mV      |
|                                                   | $2mA \leq I_R \leq 20mA$                                            | ●                   | 2<br>2     | 8<br>10          | mV<br>mV      |
| Minimum Operating Current                         |                                                                     | ●                   |            | 15               | $\mu A$       |
| Temperature Coefficient                           | LT1634A, $I_R = 20\mu A$                                            | ●                   | 4          | 10               | ppm/°C        |
|                                                   | LT1634B, $I_R = 20\mu A$                                            | ●                   | 10         | 25               | ppm/°C        |
| Reverse Dynamic Impedance (Note 4)                | $20\mu A \leq I_R \leq 2mA$                                         | ●                   | 0.15       | 0.75             | $\Omega$      |
|                                                   |                                                                     |                     | 0.20       | 1.50             | $\Omega$      |
| Low Frequency Noise (Note 5)                      | $I_R = 20\mu A$ , $0.1Hz \leq f \leq 10Hz$                          |                     | 35         |                  | $\mu V_{P-P}$ |
| Hysteresis (Note 6)                               | $\Delta T = -40^\circ C$ to $85^\circ C$                            |                     | 160        |                  | ppm           |
|                                                   | $\Delta T = 0^\circ C$ to $70^\circ C$                              |                     | 40         |                  | ppm           |

The ● denotes specifications which apply over the full operating temperature range.

**Note 1:** If the part is stored outside of the specific operating temperature range, the output may shift due to hysteresis.

**Note 2:** ESD (Electrostatic Discharge) sensitive device. Use proper ESD handling precautions.

**Note 3:** Output requires  $0.1\mu F$  for operating current greater than 1mA.


**Note 4:** This parameter is guaranteed by “reverse breakdown change with current” test.

**Note 5:** Peak-to-peak noise is measured with a single highpass filter at 0.1Hz and 2-pole lowpass filter at 10Hz.


**Note 6:** Hysteresis in output voltage is created by package stress that differs depending on whether the IC was previously at a higher or lower temperature. Output voltage is always measured at 25°C but the IC is cycled to 85°C or -40°C before successive measurements. Hysteresis is roughly proportional to the square of the temperature change. Hysteresis is not normally a problem for operational temperature excursions where the instrument might be stored at high or low temperature.

# 1.25V TYPICAL PERFORMANCE CHARACTERISTICS


Reverse Characteristics

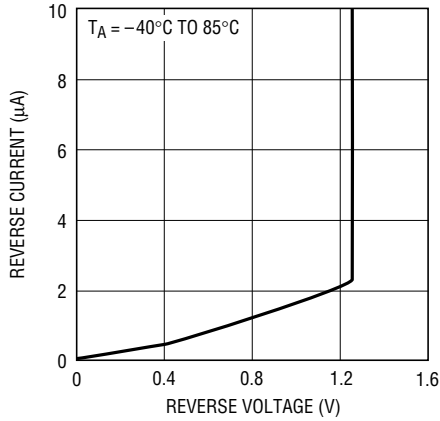


Temperature Drift

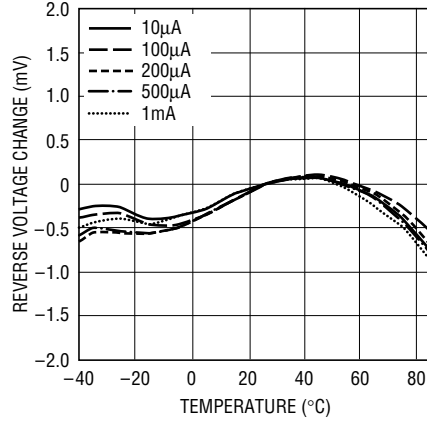


Reverse Voltage Change vs Current

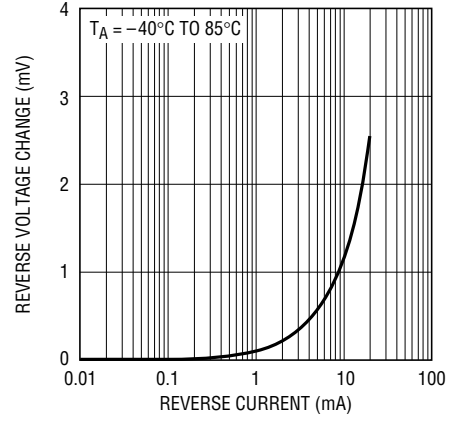


Reverse Dynamic Impedance

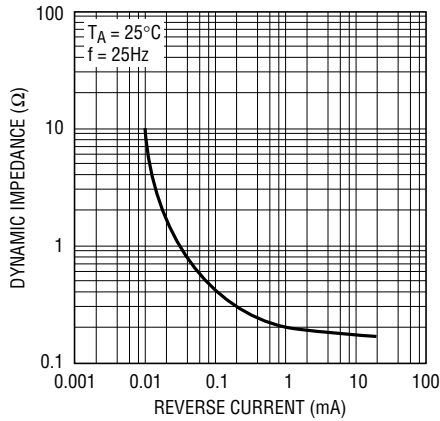


Dynamic Impedance vs Frequency

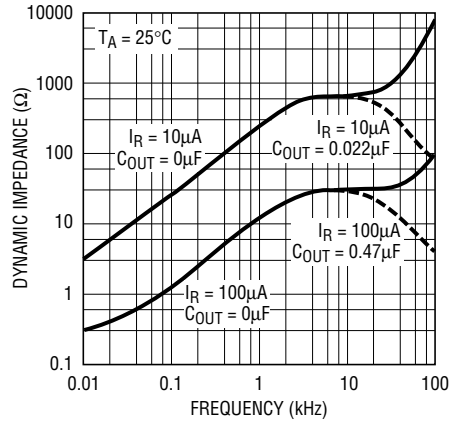


Forward Characteristics

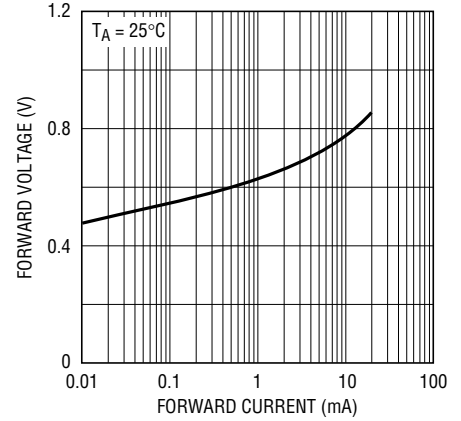


0.1Hz to 10Hz Noise

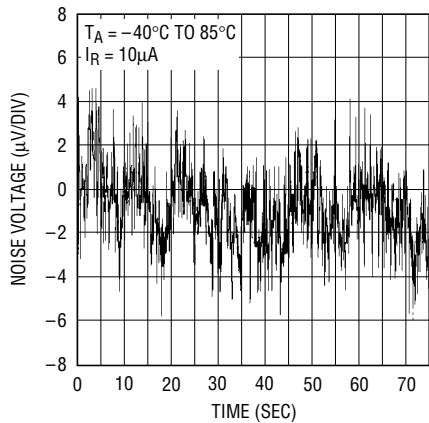

Response Time

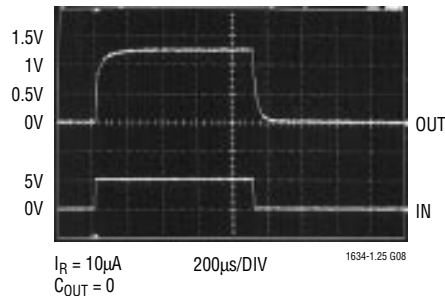


Response Time

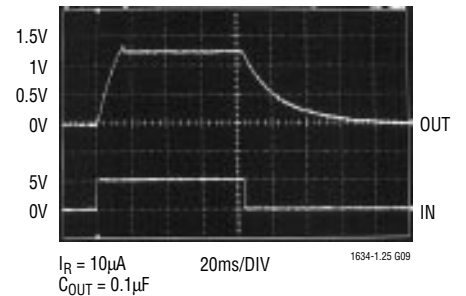


# 2.5V TYPICAL PERFORMANCE CHARACTERISTICS

Reverse Characteristics

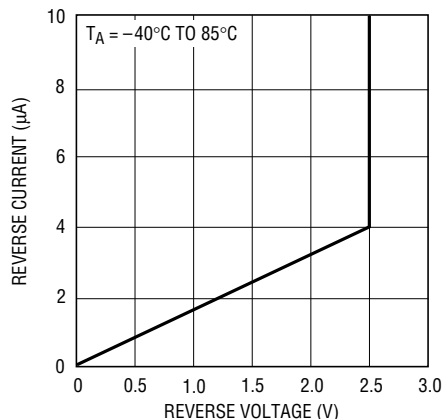


1634-2.5 G01

Temperature Drift

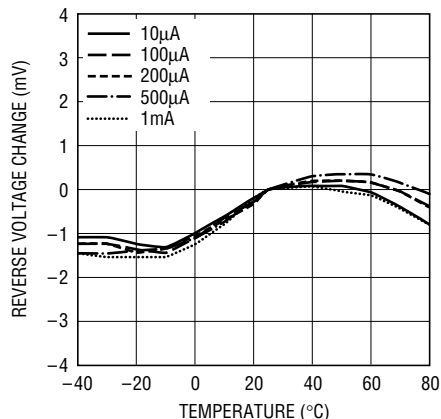


1634-2.5 G02

Reverse Voltage Change vs Current

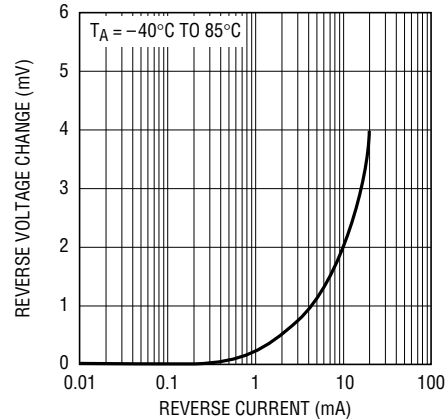


1634-2.5 G03

Reverse Dynamic Impedance

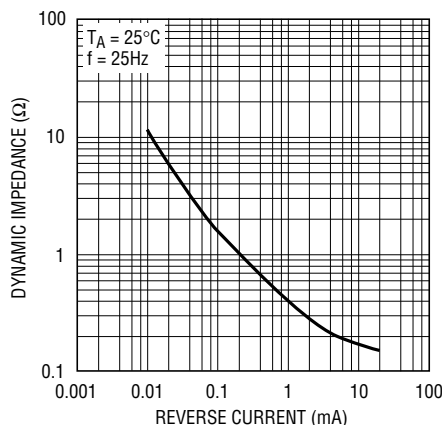


1635-2.5 G04

Dynamic Impedance vs Frequency

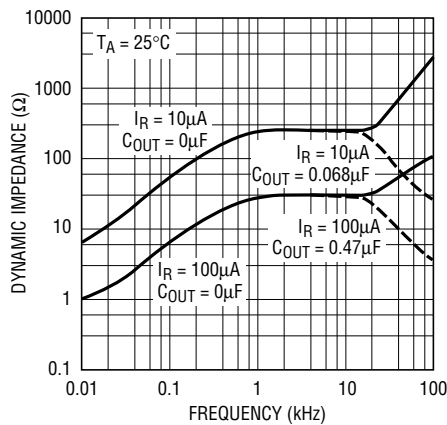


1634-2.5 G05

Forward Characteristics

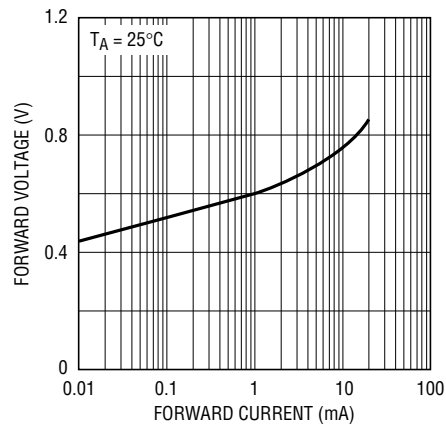


1634-2.5 G06

0.1Hz to 10Hz Noise

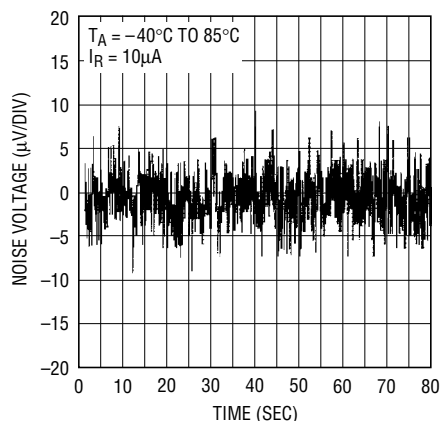


1634-2.5 G07

Response Time

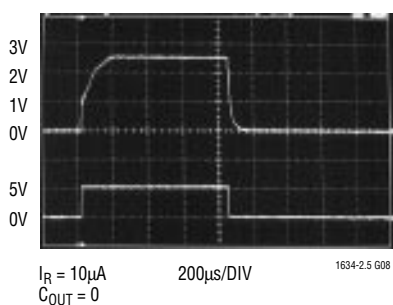

1634-2.5 G08


Response Time

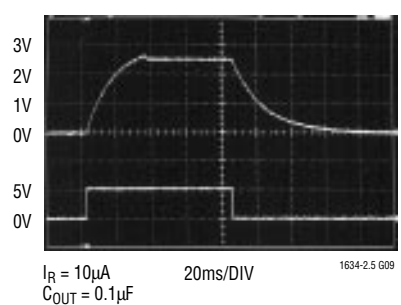


1634-2.5 G09

# 4.096V TYPICAL PERFORMANCE CHARACTERISTICS


Reverse Characteristics

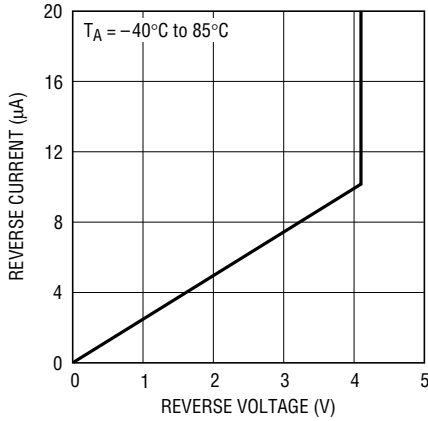


Temperature Drift

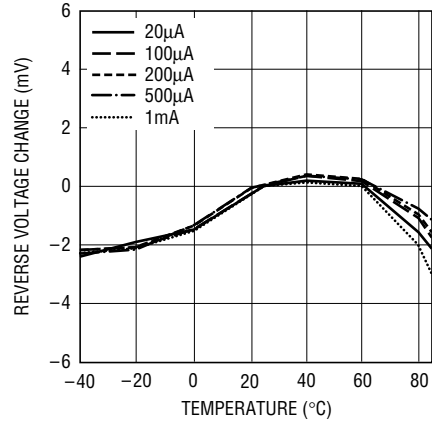


Reverse Voltage Change vs Current

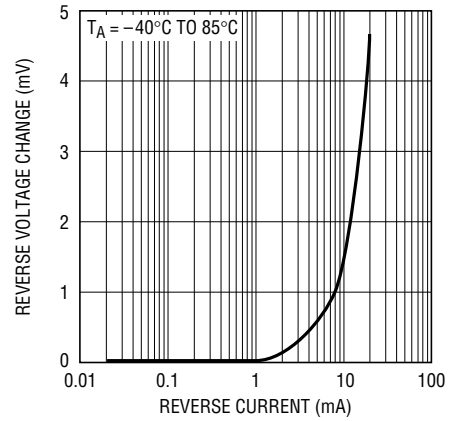


Reverse Dynamic Impedance

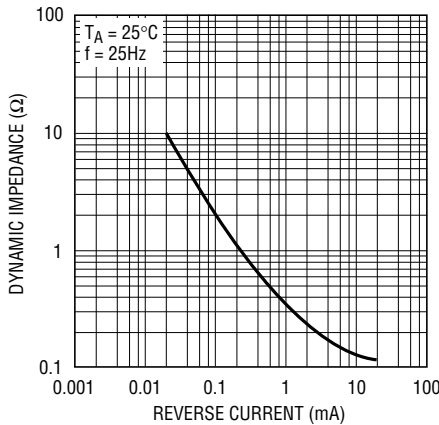


Dynamic Impedance vs Frequency

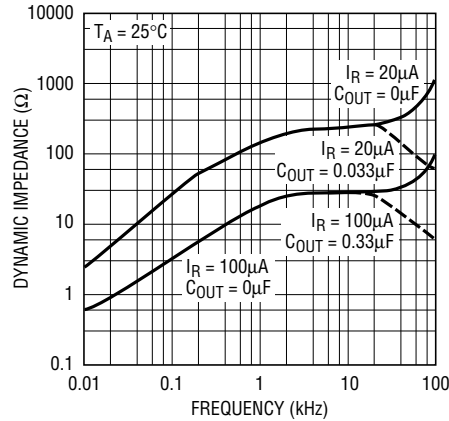


Forward Characteristics

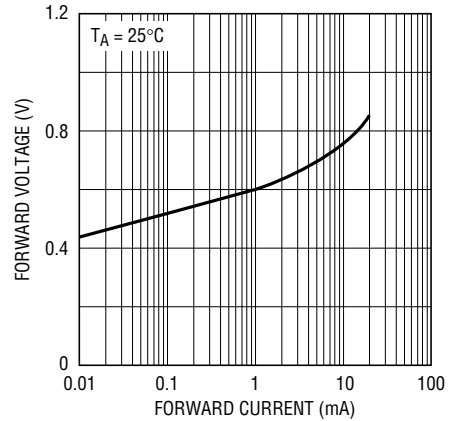


0.1Hz to 10Hz Noise

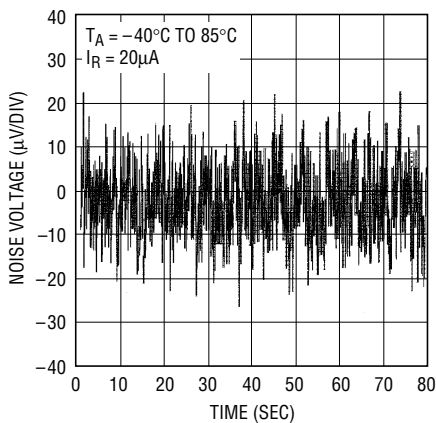

Response Time

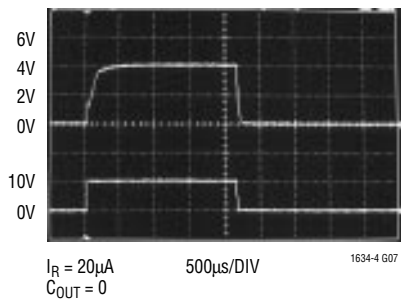


Response Time

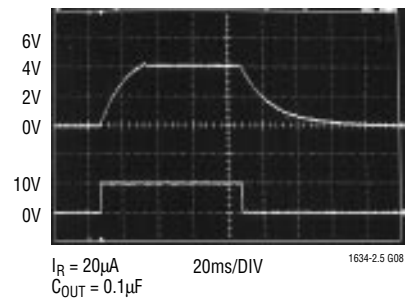


# 5V TYPICAL PERFORMANCE CHARACTERISTICS

Reverse Characteristics

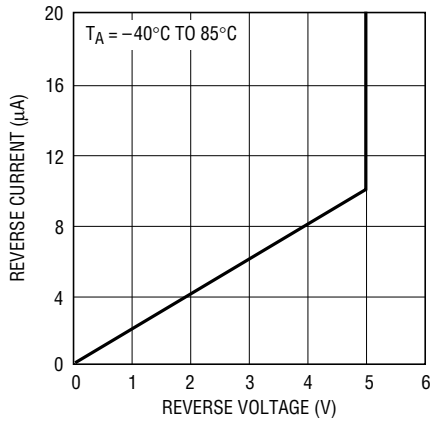


1634-5 G01

Temperature Drift

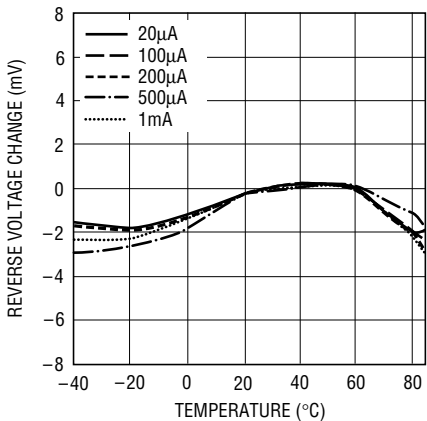


1634-5 G02

Reverse Voltage Change vs Current

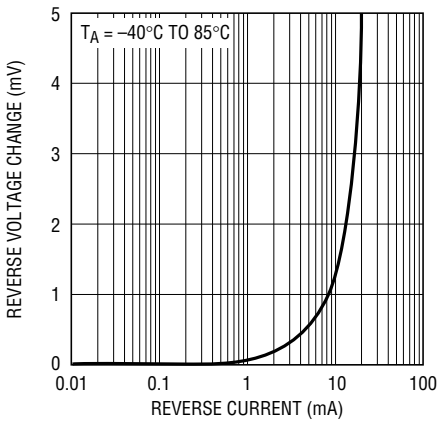


1634-5 G03

Reverse Dynamic Impedance

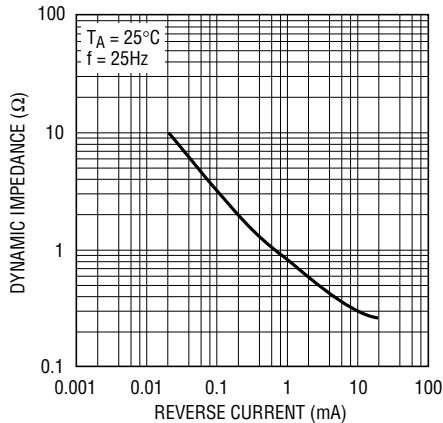


1634-5 G04

Dynamic Impedance vs Frequency

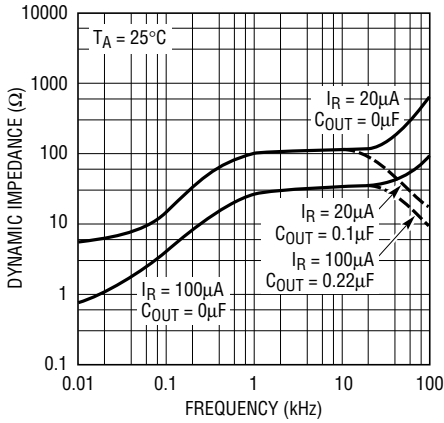


1634-5 G05

Forward Characteristics

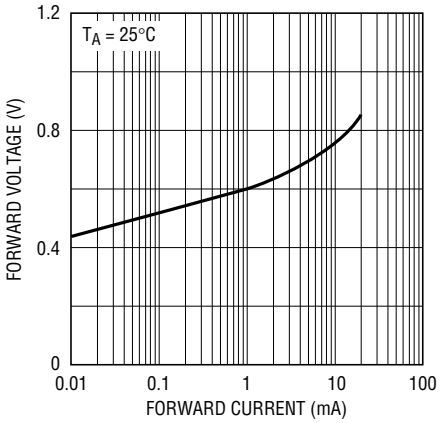


1634-2.5 G06

0.1Hz to 10Hz Noise

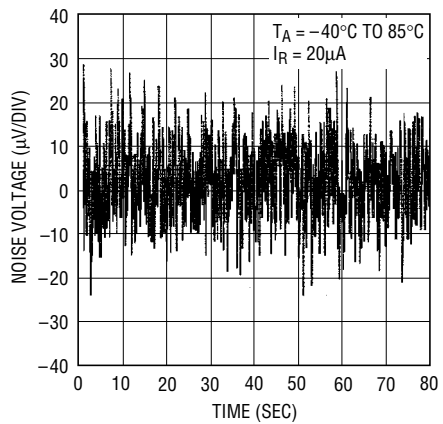


1634-5 G06

Response Time

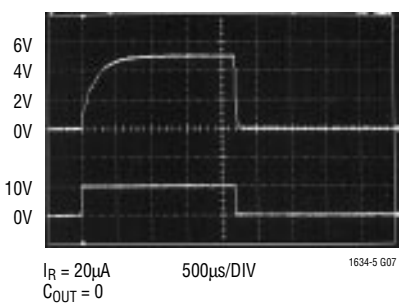

1634-5 G07

Response Time

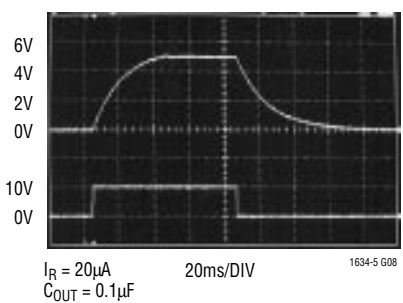

1634-5 G08

## APPLICATIONS INFORMATION

The reverse characteristics of the LT1634 behave like a resistor in parallel with a Zener diode. This simple, well behaved characteristic is important to the proper operation of circuits like Figure 1. The adjustable output voltage

reference depends upon positive feedback from the LT1495's output to start-up and regulate the bias current for the LT1634.


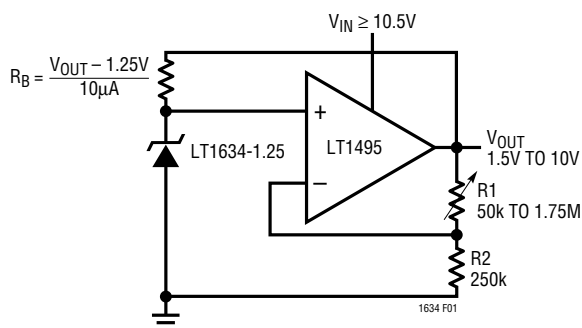



Figure 1. Adjustable Output Voltage Reference

## TYPICAL APPLICATIONS

### Reference for Micropower A/D Converter

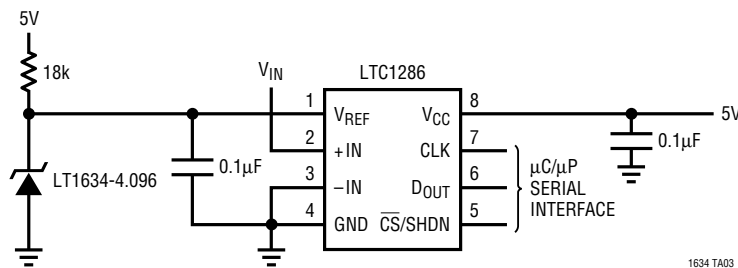


### The LT1634-5 Generates the LTC1448 Dual 12-Bit DAC's Reference and Supply Voltage

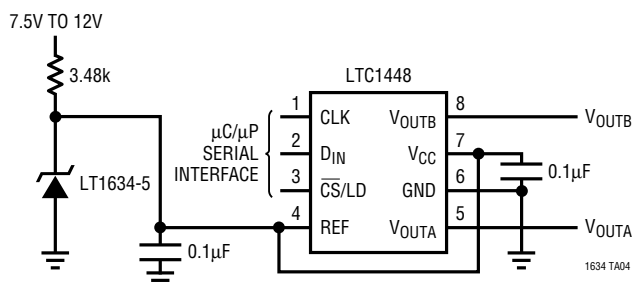

**PACKAGE DESCRIPTION**

Dimensions in inches (millimeters) unless otherwise noted.


**MS8 Package**  
**8-Lead Plastic MSOP**  
 (LTC DWG # 05-08-1660)

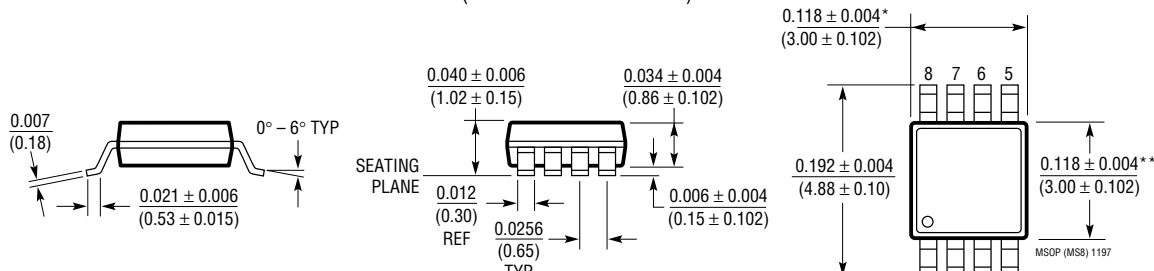

\* DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED  $0.006^*$  (0.152mm) PER SIDE

\*\* DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED  $0.006^*$  (0.152mm) PER SIDE


**S8 Package**  
**8-Lead Plastic Small Outline (Narrow 0.150)**  
 (LTC DWG # 05-08-1610)

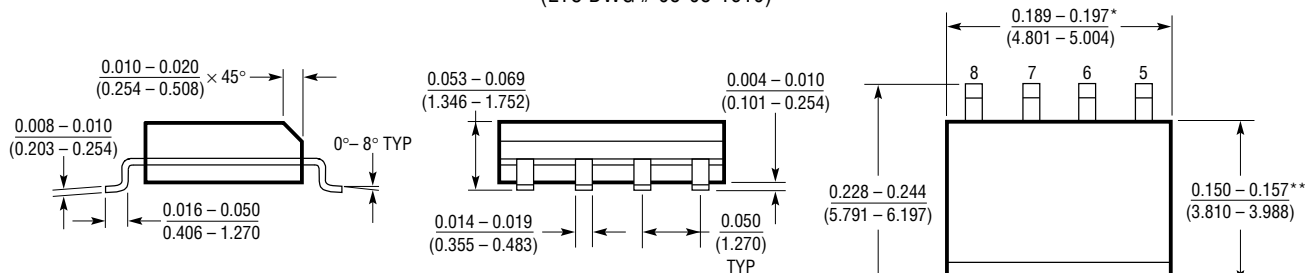

\* DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED  $0.006^*$  (0.152mm) PER SIDE


\*\* DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED  $0.010^*$  (0.254mm) PER SIDE

**Z Package**  
**3-Lead Plastic TO-92 (Similar to TO-226)**  
 (LTC DWG # 05-08-1410)

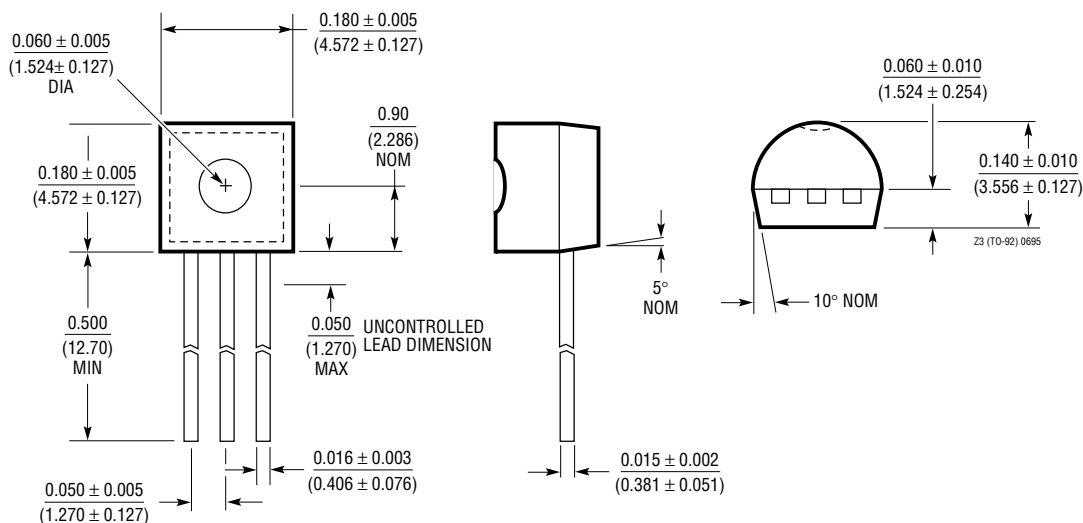


TYPICAL APPLICATIONS

Single Cell Li-Ion Battery Supervisory Circuit (I<sub>Q</sub> = 20μA)

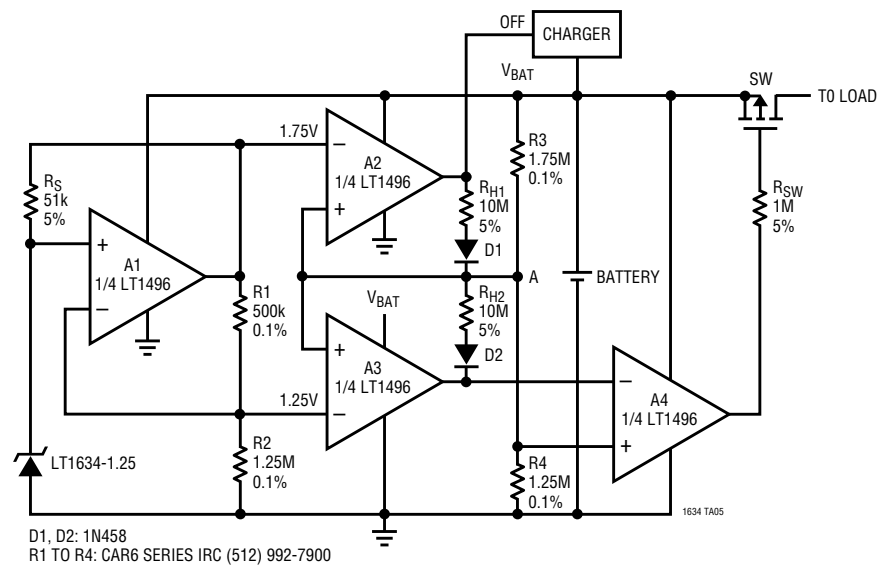

Micropower Voltage and Current Reference

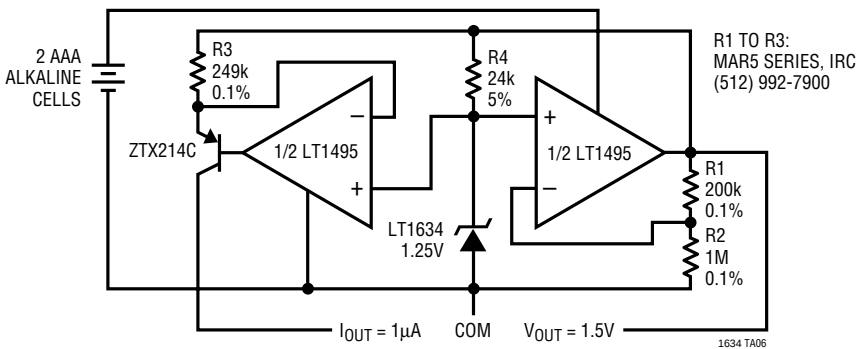

RELATED PARTS

| PART NUMBER | DESCRIPTION                              | COMMENTS                                                                                               |
|-------------|------------------------------------------|--------------------------------------------------------------------------------------------------------|
| LTC1440     | Micropower Comparator with Reference     | 3.7μA Max Supply Current, 1% 1.182V Reference, MSOP, PDIP and SO-8 Packages                            |
| LT1460      | Micropower Series Reference              | 0.075% Max, 10ppm/°C Max Drift, 2.5V, 5V and 10V Versions, MSOP, PDIP, SO-8, SOT-23 and TO-92 Packages |
| LT1495      | 1.5μA Precision Rail-to-Rail Dual Op Amp | 1.5μA Max Supply Current, 100pA Max I <sub>OS</sub>                                                    |
| LTC1540     | Nanopower Comparator with Reference      | 600nA Max Supply Current, 2% 1.182V Reference, MSOP and SO-8 Packages                                  |