


NOTES:
1. MATERIALS AND FINISHES:
1.0/2.3 PLUG:
BODY - BRASS, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
BNC PLUG:
BODY - PHOSPHOR BRONZE, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
CABLE - RG-179
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 95-850-201-XXX, AND DATE CODE"

THIRD ANGLE PROJ.



REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	01-Oct-18	09290	SV

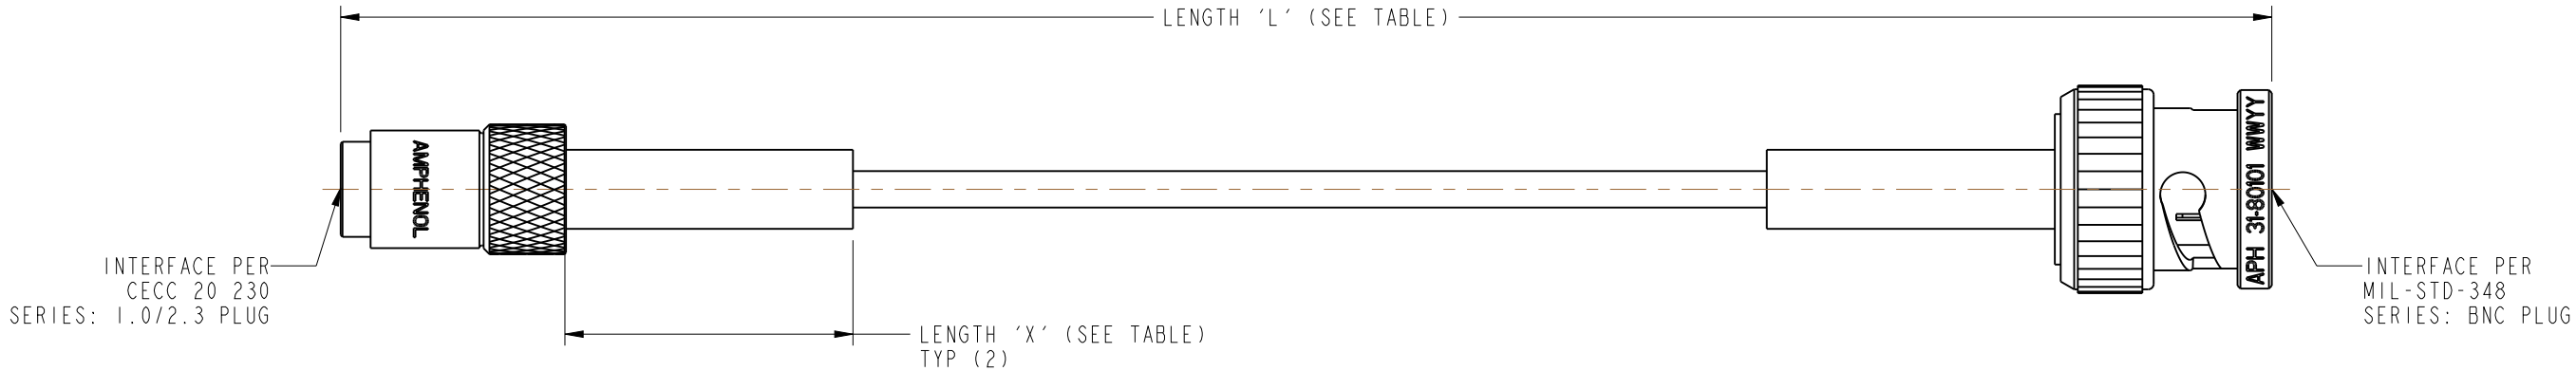

DESIGN REQUIREMENTS

☒ FREQUENCY: DC TO 4 GHz	☒ CONTINUITY
☐ VSWR: ---- :1 MAX	☒ HI-POT: 250 VRMS
☐ INS. LOSS: ---- dB MAX	☐ OTHER

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ± 0.3mm ANGLES ±1°	MATERIAL SEE NOTES	DRAWN S.VO	DATE 22-May-18	TITLE 1.0/2.3 CRIMP PLUG TO BNC PLUG USING RG-179 CABLE, VARIOUS LENGTHS	Amphenol RF www.amphenolrf.com	
	REFERENCE EAR# 8193 REF: ---	ENGINEER S.VO	DATE 22-May-18			
	CONFIGURATION LEVEL: In Work	APPROVED ---	DATE ---		DRAWING NO. 95-850-201-XXX	
	FINISH	CAD FILE		SCALE: 2.0:1.0	SHEET 3 OF 4	ITEM NO. 95-850-201-XXX
				DWG SIZE B	REV A	PART NO. 95-850-201-XXX

THIRD ANGLE PROJ. 				REVISIONS																																																																																																																	
REV		DESCRIPTION			DATE		ECN	APPR																																																																																																													
A		RELEASE TO MFG.			01-Oct-18		09290	SV																																																																																																													
<table><tr><td>95-850-201-240</td><td></td><td>240.00 [6.096]</td><td rowspan="24">1.50 [0.038]</td></tr><tr><td>95-850-201-216</td><td></td><td>216.00 [5.486]</td></tr><tr><td>-</td><td>95-850-201M500</td><td>196.85 [5.000]</td></tr><tr><td>95-850-201-192</td><td></td><td>192.00 [4.877]</td></tr><tr><td>95-850-201-180</td><td></td><td>180.00 [4.572]</td></tr><tr><td>95-850-201-168</td><td></td><td>168.00 [4.267]</td></tr><tr><td>-</td><td>95-850-201M400</td><td>157.48 [4.000]</td></tr><tr><td>95-850-201-144</td><td></td><td>144.00 [3.658]</td></tr><tr><td>95-850-201-120</td><td></td><td>120.00 [3.048]</td></tr><tr><td>-</td><td>95-850-201M300</td><td>118.11 [3.000]</td></tr><tr><td>95-850-201-108</td><td></td><td>108.00 [2.743]</td></tr><tr><td>95-850-201-096</td><td></td><td>96.00 [2.438]</td></tr><tr><td>95-850-201-084</td><td></td><td>84.00 [2.134]</td></tr><tr><td>-</td><td>95-850-201M200</td><td>78.74 [2.000]</td></tr><tr><td>95-850-201-072</td><td></td><td>72.00 [1.829]</td></tr><tr><td>95-850-201-060</td><td></td><td>60.00 [1.524]</td></tr><tr><td>-</td><td>95-850-201M150</td><td>59.06 [1.500]</td></tr><tr><td>-</td><td>95-850-201M125</td><td>49.21 [1.250]</td></tr><tr><td>95-850-201-048</td><td></td><td>48.00 [1.219]</td></tr><tr><td>-</td><td>95-850-201M100</td><td>39.37 [1.000]</td></tr><tr><td>95-850-201-036</td><td></td><td>36.00 [0.914]</td></tr><tr><td>-</td><td>95-850-201M075</td><td>29.53 [0.750]</td></tr><tr><td>95-850-201-024</td><td></td><td>24.00 [0.610]</td></tr><tr><td>-</td><td>95-850-201M050</td><td>19.69 [0.500]</td></tr><tr><td>95-850-201-018</td><td></td><td>18.00 [0.457]</td><td rowspan="7">0.75 [0.019]</td></tr><tr><td>95-850-201-012</td><td></td><td>12.00 [0.305]</td></tr><tr><td>-</td><td>95-850-201M030</td><td>11.81 [0.300]</td></tr><tr><td>-</td><td>95-850-201M025</td><td>9.84 [0.250]</td></tr><tr><td>-</td><td>95-850-201M020</td><td>7.87 [0.200]</td></tr><tr><td>95-850-201-006</td><td></td><td>6.00 [0.152]</td></tr><tr><td>-</td><td>95-850-201M015</td><td>5.91 [0.150]</td></tr><tr><td>PART NUMBER (IMPERIAL)</td><td>PART NUMBER (METRIC)</td><td>LENGTH AND TOLERANCE 'L' IN INCHES [METERS]</td><td>LENGTH 'X' IN INCHES [METERS] MIN</td></tr></table>				95-850-201-240		240.00 [6.096]	1.50 [0.038]	95-850-201-216		216.00 [5.486]	-	95-850-201M500	196.85 [5.000]	95-850-201-192		192.00 [4.877]	95-850-201-180		180.00 [4.572]	95-850-201-168		168.00 [4.267]	-	95-850-201M400	157.48 [4.000]	95-850-201-144		144.00 [3.658]	95-850-201-120		120.00 [3.048]	-	95-850-201M300	118.11 [3.000]	95-850-201-108		108.00 [2.743]	95-850-201-096		96.00 [2.438]	95-850-201-084		84.00 [2.134]	-	95-850-201M200	78.74 [2.000]	95-850-201-072		72.00 [1.829]	95-850-201-060		60.00 [1.524]	-	95-850-201M150	59.06 [1.500]	-	95-850-201M125	49.21 [1.250]	95-850-201-048		48.00 [1.219]	-	95-850-201M100	39.37 [1.000]	95-850-201-036		36.00 [0.914]	-	95-850-201M075	29.53 [0.750]	95-850-201-024		24.00 [0.610]	-	95-850-201M050	19.69 [0.500]	95-850-201-018		18.00 [0.457]	0.75 [0.019]	95-850-201-012		12.00 [0.305]	-	95-850-201M030	11.81 [0.300]	-	95-850-201M025	9.84 [0.250]	-	95-850-201M020	7.87 [0.200]	95-850-201-006		6.00 [0.152]	-	95-850-201M015	5.91 [0.150]	PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH AND TOLERANCE 'L' IN INCHES [METERS]	LENGTH 'X' IN INCHES [METERS] MIN	<table><tr><td>5.0' - 24.9' [1.524 - 7.617]</td><td>±2.5%</td></tr><tr><td>24.00" - 59.00" [0.610 - 1.499]</td><td>±0.50" [0.013]</td></tr><tr><td>0" - 23.90" [0 - 0.607]</td><td>±0.25" [0.006]</td></tr><tr><td>LENGTH IN INCHES/FT [METERS]</td><td>TOLERANCE</td></tr><tr><td colspan="2">TOLERANCE TABLE</td></tr></table>					5.0' - 24.9' [1.524 - 7.617]	±2.5%	24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]	0" - 23.90" [0 - 0.607]	±0.25" [0.006]	LENGTH IN INCHES/FT [METERS]	TOLERANCE	TOLERANCE TABLE	
95-850-201-240		240.00 [6.096]	1.50 [0.038]																																																																																																																		
95-850-201-216		216.00 [5.486]																																																																																																																			
-	95-850-201M500	196.85 [5.000]																																																																																																																			
95-850-201-192		192.00 [4.877]																																																																																																																			
95-850-201-180		180.00 [4.572]																																																																																																																			
95-850-201-168		168.00 [4.267]																																																																																																																			
-	95-850-201M400	157.48 [4.000]																																																																																																																			
95-850-201-144		144.00 [3.658]																																																																																																																			
95-850-201-120		120.00 [3.048]																																																																																																																			
-	95-850-201M300	118.11 [3.000]																																																																																																																			
95-850-201-108		108.00 [2.743]																																																																																																																			
95-850-201-096		96.00 [2.438]																																																																																																																			
95-850-201-084		84.00 [2.134]																																																																																																																			
-	95-850-201M200	78.74 [2.000]																																																																																																																			
95-850-201-072		72.00 [1.829]																																																																																																																			
95-850-201-060		60.00 [1.524]																																																																																																																			
-	95-850-201M150	59.06 [1.500]																																																																																																																			
-	95-850-201M125	49.21 [1.250]																																																																																																																			
95-850-201-048		48.00 [1.219]																																																																																																																			
-	95-850-201M100	39.37 [1.000]																																																																																																																			
95-850-201-036		36.00 [0.914]																																																																																																																			
-	95-850-201M075	29.53 [0.750]																																																																																																																			
95-850-201-024		24.00 [0.610]																																																																																																																			
-	95-850-201M050	19.69 [0.500]																																																																																																																			
95-850-201-018		18.00 [0.457]	0.75 [0.019]																																																																																																																		
95-850-201-012		12.00 [0.305]																																																																																																																			
-	95-850-201M030	11.81 [0.300]																																																																																																																			
-	95-850-201M025	9.84 [0.250]																																																																																																																			
-	95-850-201M020	7.87 [0.200]																																																																																																																			
95-850-201-006		6.00 [0.152]																																																																																																																			
-	95-850-201M015	5.91 [0.150]																																																																																																																			
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH AND TOLERANCE 'L' IN INCHES [METERS]	LENGTH 'X' IN INCHES [METERS] MIN																																																																																																																		
5.0' - 24.9' [1.524 - 7.617]	±2.5%																																																																																																																				
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]																																																																																																																				
0" - 23.90" [0 - 0.607]	±0.25" [0.006]																																																																																																																				
LENGTH IN INCHES/FT [METERS]	TOLERANCE																																																																																																																				
TOLERANCE TABLE																																																																																																																					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°				MATERIAL		DRAWN DATE S.VO 25-Sep-18		TITLE 1.0/2.3 CRIMP PLUG TO BNC PLUG USING RG-179 CABLE, VARIOUS LENGTHS		Amphenol RF www.amphenolrf.com																																																																																																											
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.				REFERENCE		ENGINEER DATE S.VO 25-Sep-18																																																																																																															
				EAR# 8193		APPROVED DATE --- ---																																																																																																															
				REF: ---		---																																																																																																															
CONFIGURATION LEVEL: In Work				CAD FILE		DWG SIZE		REV		DRAWING NO. 95-850-201-XXX																																																																																																											
						B		A			ITEM NO. 95-850-201-XXX																																																																																																										
										PART NO. 95-850-201-XXX																																																																																																											