


NOTES:
1. MATERIALS AND FINISHES:
1.0/2.3 PLUG:
BODY - BRASS, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
BNC PLUG:
BODY - PHOSPHOR BRONZE, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
CABLE - RG-179
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 95-850-201-XXX, AND DATE CODE"

THIRD ANGLE PROJ.



REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	01-Oct-18	09290	SV

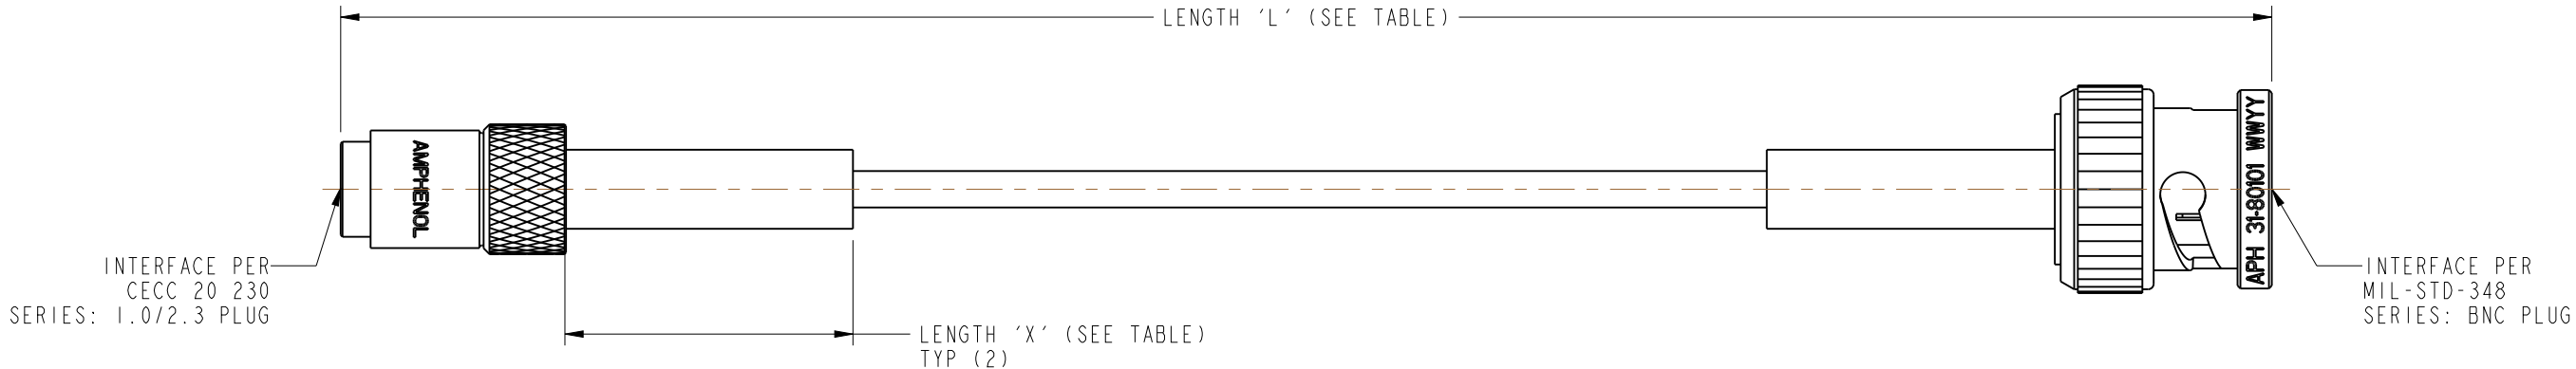

DESIGN REQUIREMENTS

- ☒ FREQUENCY: DC TO 4 GHz
- ☒ CONTINUITY
- ☐ VSWR: ---- :1 MAX
- ☒ HI-POT: 250 VRMS
- ☐ INS. LOSS: ---- dB MAX
- ☐ OTHER

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ± 0.3mm ANGLES ±1°	MATERIAL SEE NOTES	DRAWN S.VO	DATE 22-May-18	TITLE 1.0/2.3 CRIMP PLUG TO BNC PLUG USING RG-179 CABLE, VARIOUS LENGTHS	Amphenol RF www.amphenolrf.com	
	REFERENCE EAR# 8193 REF: ---	ENGINEER S.VO	DATE 22-May-18			
	CONFIGURATION LEVEL: In Work	APPROVED ---	DATE ---		DRAWING NO. 95-850-201-XXX	
	FINISH	CAD FILE		SCALE: 2.0:1.0	SHEET 3 OF 4	ITEM NO. 95-850-201-XXX
				DWG SIZE B	REV A	PART NO. 95-850-201-XXX

THIRD ANGLE PROJ. 			REVISIONS			
REV	DESCRIPTION		DATE	ECN	APPR	
A	RELEASE TO MFG.		01-Oct-18	09290	SV	