




4

3

2

1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
IS	-		B	Released to production	23JAN2006	RLU	DB
			C	Add. 50 Ohm ident mark, changed packaging Q.ty	17FEB2006	RLU	DB
			D	Updated min. Au thickness (note 4 was 0.2µm)	15MAR07	AN	DB
			E	Obsolete PN	19FEB2009	MS	DB

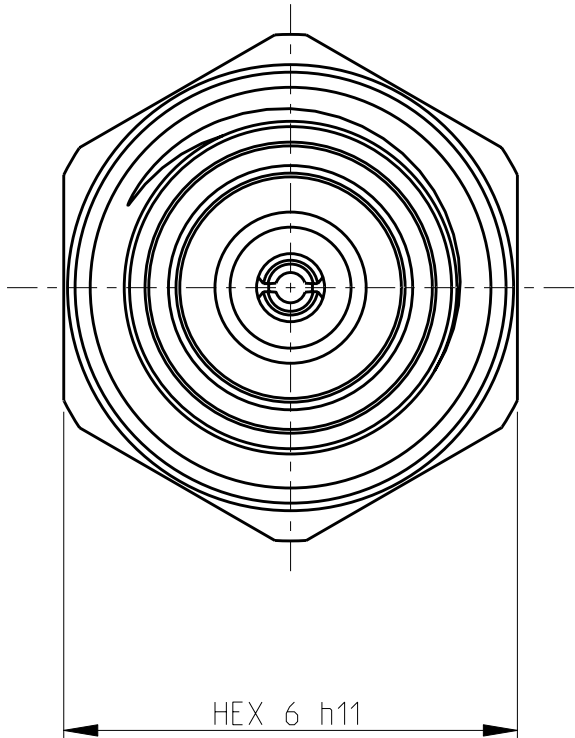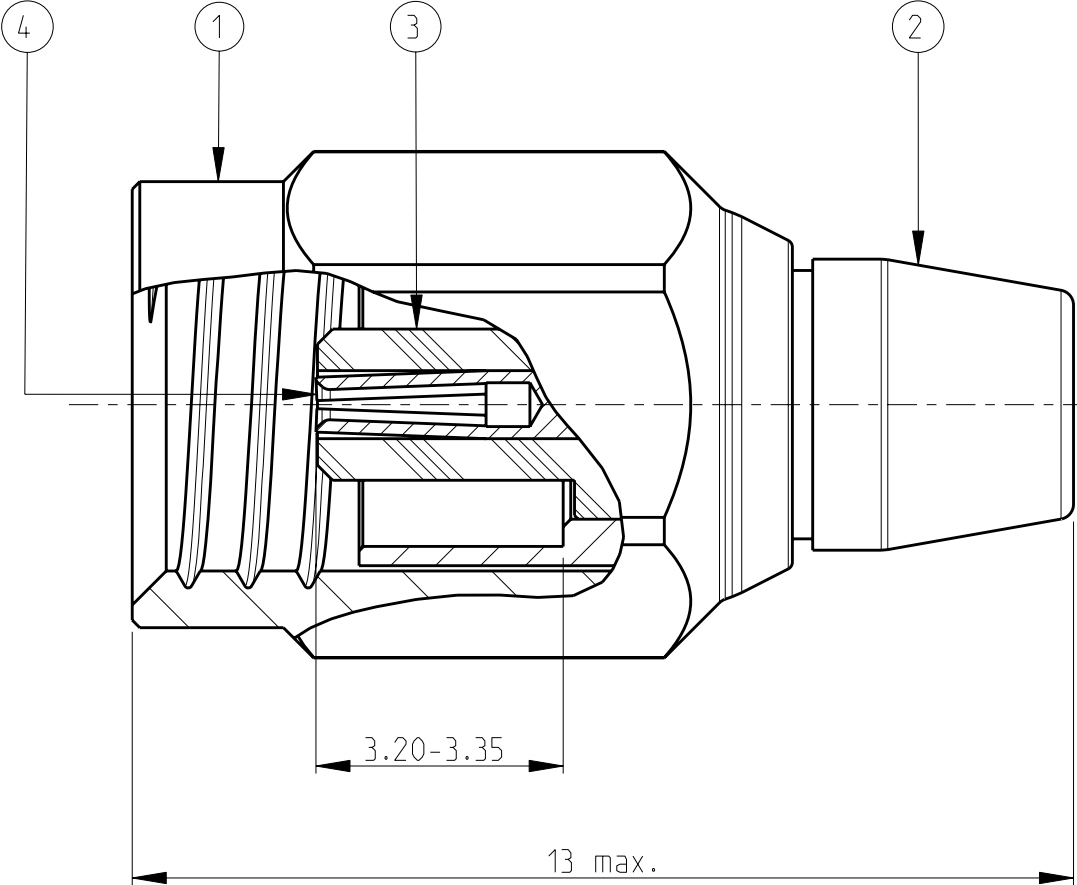

3:1

5-1460803-1	1460803-1	4	1	CENTER CONDUCTOR	Brass	min. 0.1µm Au over min 2µm NiP
		3	1	DIELECTRIC	PTFE	-
		2	1	SHELL	Brass	min. 0.1µm Au over min 2µm NiP
		1	1	COUPLING NUT	Brass	min. 0.1µm Au over min 2µm NiP
PART NR	PART NR	ITEM NR	PIECES	DESCRIPTION	MATERIAL	PLATING

1 - COAX CONNECTOR COMPLIES
WITH SPEC. CECC 22140, IEC 169-9

2 ONE PLUG PACKED IN PLASTIC BAG

3 BULK PACKAGING.

4 General Tolerances according to DIN ISO 2768-mK



1:1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN R. Luppi 28JAN2005	Tyco Electronics Switzerland - Lugano			
		CHK D. Bozzer 28JAN2005				
DIMENSIONS: mm		APVD -	NAME SMC, PLUG TERMINATOR CHARACTERISTIC IMPEDENCE 50 Ohm			
		PRODUCT SPEC 108-71067				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC -	RESTRICTED TO			
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±1°		WEIGHT 1.5 g	SIZE A3	CAGE CODE 00779	DRAWING NO C-1460803	
MATERIAL -		CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1	REV E