





1

2

3

4

5

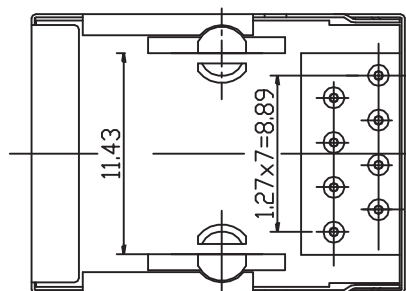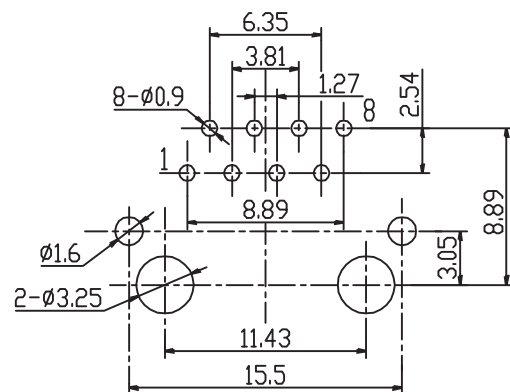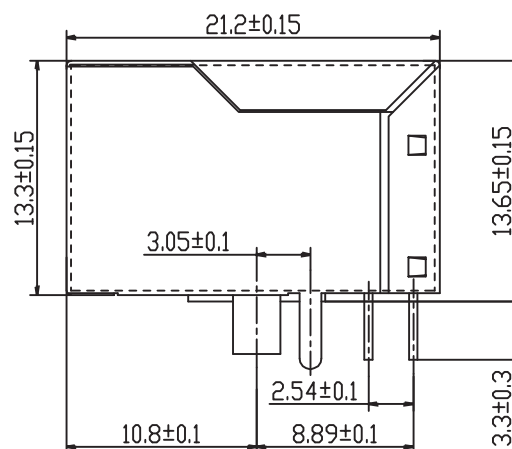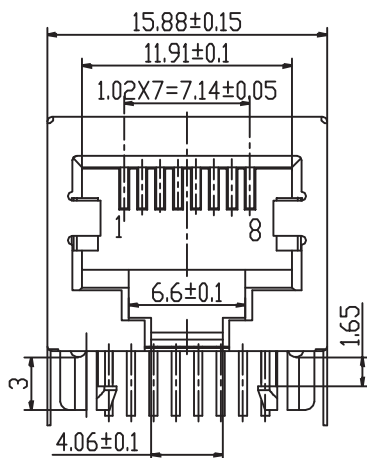

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR MATERIAL: PBT
FLAMMABILITY RATING UL94-V0
COLOUR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRONZE NI PLATED
QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL

OPERATING TEMPERATURE: -25 °C UP TO 85 °C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
CONTACT RESISTANCE: 20 mOHM MAX
SYSTEM APPLICATION: CAT 5 COMPATIBLE

STANDARD

 CERTIFIED: E324776 / MODEL NUMBER 615-HStd

SOLDERING

WAVE PROCESS ONLY


PACKAGING

TRAY

PCB LAYOUT - COMPONENT VIEW

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW:

DESCRIPTION: HORIZONTAL SHIELDED 3.05mm REAR GROUNDING POST
8P8C MODULAR JACK TAB DOWN

WERI PART NO: 615 008 142 621

SIZE

A4