



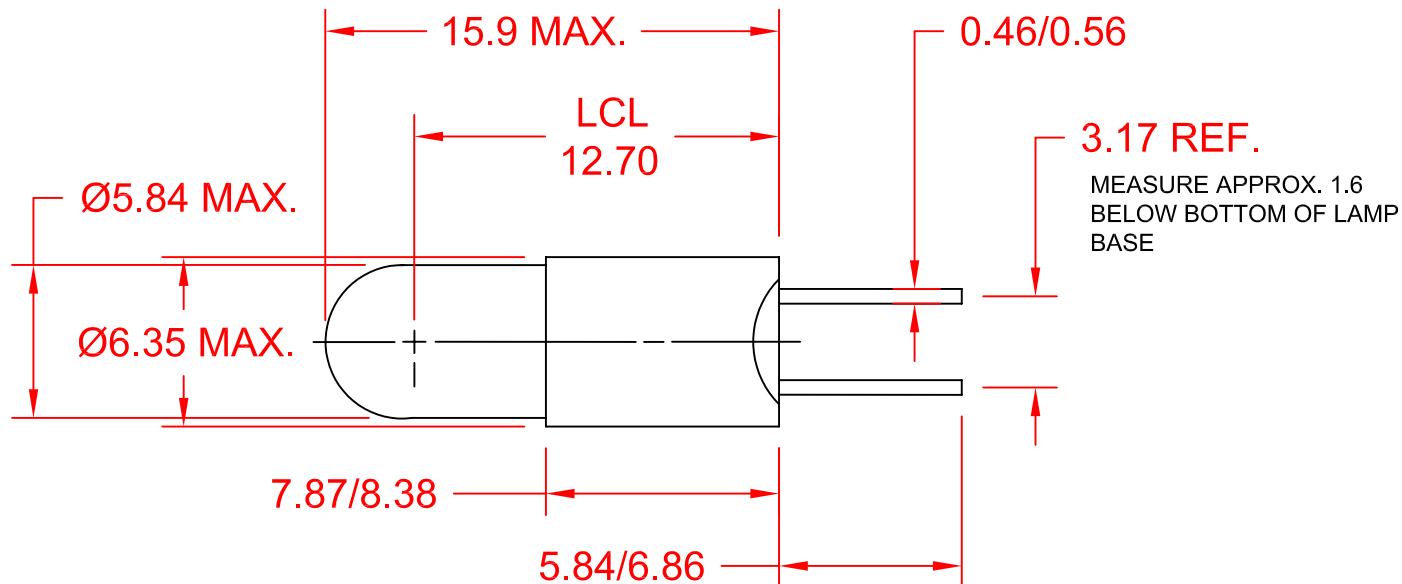

| JKL LAMP NUMBER | VOLTS RATED | AMPS ±10% | MSCP ±25% | LUMENS ±25% | AVERAGE LIFE HRS. | FILAMENT TYPE |
|-----------------|-------------|-----------|-----------|-------------|-------------------|---------------|
| 7868            | 2.5         | .350      | .200      | 2.51        | 20,000            | C-2R          |
| 7838            | 2.7         | .060      | .040      | 0.50        | 6,000             | C-2R          |
| 7375            | 3.0         | .015      | .003      | 0.04        | 10,000            | C-6           |
| 7361            | 5.0         | .060      | .050      | 0.63        | 100,000           | C-2R          |
| 3149            | 5.0         | .060      | .150      | 1.89        | 5,000             | C-2R          |
| 7362            | 5.0         | .115      | .150      | 1.89        | 40,000            | C-2R          |
| 7945            | 6.0         | .040      | .030      | 0.38        | 10,000            | C-2V          |
| 7328            | 6.0         | .200      | .630      | 7.92        | 1,000             | C-2R          |
| 7380            | 6.3         | .040      | .030      | 0.38        | 20,000            | C-2F          |
| 7377            | 6.3         | .075      | .230      | 2.89        | 1,000             | C-2R          |
| 7368            | 6.3         | .150      | .450      | 5.66        | 3,000             | C-2R          |
| 7381            | 6.3         | .200      | .400      | 5.03        | 50,000            | C-2F          |
| 7349            | 6.3         | .200      | .550      | 6.91        | 5,000             | C-2R          |
| 7344            | 10.0        | .014      | .004      | 0.05        | 50,000            | C-2F          |
| 7367            | 10.0        | .040      | .080      | 1.01        | 30,000            | C-2F          |
| 7371            | 12.0        | .040      | .120      | 1.51        | 10,000            | C-2F          |
| 7382            | 14.0        | .080      | .300      | 3.77        | 50,000            | C-2F          |
| 7330            | 14.0        | .080      | .500      | 6.29        | 2,500             | C-2F          |
| 7373            | 14.0        | .100      | .500      | 6.29        | 50,000            | C-2F          |
| FB33            | 14.0        | .125      | .700      | 8.80        | 4,000             | C-2F          |
| 7370            | 18.0        | .040      | .150      | 1.89        | 10,000            | C-2F          |
| 7001            | 24.0        | .050      | .500      | 6.29        | 2,000             | C-2F          |
| 7374            | 28.0        | .040      | .200      | 2.51        | 50,000            | C-2F          |
| 7387            | 28.0        | .040      | .300      | 3.77        | 25,000            | C-2F          |
| 7327            | 28.0        | .040      | .340      | 4.27        | 4,000             | C-2F          |
| 7876            | 28.0        | .060      | .340      | 4.27        | 25,000            | C-2F          |
| 7376            | 28.0        | .065      | .650      | 8.17        | 5,000             | C-2F          |
| FB32            | 32.0        | .040      | .300      | 3.77        | 10,000            | C-2F          |



DIMENSIONS ARE IN MILLIMETERS  
TOLERANCE UNLESS OTHERWISE SPECIFIED  
1 PL +/-  
2 PL +/-  
ANGLE +/-

**JKL**

COMPONENTS CORPORATION

TITLE

T-1 3/4 STANDARD BI-PIN BASED LAMPS

|          |                                    |            |
|----------|------------------------------------|------------|
| REV. NO. | DESCRIPTION/ECO NUMBER             | APPVD DATE |
| B        | DIMENSION CHANGES                  | 6/5/08     |
| A        | DELETE CANCELLED PART NO. 7459     | 7/21/05    |
|          | RELEASED - CANCEL SM-STDBP-T 1 3/4 | 2/24/00    |

DRAWN BY L. WENGSTROM  
APPVD BY L.R.  
DATE 6/5/08  
- CAD DRAWING -  
MANUAL REVISIONS NOT PERMITTED

SIZE A  
SCALE NONE

FSCM NO. 55335

DRAWING NO. BI-PIN T-1 3/4

RELEASED DATE 2/24/00

REVISION DATE 6/5/08

REV. NO. B

SHEET 1 OF 1