

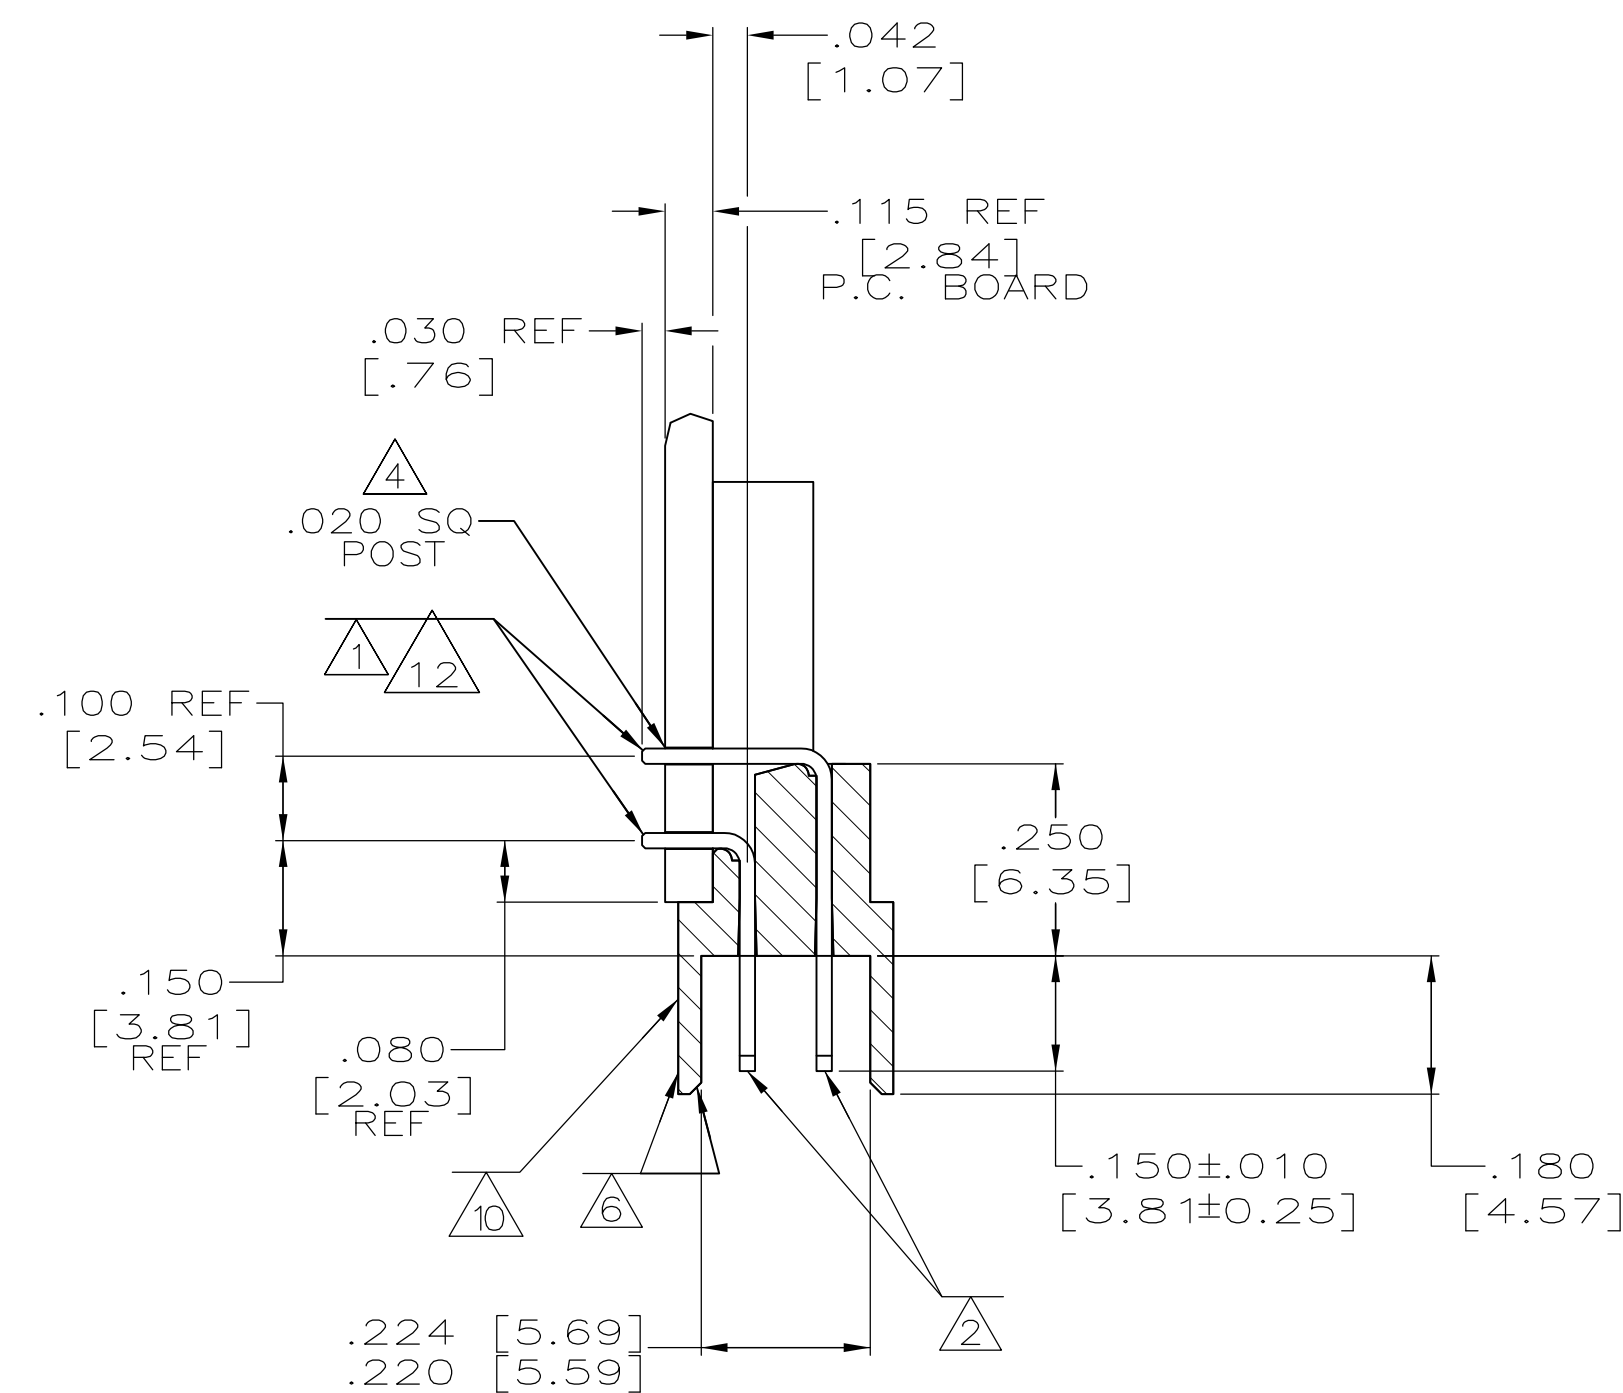




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DMN	APVD
			G	REV PER ECO-11-024750	20DEC11	PY	DE



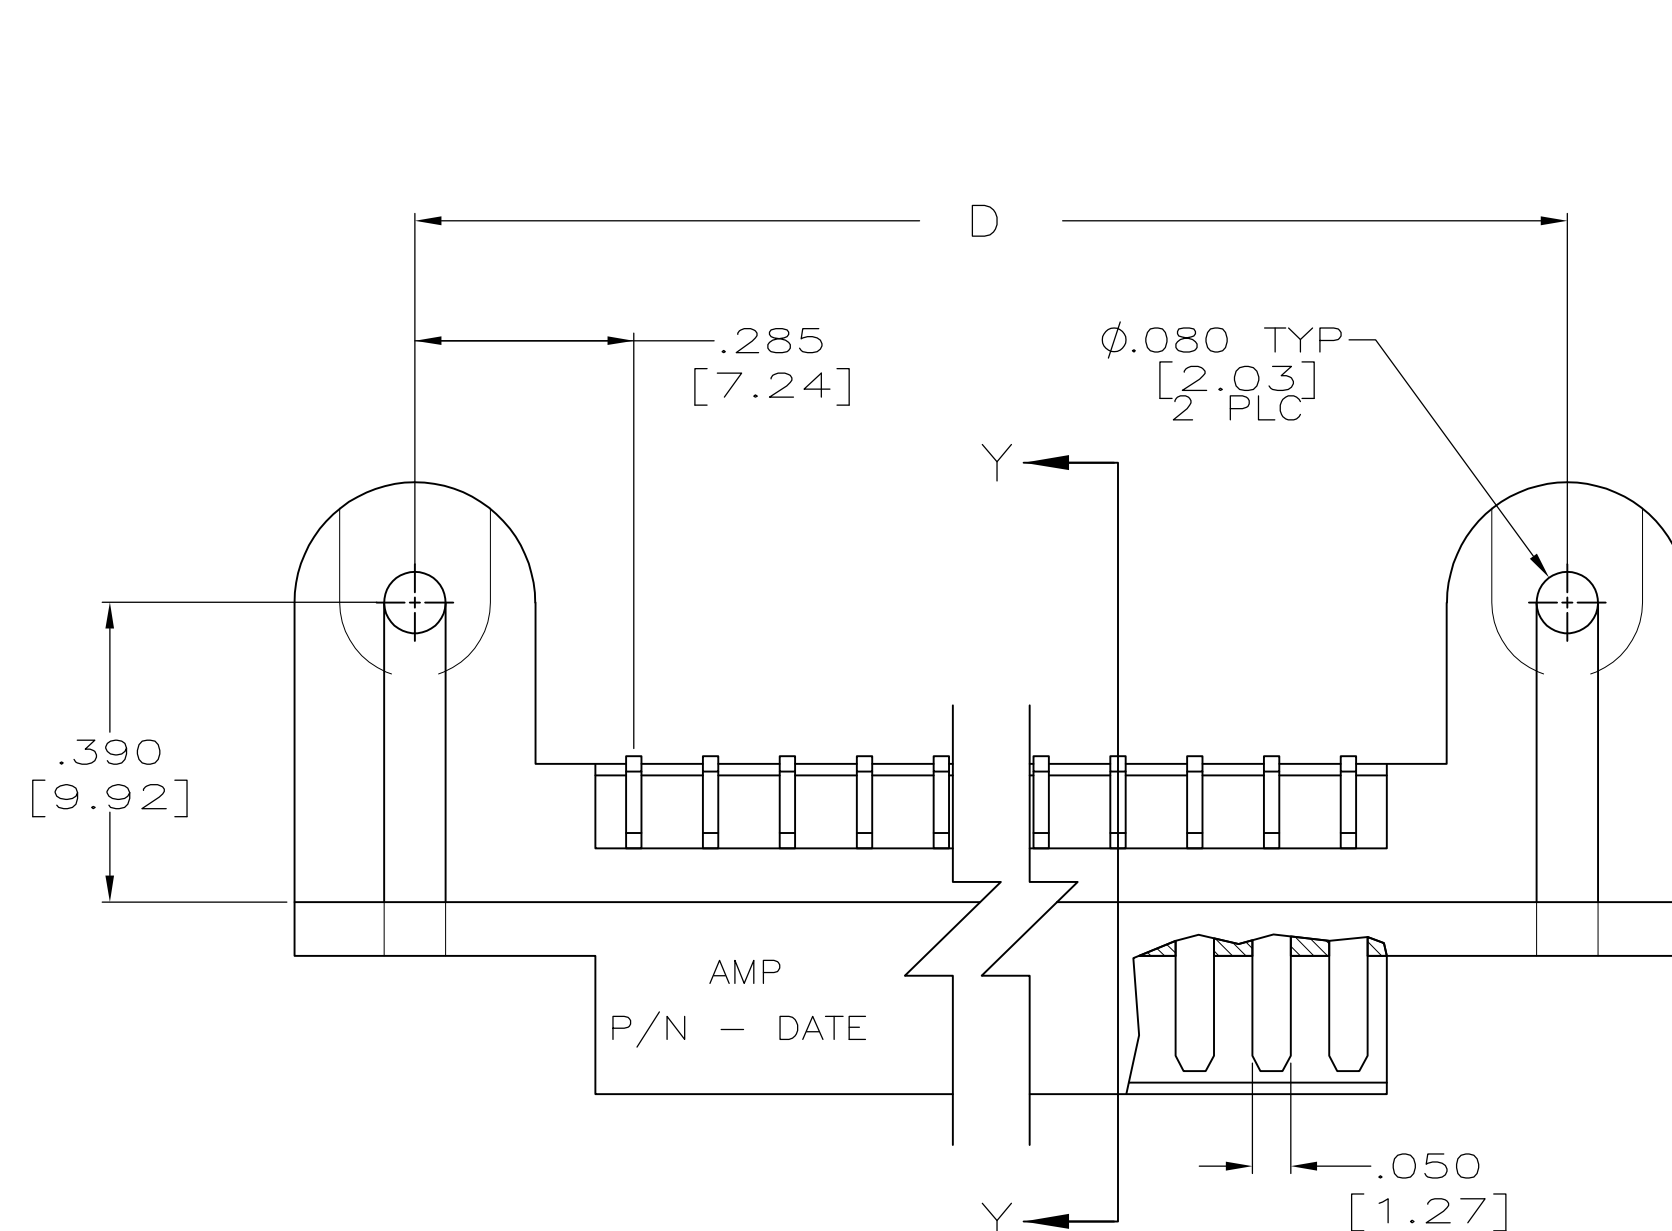


SECTION Y—Y

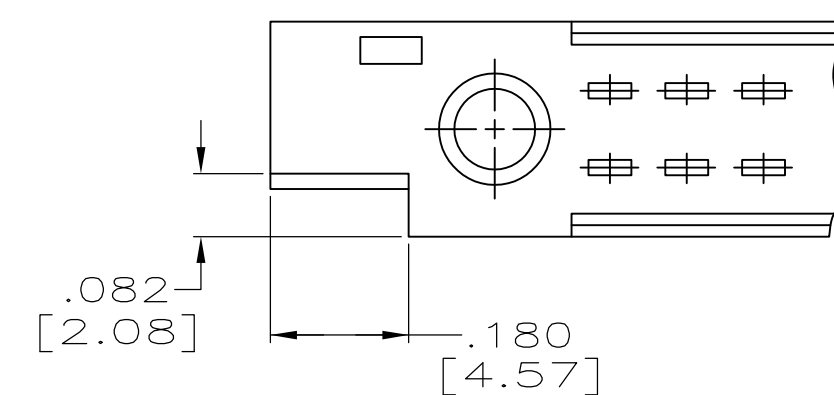

DETAIL A

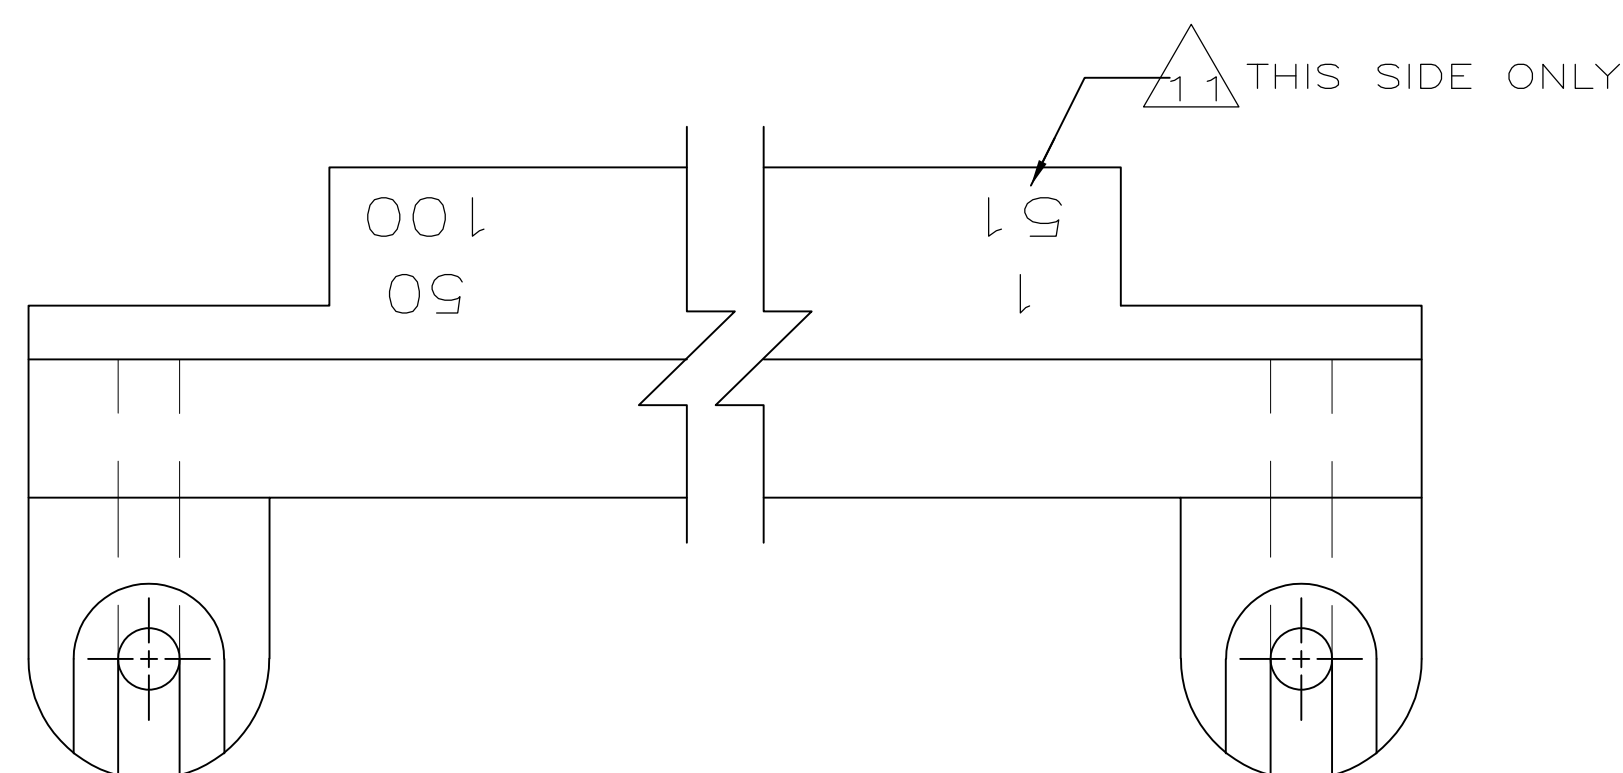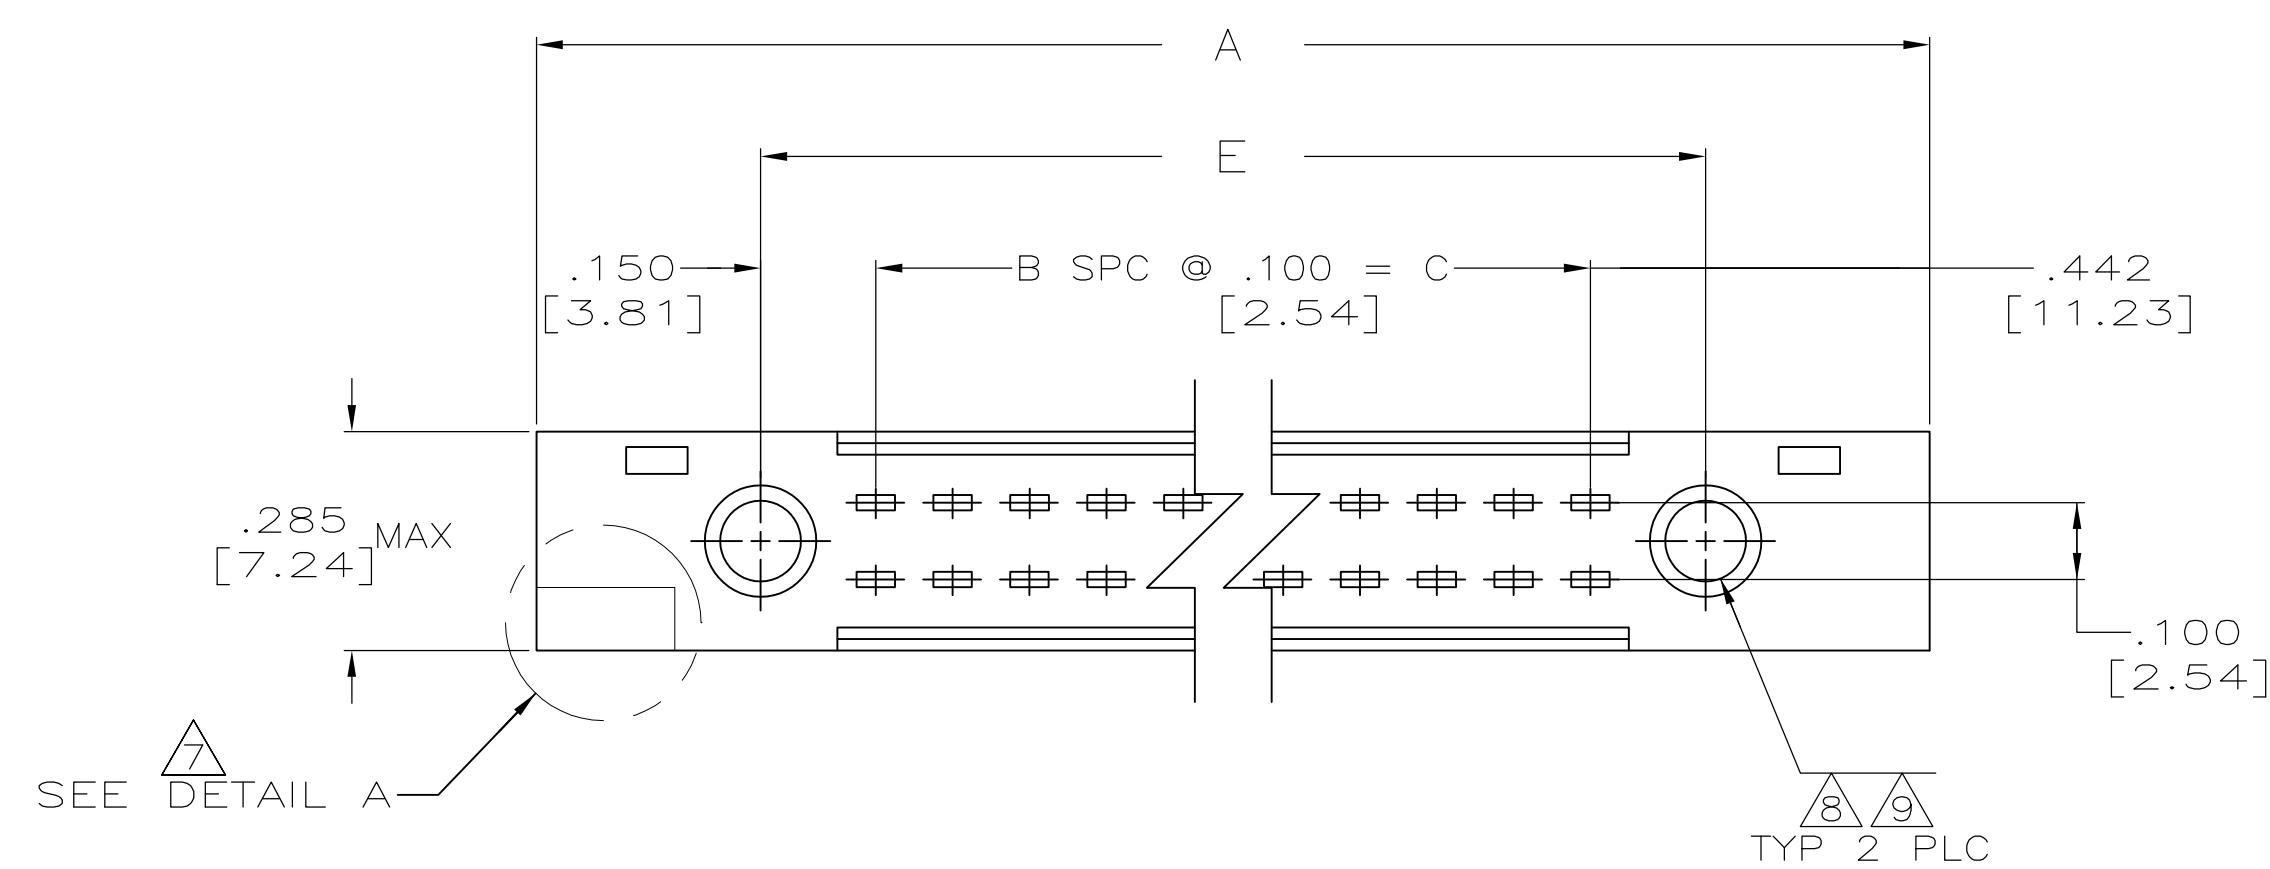

OBSOLETE	41	40		4.200 [106.68]	4.470 [113.54]	3.900 [99.06]	39	4.784 [121.51]	40	228235-6
	51	50		5.200 [132.08]	5.470 [138.94]	4.900 [124.46]	49	5.784 [146.91]	50	228235-5
OBSOLETE	1	55	 	5.700 [144.78]	5.970 [151.64]	5.400 [137.16]	54	6.284 [159.61]	55	228235-4
	41	40	 	4.200 [106.68]	4.470 [113.54]	3.900 [99.06]	39	4.784 [121.51]	40	228235-3
OBSOLETE	51	50	 	5.200 [132.08]	5.470 [138.94]	4.900 [124.46]	49	5.784 [146.91]	50	228235-2
OBSOLETE	31	30	 	3.200 [81.28]	3.470 [88.14]	2.900 [73.66]	29	3.784 [96.11]	30	228235-1
		IDENT NUMBERS	PLATING	E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN P. YEAGER		13APR2009		 TE Connectivity	
DIMENSIONS:		DWG J. WEAVER		14APR09			
INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		ECONOMATE II CONNECTOR ASSY BLADE, HEADER, .100 X .100	
		0 PLC ± - 2 PLC ± - 3 PLC ± .008 [0.20] 4 PLC ± - ANGLES ± 1°		APVD J. WEAVER PRODUCT SPEC - APPLICATION SPEC - -			
MATERIAL		FINISH		WEIGHT		RESTRICTED TO	
				SIZE A1		CAGE CODE 00779	
				DRAWING NO C=228235		SCALE 2:1	
				CUSTOMER DRAWING		SHEET 1 of 1 REV C	