



Bestückungsplan / contact layout

■ bestückt / assembled

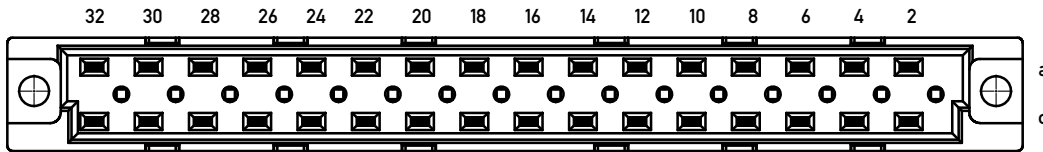

Leiterplatten-Lochbild Vorschlag / PCB drillhole pattern proposal

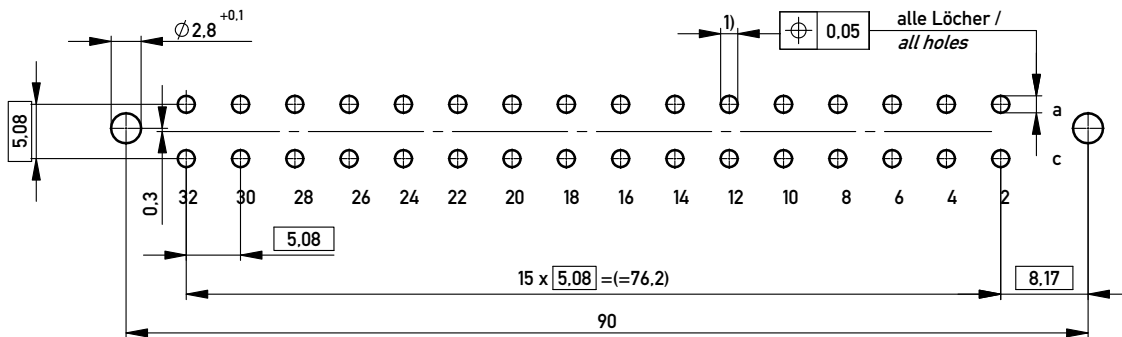

Elastische Einpresszone / compliant pressfit zone
 Isolierwerkstoff / housing material: PBT GF30
 Bauart 7 / type 7
 Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles
 Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr. 10
 diameter of drilled hole see drawing 164062 / No. 10
 1) $\phi 1,6$ $\pm 0,09$ $\pm 0,06$ Durchmesser des metallisierten Loches
 $\phi 1,6$ $\pm 0,09$ $\pm 0,06$ Diameter of finished plated-through hole

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm		Designation	
		Subject to modification without prior notice. Drawing will not be updated.		Federleiste D 32 EE Fem. Connector D 32 Pressfit	
		www.ERNI.com		354442 I A3	
c	23.04.2013			Class	
Index	Date			STVD	

Copyright by ERNI GmbH. Proprietary notice pursuant to ISO 9006 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[354442](#)