


NEW!

Planar Transformer

For Maxim MAX17599
PWM Controller

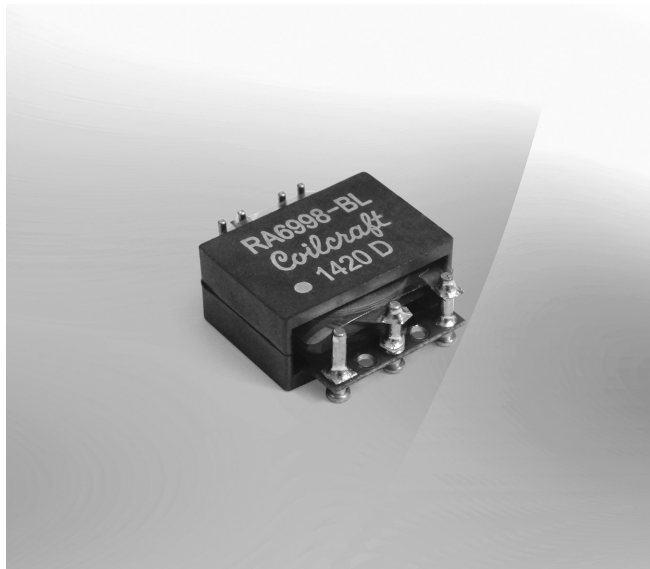

- Forward mode transformer for the Maxim MAX17599 Active Clamp Current-Mode PWM Controller
- 18 – 36 V input; 12 V, 3.3 A output
- 1500 Vrms, one minute isolation from primary to secondary and gate windings
- Specified on reference design MAXREFDES41#

Core material Ferrite

Terminations Matte tin over nickel over brass.

Weight 10.6 g

Ambient temperature –40°C to +85°C

Storage temperature Component: –40°C to +85°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 200/13" reel Plastic tape: 44 mm wide, 0.37 mm thick, 32 mm pocket spacing, 9.35 mm pocket depth

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf

Part number ¹	Inductance at 0 A ² ±20% (μH)	DCR max (mOhms)			Leakage inductance max (μH)	Turns ratio		Output ³
		pri	sec	gate		pri : sec	pri : gate	
RA6998-BL_	80	15.0	22.0	45.0	0.35	1:1.125	1:0.375	12 V, 3.3 A

1. When ordering, please specify a **packaging** code:

RA6998-BLD

Packaging: D = 13" machine ready reel. EIA-481 embossed plastic tape (200 parts per full reel).





B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

2. Inductance is measured at 250 kHz, 0.1 Vrms.

3. Output is for the secondary winding. Output of the gate winding is 4 V, 0.25 A

4. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

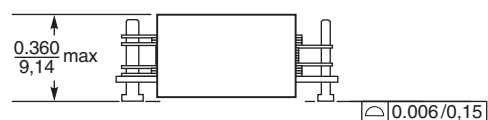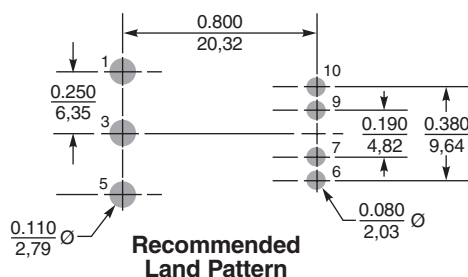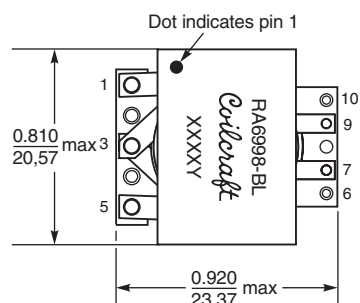

Dimensions are in $\frac{\text{inches}}{\text{mm}}$