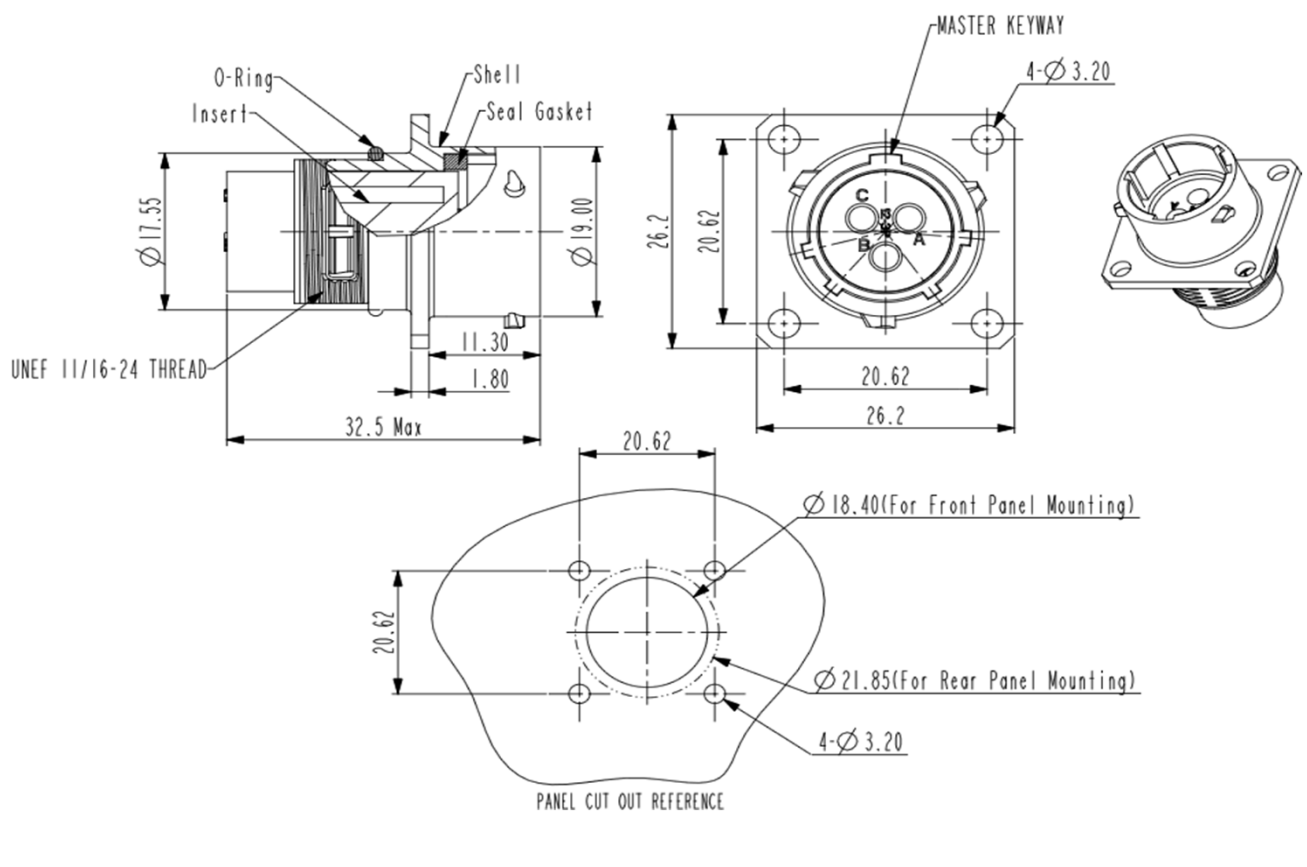


CONFIGURATION		PART NUMBER
Male Receptacle, 3 Pin, 16 Awg, Shell 12		RT00123PNH
DIMENSIONS		
 The technical drawing includes three views of the connector: a side view, a front view, and a panel cutout reference view. The side view shows the O-Ring, Insert, Shell, and Seal Gasket. Dimensions include a total length of 32.5 Max, a shell thickness of 1.80, and a shell diameter of 19.00. The front view shows a square flange with a 20.62 mm side length and 4 mounting holes with a diameter of 3.20 mm. The panel cutout reference view shows a circular cutout with a diameter of 18.40 mm for front panel mounting and 21.85 mm for rear panel mounting, with a 20.62 mm square flange and 4 mounting holes with a diameter of 3.20 mm. A master keyway is also indicated.		
TECHNICAL DATA		
TEMPERATURE RANGE:	-40°C to + 105°C	
PROTECTION:	IP67 in mated condition and in combination with sealed backshell	
VOLTAGE RATING:	250V	
HOUSING BODY:	Zinc Alloy, Nickel Plated	
COUPLING NUT:	-	
INSERT:	Glass-filled Thermoplastic UL94-V0	
SEAL:	NBR	
CURRENT:	13A	
CONTACT SIZE:	16Awg	
APPROVALS:	UL ECBT2	