


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

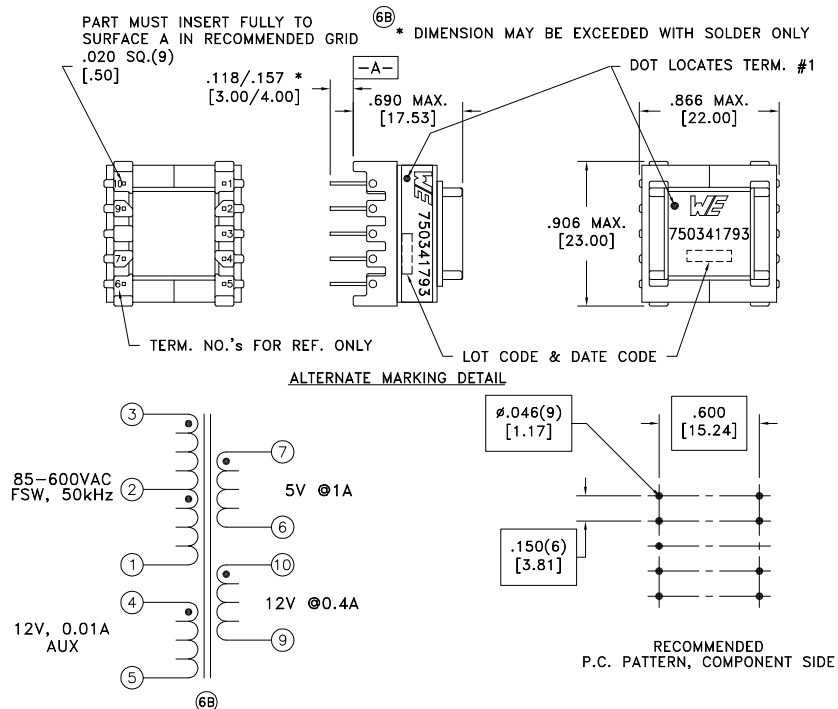

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-1 @20°C	2.380 ohms ±10%
D.C. RESISTANCE	4-5 @20°C	0.955 ohms ±10%
D.C. RESISTANCE	7-6 @20°C	0.045 ohms max.
D.C. RESISTANCE	10-9 @20°C	0.207 ohms ±10%
INDUCTANCE	3-1 50kHz, 1.0VAC, L _s	2.25mH ±5%
LEAKAGE INDUCTANCE	3-1 tie(4+5+6+7+9+10), 100kHz, 100mVAC, L _s	30.0uH max.
DIELECTRIC	1-10 tie(3+4, 7+9), 3000VAC, 1 second	-
DIELECTRIC	1-Core tie(3+4), 1500VAC, 1 second	-
URNS RATIO	(3-1):(4-5)	6.20:1, ±1%
URNS RATIO	(3-1):(7-6)	14.90:1, ±1%
URNS RATIO	(3-1):(10-9)	6.47:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 Footprint: ±.001	DRAWING TITLE	PART NO.
		Method: Tray PKG-0736 www.we-online.com/midcom			TRANSFORMER	750341793
6B	3/17	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341793	SPECIFICATION SHEET 1 OF 1
6A	7/13					

