

# Miniature Incandescent Indicators


FOR REAR MOUNTING IN 9/16" CLEARANCE HOLE  
FOR 6 TO 60V OPERATION



T-2  
WITH TELEPHONE  
SLIDE BASE

See lamp ratings  
on page J.

For materials and finishes of products in this group, see page 4D.

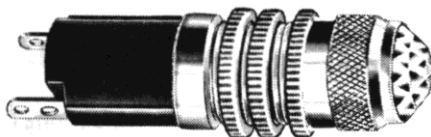

37-0428-0431-305

Faceted lens

37 SERIES  
33 SERIES


BASE PART NUMBERS

WITH SCREW-ON LENS CAPS		
	solder terminals	screw terminals
	33-0428-01-305	33-1328-01-305
CAP PART NUMBERS	COMPLETE ASSEMBLY PART NUMBERS	
<p><b>CONVEX</b> 37-0111-300 back frosted 37-0131-300 unfrosted</p>	<p>37-0428-0111-305 37-0428-0131-305</p>	<p>37-1328-0111-305 37-1328-0131-305</p>
<p><b>FACETED</b> 37-0431-300 unfrosted</p>	<p>37-0428-0431-305</p>	<p>37-1328-0431-305</p>

CAP PART NUMBERS	WITH FRICTION-FIT LENS CAPS	
<p><b>FLAT</b> 33-0211-300 back frosted 33-0231-300 unfrosted 33-0331-300 transparent ■ 33-0351-300 translucent</p> <p>For legends on flat faced lens, see page P.</p>	<p>33-0428-0211-305 33-0428-0231-305 33-0428-0331-305 ■ 33-0428-0351-305</p>	<p>33-1328-0211-305 33-1328-0231-305 33-1328-0331-305 ■ 33-1328-0351-305</p>


■ Specify translucent colors as follows: Red—0351 ... Green—0352 ... Yellow (Amber)—0373 ... White—0375 ... Light Yellow—0376.

Order complete with lamp to be assured of receiving the indicator light and correct lamp together for immediate use.

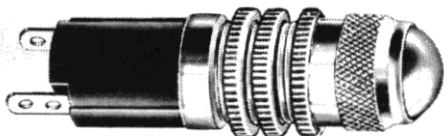

37-0428-0111-305

Convex lens

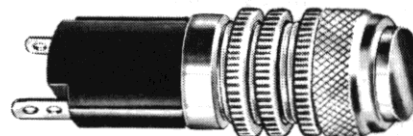

33-0428-0211-305

Flat lens