


CIRCUIT DIAGRAM

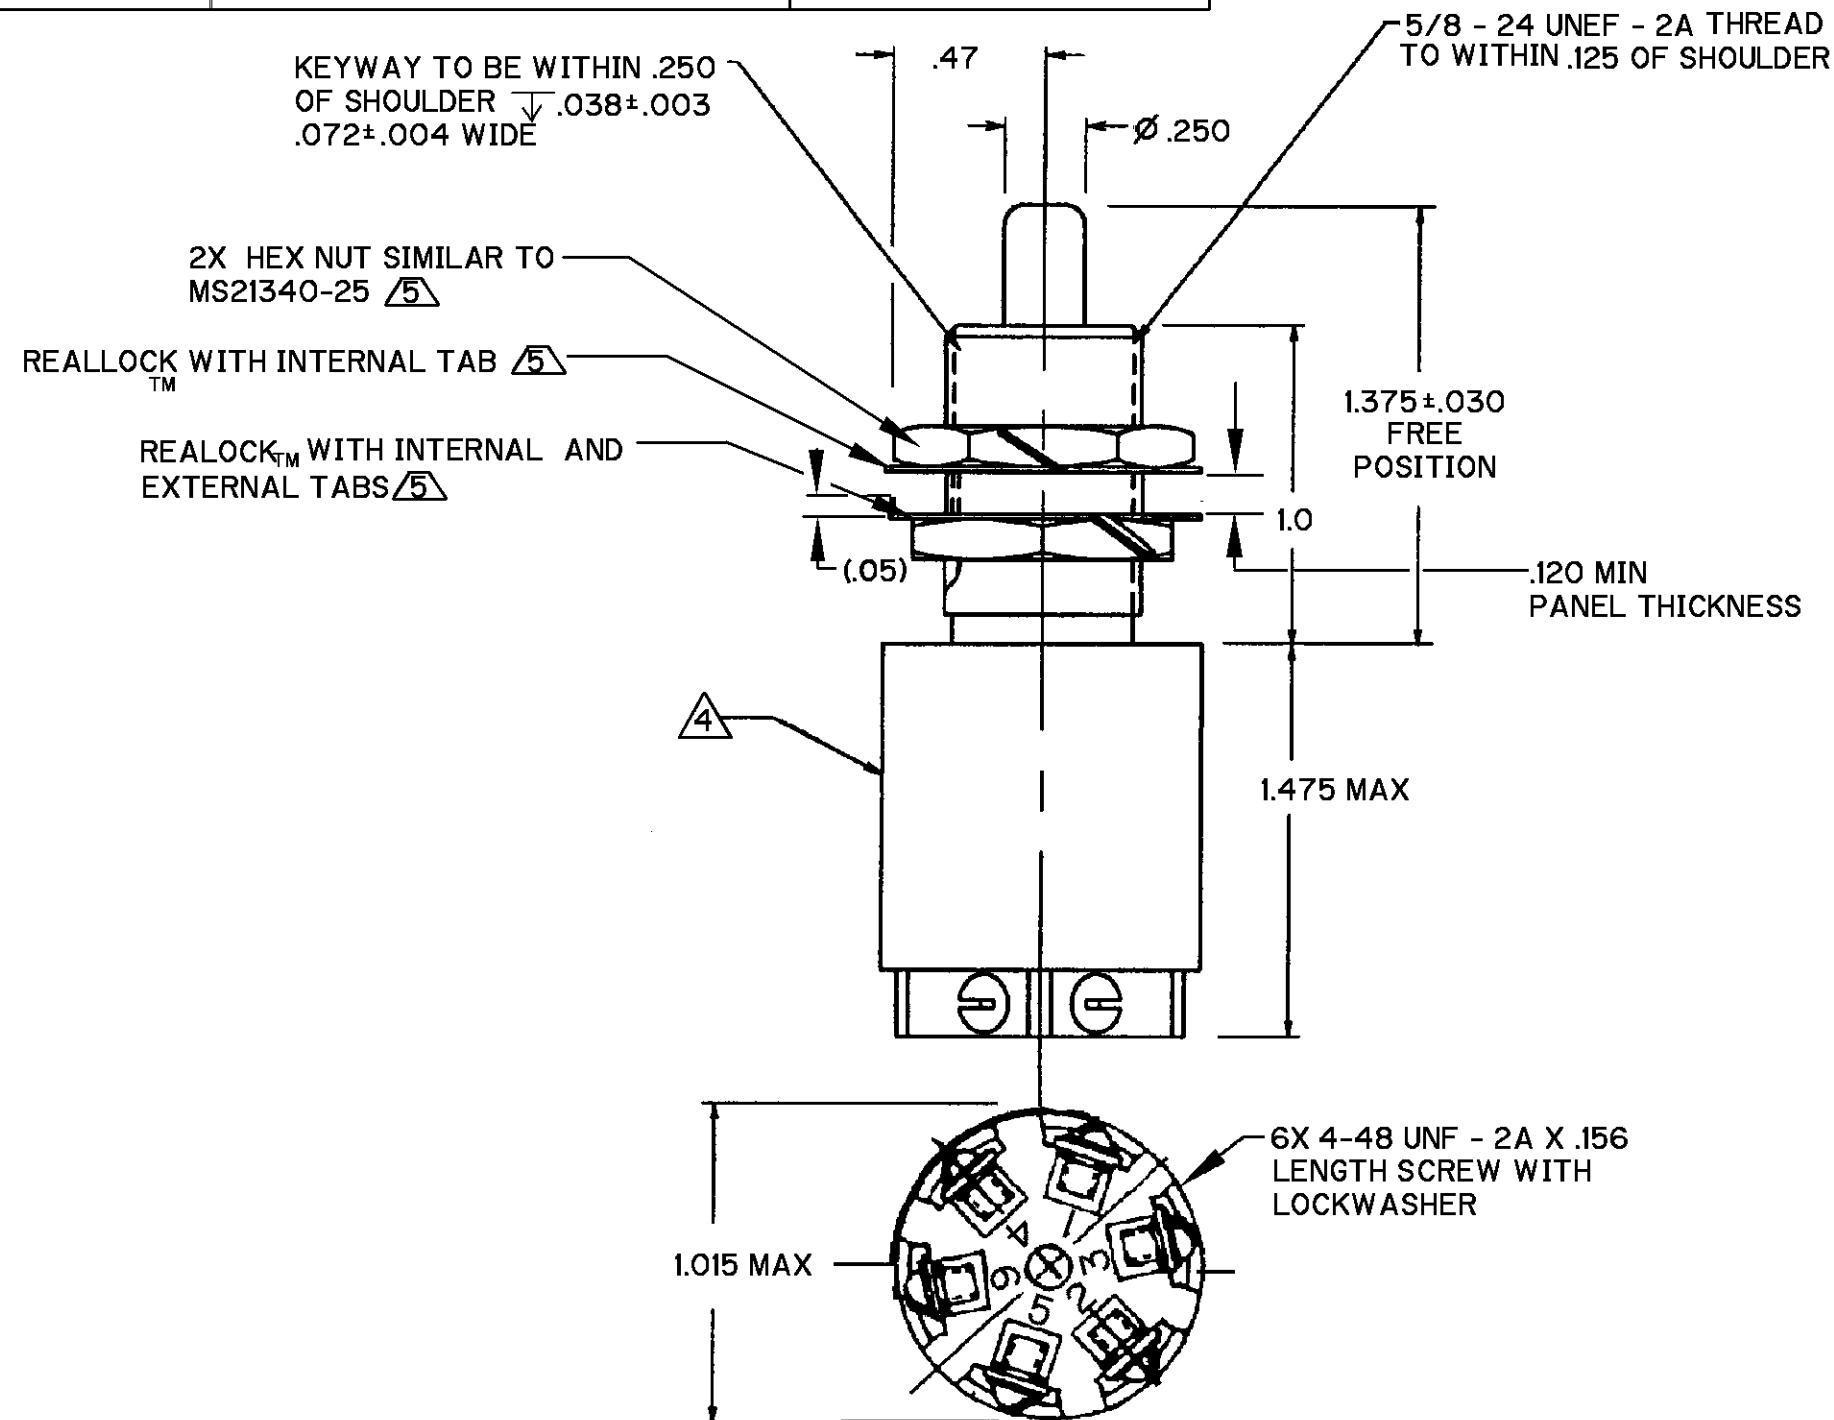


NOTES

- 1- COINCIDENCE OF OPERATING POINTS: CIRCUIT 1,2,3 TO
CLOSE .005 MIN BEFORE CIRCUIT 4,5,6
- 2 - CORROSION RESISTANT STEEL ENCLOSURE, BUSHING AND PLUNGER
- 3- SWITCH SEALED PER MIL - PRF - 8805 SYMBOL 4
-  PRINT CIRCUIT DIAGRAM, CATALOG LISTING AND DATE CODE
ON NAME PLATE
-  HARDWARE FURNISHED UNASSEMBLED PER MIL - PRF - 8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



SCALE 2 : 1

DO NOT SCALE PRINT

CHARACTERISTICS

OPERATING FORCE-	- - - - -	6 - 12 LBS
FULL OVERTRAVEL FORCE-	- -	-30 LBS MAX
RELEASE FORCE-	- - - - -	4 LBS MIN
PRETRAVEL-	- - - - -	-.040 MAX
DIFFERENTIAL TRAVEL-	- -	-.020 MAX
OVERTRAVEL-	- - - - -	-.250 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
2X SPDT SILVER

LOAD (AMPS)	28 VDC	
	SEA LEVEL	50,000 FT.
RES	7	7
IND	4	2.5
MOTOR	4	

ONE PLACE (.0) $\pm .030$

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES $\pm 4^\circ$

WEIGHT