
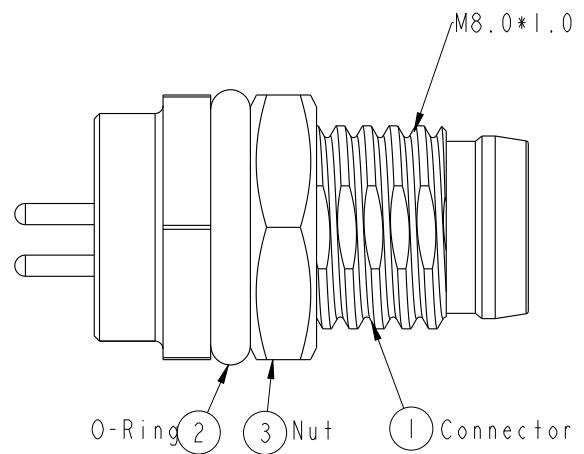
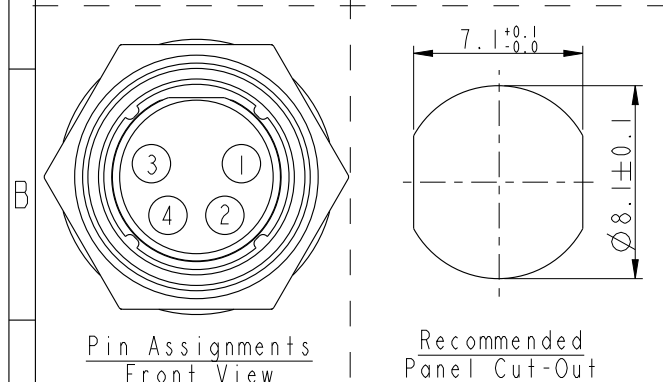
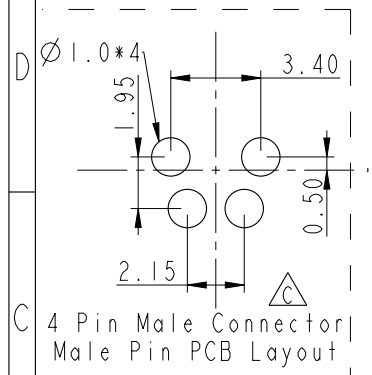


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-7A0181	2007/09/29	Myrdal	Added Note
C	LEN-910187	2009/01/07	Ivan Lin	Change rev. to ECN note
D	CI92160	2019/12/21	Peng	$\triangle$ XI

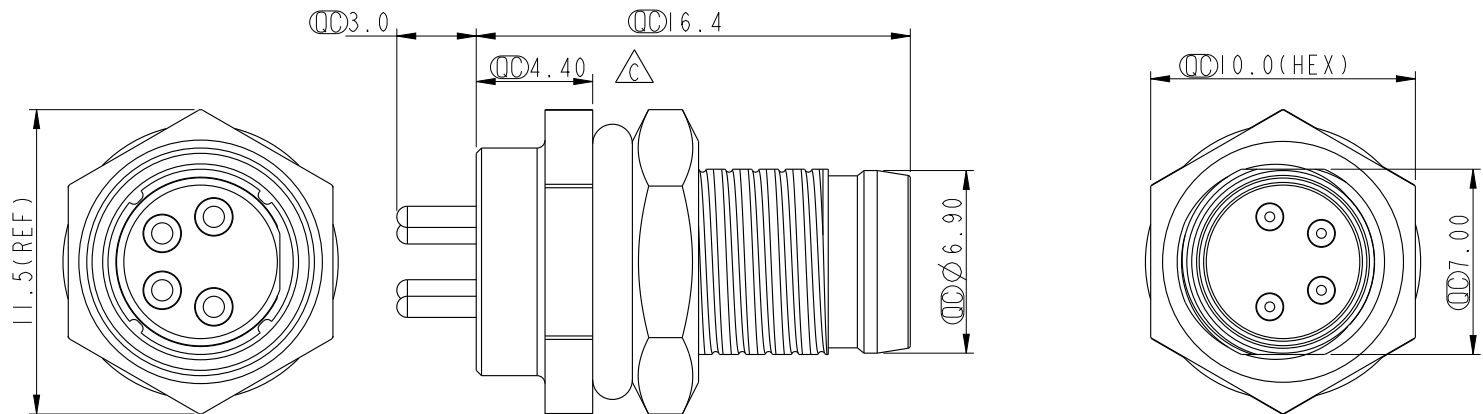

- $\triangle$ Note:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate: IP67
 - * Housing: Black, Nylon+GF
 - * Male Pin: Copper Alloy, Gold Plated
 - * Shield: Zinc Alloy, Nickel Plated
 - * Nut: Copper Alloy, Nickel Plated
 - * O-Ring: Black, EPDM
 - * Panel Thickness For Snap-in Type Max 3.0mm
 - * Panel Thickness For Screw Type Max 1.9mm
 - * Nut Torque: 4-6 kgf.cm

A	UNIT:mm			TITLE M8 Conn Panel Screw 4P M Conn M Pin			ITEM NO 8-04PMMP-SF7002		DRAWN BY Ivan Lin		DATE 2009/01/07												
	TOLERANCE			SCALE 7:2			DWG NO 8-04PMMP-SF7002		CHECKED BY Tommy Hom		DATE 2009/01/07												
	.X ±0.25			SIZE A4			SHEET 1 OF 1		APPROVED BY		DATE												
	.XX ±0.1			REV. D			WC-REV. A.3		ALTW		2009/01/07												
	.XXX ±0.05			QC: Inspection item			Customer		LUKE CHANGE		2009/01/07												
ANGLES ±1°																							
1			2			3			4			5			6			7			8		
																					WI0814-03-0001A		