


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		A8	REVISED PER ECR-16-012107	25AUG2016	RS	PO
			A9	REVISED PER ECR-16-014606	18OCT2016	RK	ASM
			A10	REVISED PER ECR-17-014440	04OCT2017	RK	DD
			A11	REVISED PER ECR-18-003629	19MAR2018	GCM	DD

NOTES:


- 1.MATERIALS:
HOUSING: GLASS-FILLED THERMOPLASTIC, UL 94V-0 RATED DIMMING
CONTACTS (2 OR 4) AND LINE VOLTAGE CONTACTS (3): COPPER ALLOY
- 2.FINISH:
DIMMING CONTACTS (2 OR 4): NICKEL UNDERPLATE ENTIRE CONTACT
0.127 µm MIN THICK. GOLD PLATE CONTACT PAD AREA (MATING FACE
SIDE ONLY) 0.76 µm MIN THICK. MATTE TIN PLATE TAB ON BOTH SIDES
0.30 µm MIN THICK. LINE VOLTAGE CONTACTS (3): TIN PLATE.

- 3 LINE VOLTAGE CONDUCTORS (3):
14 AWG, 600V, 150°C RATED, COPPER 41/30 STRANDED
PER UL STYLE AWM 3321.
- 4 MATING INTERFACE PER ANSI C136.41-2013.
- 5 OPTIONAL DIMMING CONTACTS (2) SUPPLIED.
- 6 DIMMING CONDUCTORS (2 OR 4):
18 AWG, 600V, 150°C RATED, 16/30 STRANDED,
PER UL STYLE AWM 3321.
- 7 LINE VOLTAGE CONDUCTORS (3):
14 AWG, 600V, 105°C RATED, COPPER 41/30 STRANDED.
PER UL STYLE AWM 1015.
- 8 DIMMING CONDUCTORS (2 OR 4):
18 AWG, 600V, 105°C RATED, COPPER 16/30 STRANDED.
PER UL STYLE AWM 1015.
- 9 LUBRICATION: GOLD PLATED CONTACT PAD SURFACES OF DIMMING CONTACTS
ARE LUBRICATED WITH A TRANSPARENT (NON-VISIBLE) LUBRICANT TO
IMPROVE DURABILITY AND PERFORMANCE. AVOID CONTACT WITH THESE
SURFACES WHICH MAY RESULT IN REMOVAL OF LUBRICANT.

- 10 PRELIMINARY.
- 11 FOR PART NUMBER 5-2213362-4 ONLY,
STRIP AND REMOVE INSULATION AS SHOWN.
LEAD WIRES TO BE SOLDER DIPPED.

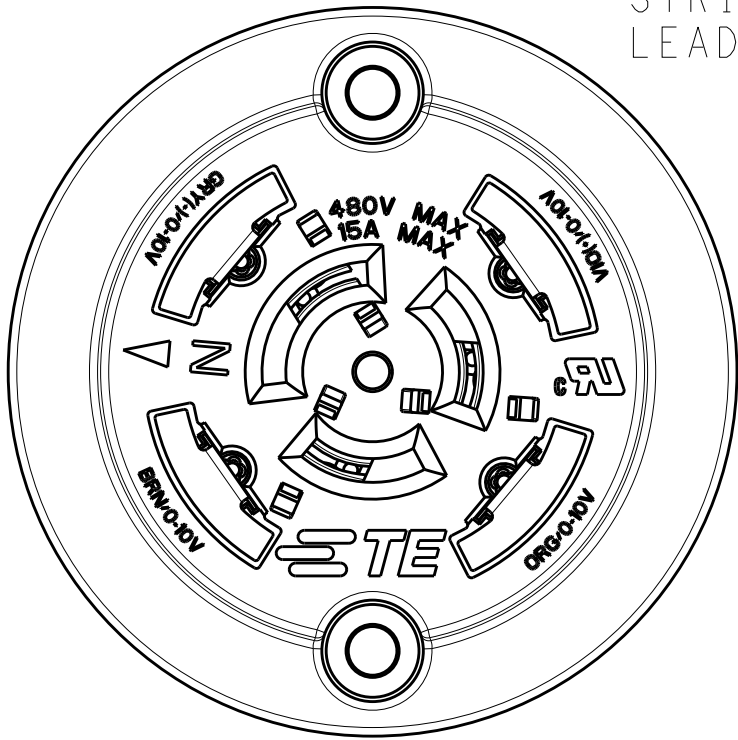

SEE SHEET 2 FOR
WIRING COLOR CODE

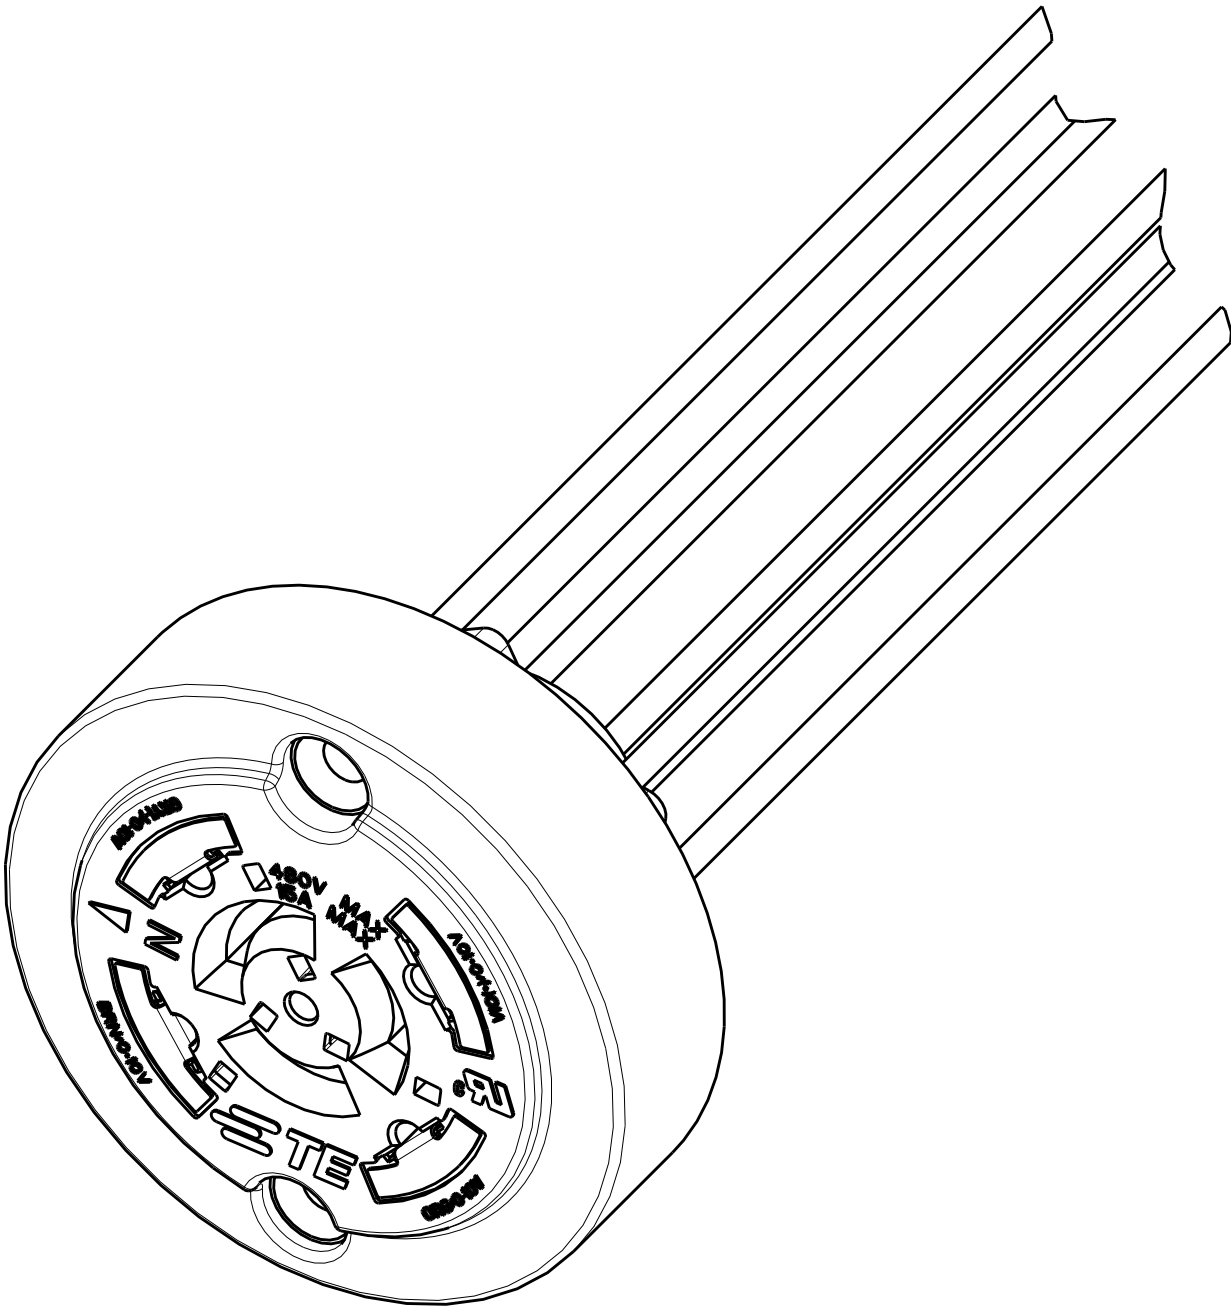

341.1	304.8	-	3		-	6-2213362-2 10
341.1	304.8	291.3	7 AND 8		4 5	5-2213362-4 11 10
950.7	914.4	914.4	7 AND 8		4 5	4-2213362-4 10
73.0	35.0	35.0	7 AND 8		4 5	3-2213362-4 10
1865.1	1828.8	1815.3	3 AND 6		2	3-2213362-1 10
736.3	700.0	686.5	7 AND 8		4 5	2-2213362-4
696.3	660.0	646.5	3 AND 6		4 5	2-2213362-2 10
696.3	660.0	646.5	3 AND 6		2	2-2213362-1
536.3	500.0	486.5	7 AND 8		4 5	1-2213362-4
536.3	500.0	486.5	7 AND 8		2	1-2213362-3 10
536.3	500.0	486.5	3 AND 6		2	1-2213362-1 10
341.1	304.8	291.3	7 AND 8		4 5	2213362-4
341.1	304.8	291.3	7 AND 8		2	2213362-3
341.1	304.8	291.3	3 AND 6		4 5	2213362-2
341.1	304.8	291.3	3 AND 6		2	2213362-1
C	A	B	WIRE STYLE	QUANTITY OF DIMMING CONTACTS	PART NO.	
OVERALL LENGTH	WIRE LENGTH					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±0.13
3 PLC ±
4 PLC ±
ANGLES ±
FINISH

-

DWN
J. SHAFFER
CHK
E. HOWARD
APVD
F. HOWARD

26 JUN 2013
26 JUN 2013
26 JUN 2013

PRODUCT SPEC
108-32059
APPLICATION SPEC
114-32115
WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

RECEPTACLE ASSEMBLY,
DIMMABLE PHOTOCONTROL

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-2213362

RESTRICTED TO
-


SCALE
1:1

SHEET
1


OF
2

REV
A11

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

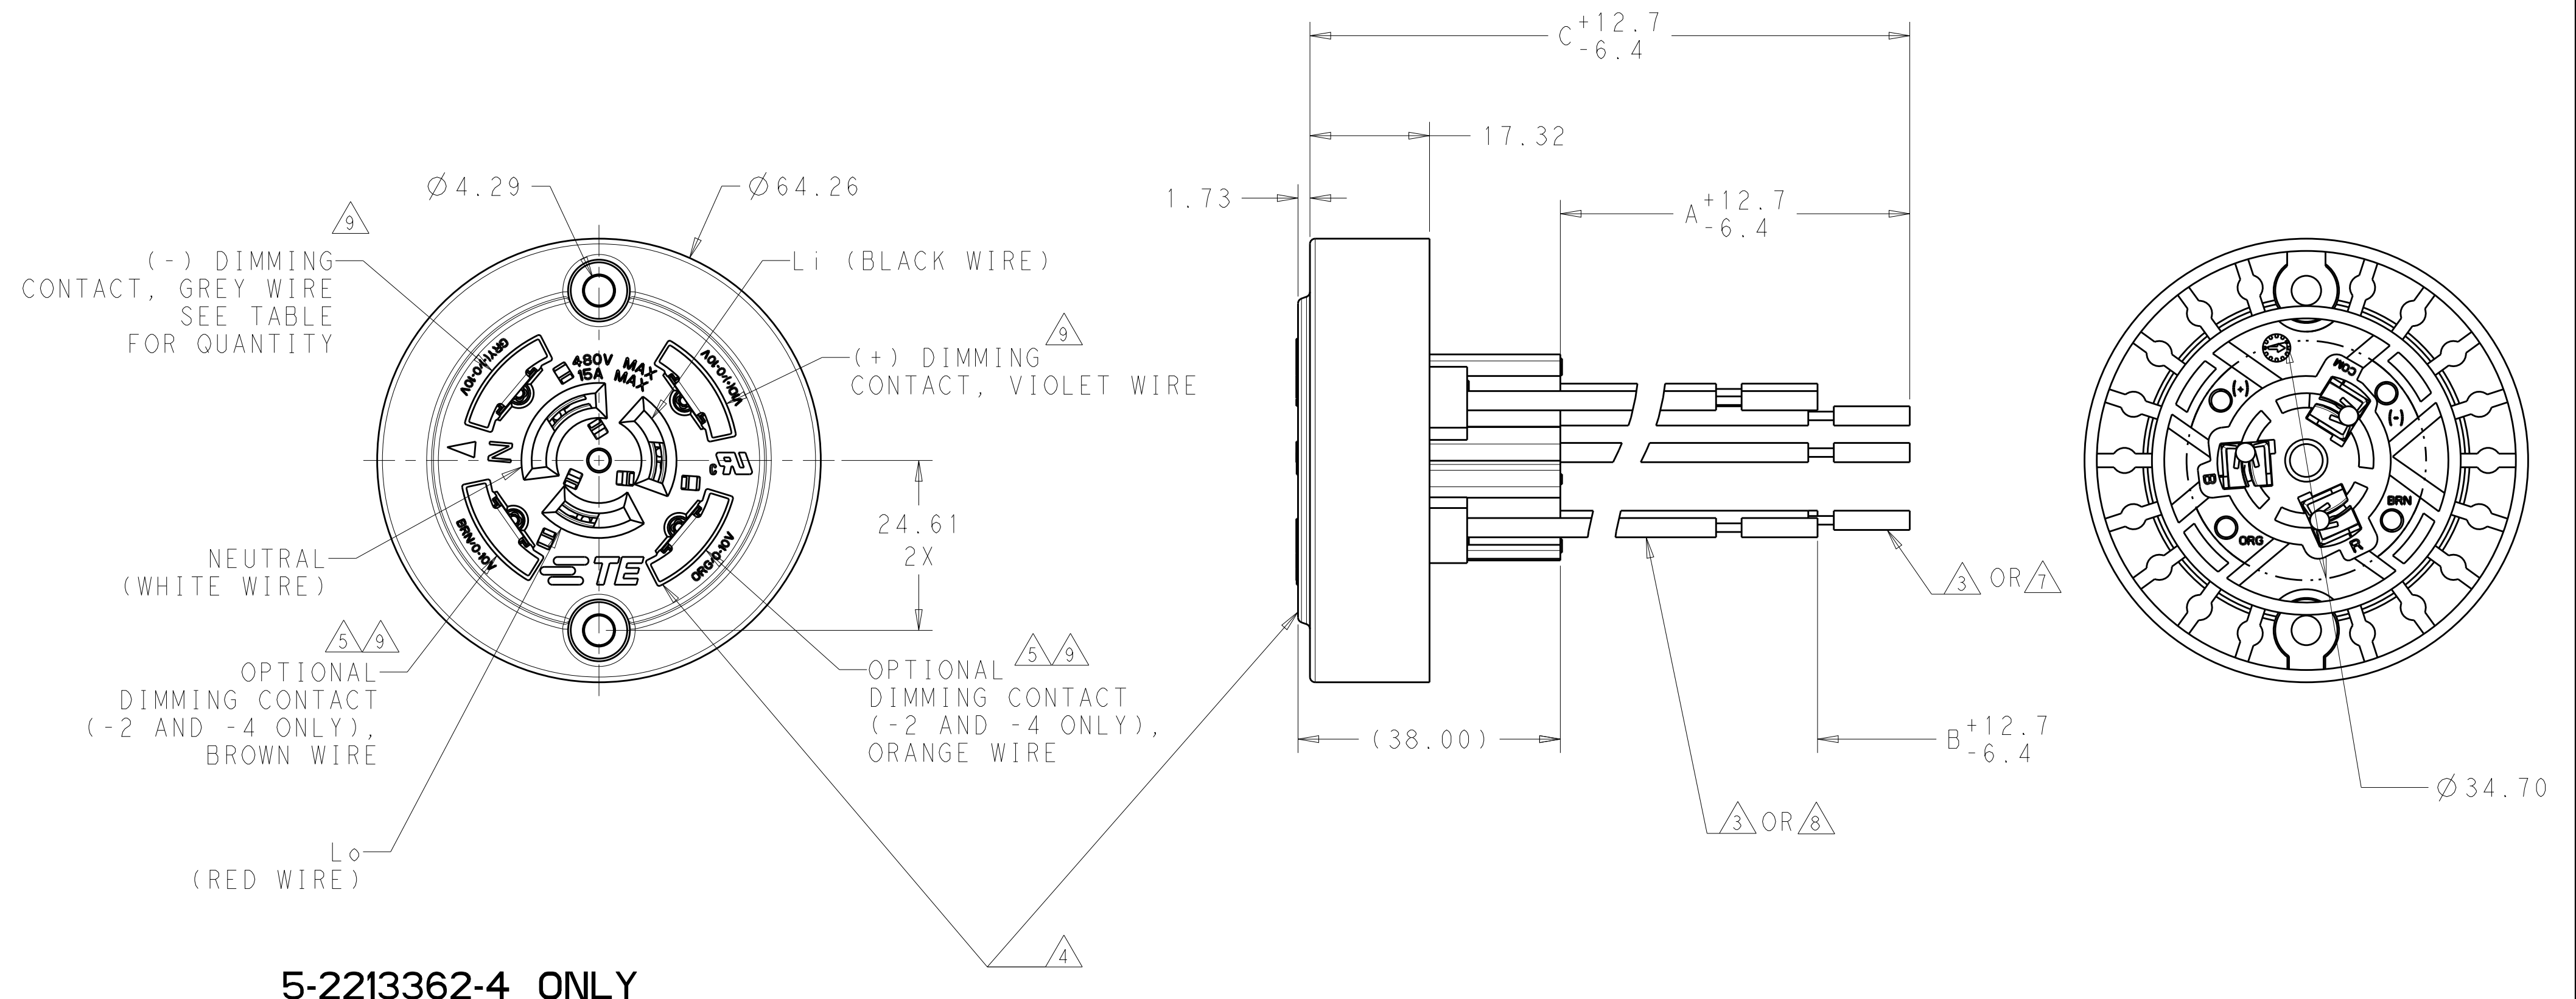

5-2213362-4 ONLY

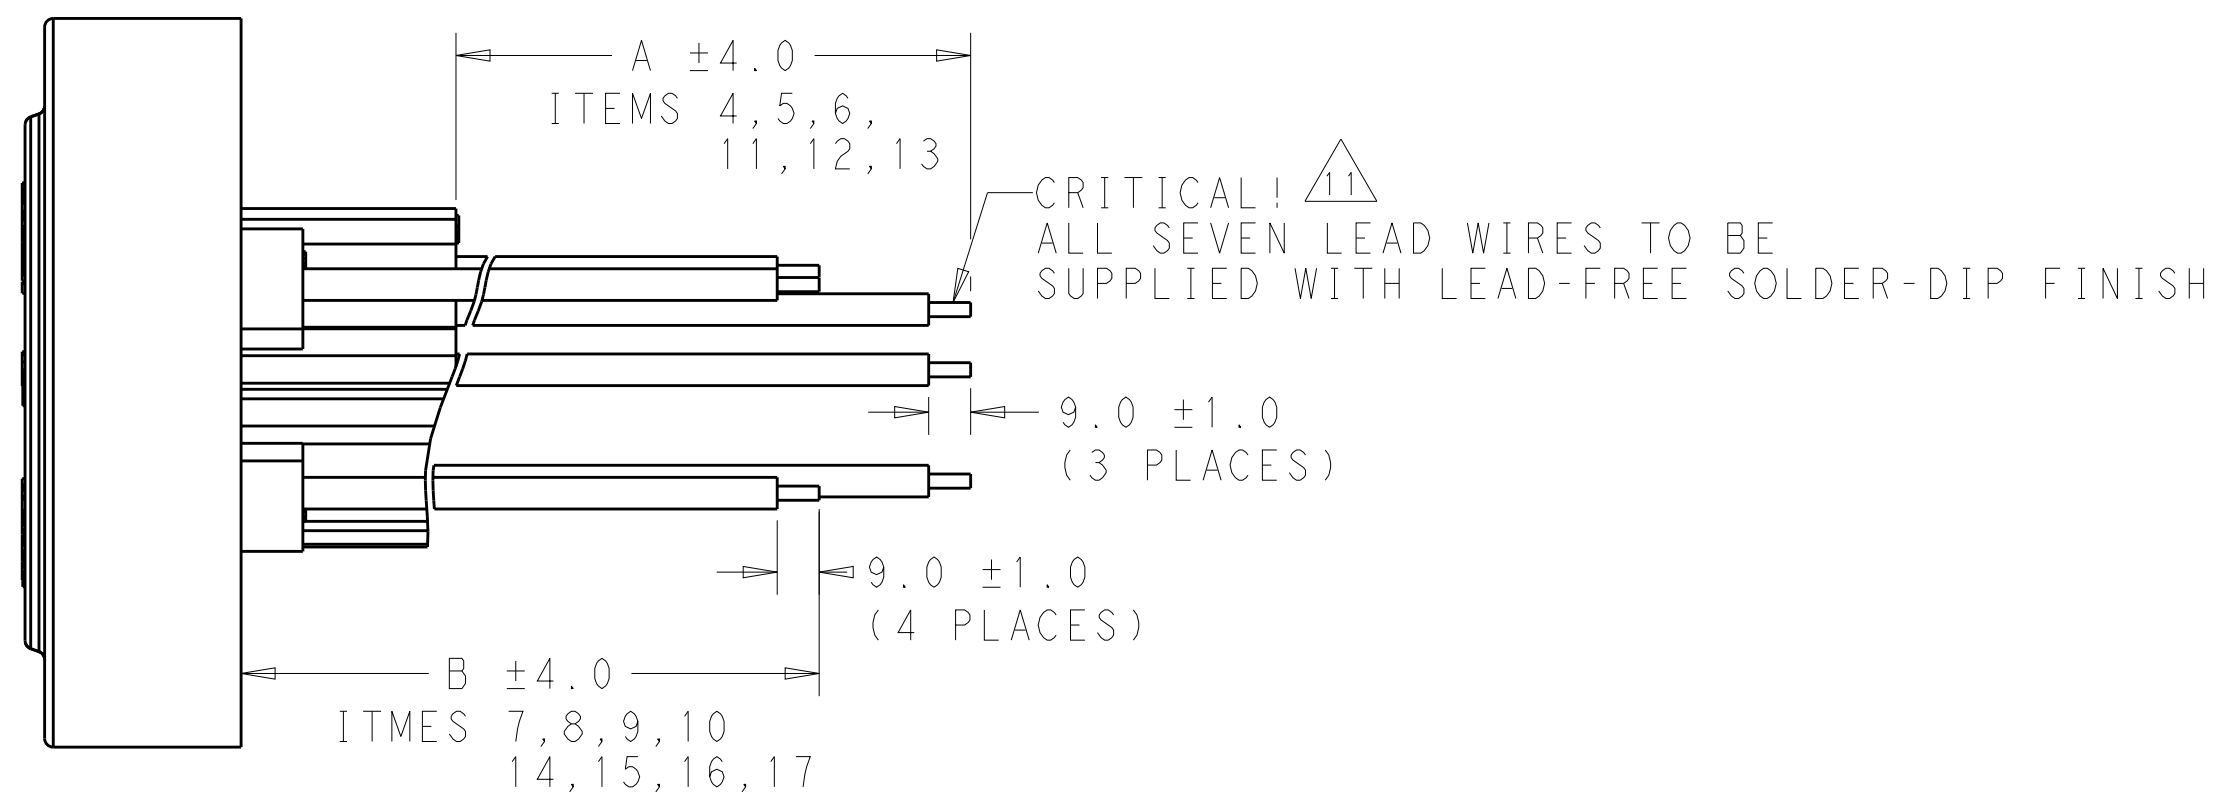

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SHAFFER 26 JUN 2013 CHK F. HOWARD 26 JUN 2013 APVD F. HOWARD 26 JUN 2013		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH		NAME RECEPTACLE ASSEMBLY, DIMMABLE PHOTOCONTROL -	
MATERIAL -		PRODUCT SPEC 108-32059 APPLICATION SPEC 114-32115 WEIGHT -		SIZE A2	CAGE CODE 00779
		CUSTOMER DRAWING		DRAWING NO C-2213362	RESTRICTED TO -
				SCALE 1:1	SHEET 2 OF 2
				REV A11	