



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect


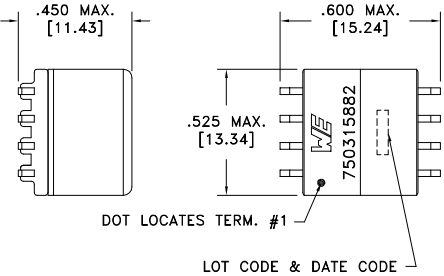


TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1

LOT CODE & DATE CODE

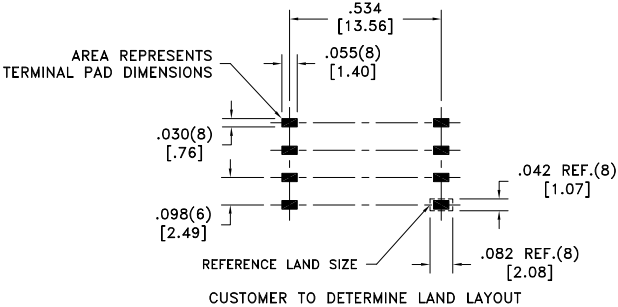

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	0.065 ohms ±10%
D.C. RESISTANCE	5-8 @20°C	0.070 ohms ±10%
INDUCTANCE	1-4 10kHz, 100mVAC, Ls	22.7uH ±10%
SATURATION CURRENT	1-4 20% rolloff from initial	3.75A
LEAKAGE INDUCTANCE	1-4 tie(5+8), 100kHz, 100mVAC, Ls	0.70uH typ., 1.50uH max.
DIELECTRIC	1-8 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-4):(5-8)	1.26:1, ±1%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Functional insulation only.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel		Angles: $\pm 1^\circ$	TRANSFORMER	750315882
		PKG-0328		Fractions: $\pm 1/64$		
		www.we-online.com/midcom		Decimals: $\pm .005$ [.13]		
				Footprint: $\pm .005$ [.13]		
6A	2/16	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750315882	SPECIFICATION SHEET 1 OF 1

