


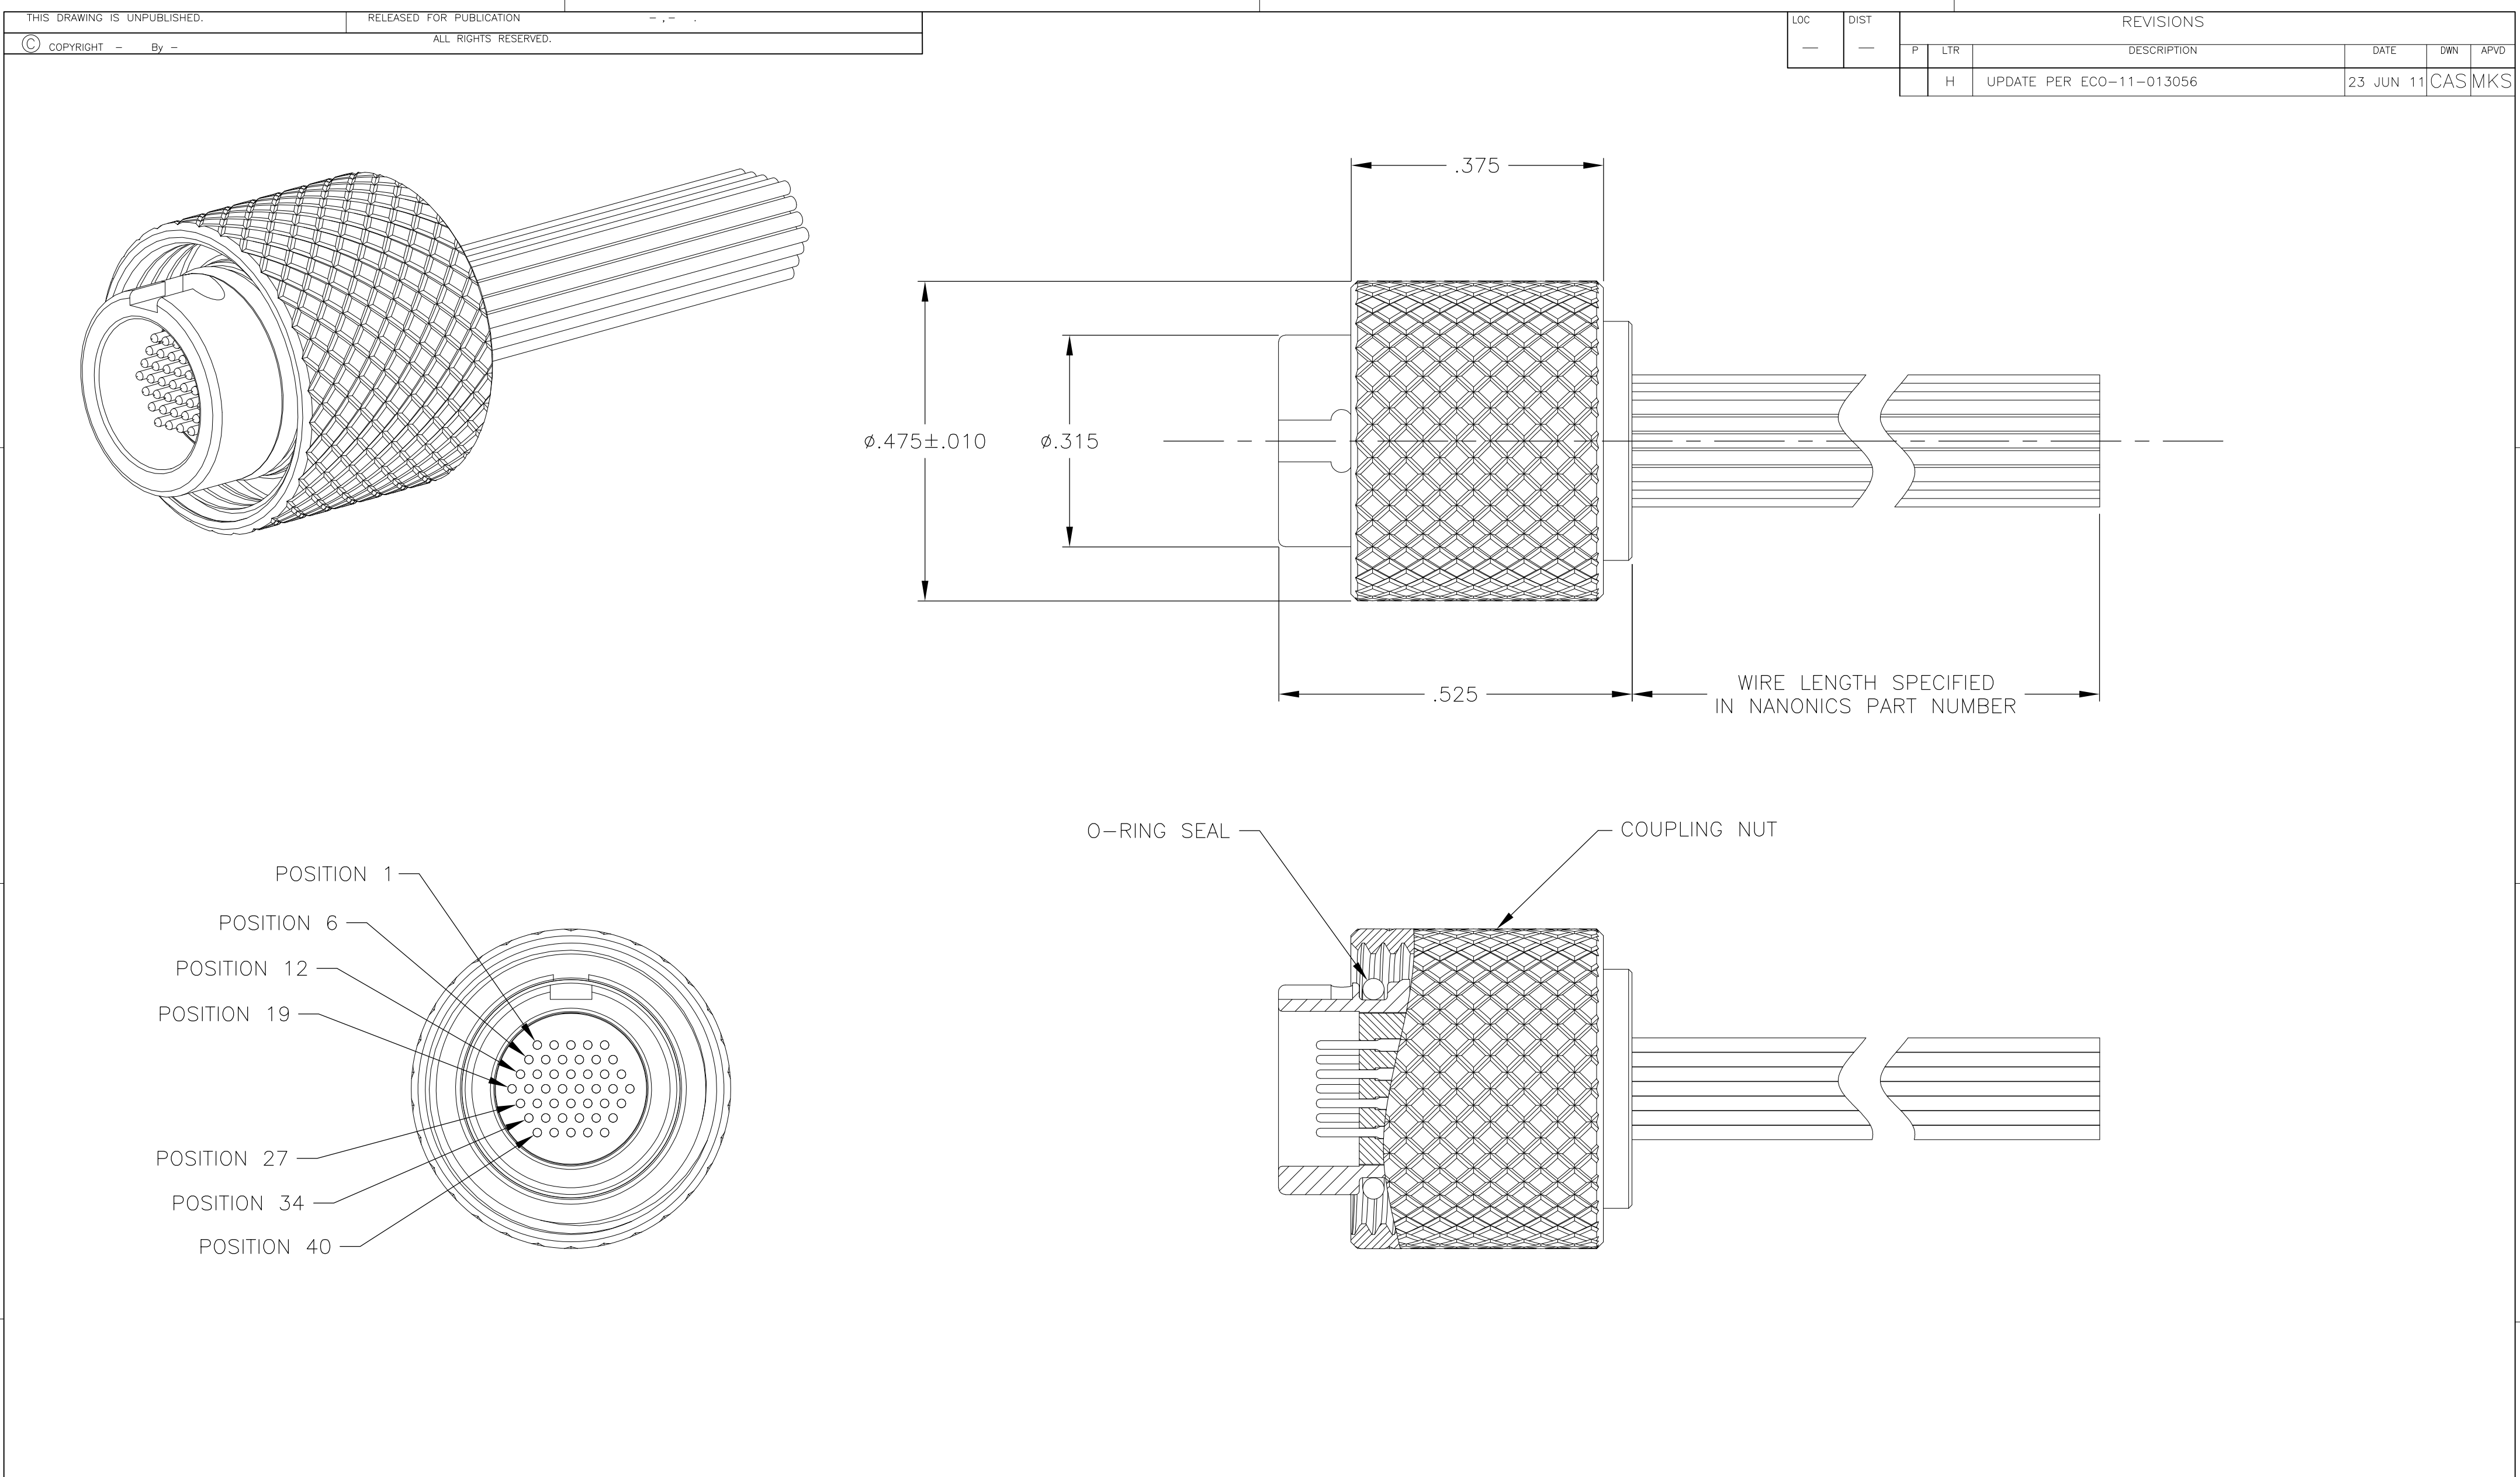

- 1 CONNECTOR BODY AND COUPLING NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE
- 2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER
- 3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
- 4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0034

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .010 3 PLC ± .005 4 PLC ± - ANGLES ± 1°	DWN M. STORRY 20 MAY 99 CHK E. PAULUS 11 JUN 99 APVD S. KAIN 27 JAN 00	TE Connectivity			
MATERIAL SEE NOTES	FINISH SEE NOTES	PRODUCT SPEC — APPLICATION SPEC — WEIGHT —	NAME PLUG ASSEMBLY, CIRCULAR, THREADED COUPLING, METAL, 44 POSITION			RESTRICTED TO —
CUSTOMER DRAWING		SCALE 6:1	SIZE A2	CAGE CODE 0PJN9	DRAWING NO C-1589065	SHEET 1 OF 1

REV
H