
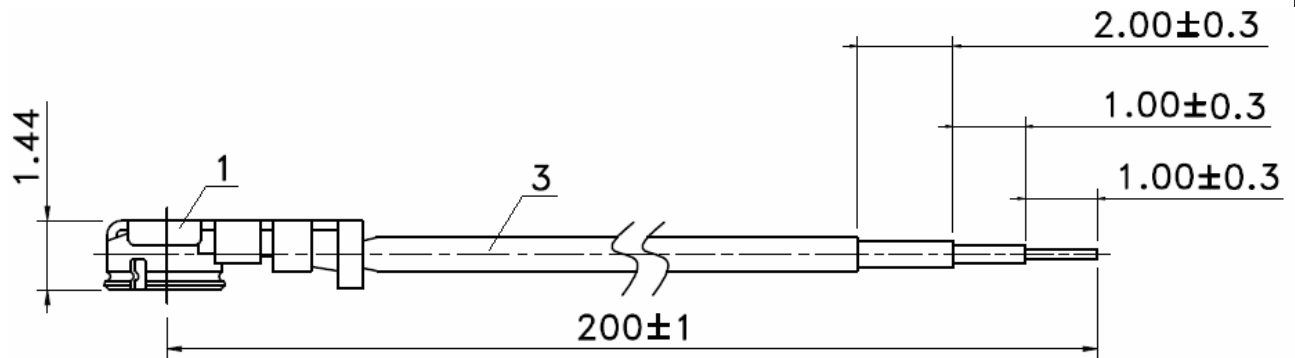


**PLUG MML H2.0 - PIGTAIL****R302.205.001****CABLE 1.13/50 S-BR, LENGTH 20CM**Series : **MML**

All dimensions are in mm.



- \* 1 \* Connector A : **MML PLUG(gold plated ) H2.0**
- \* 2 \* Connector B : **NA**
- \* 3 \* Cable : **1.13/50 S BLACK**

**ELECTRICAL CHARACTERISTICS**

|                         |                                 |
|-------------------------|---------------------------------|
| Impedance               | <b>50 Ω</b>                     |
| Frequency               | <b>0-3 GHz</b>                  |
| Operating temperature   | <b>-40/+90 ° C</b>              |
| VSWR                    | <b>NA + 0,000 x F(GHz) Maxi</b> |
| Insertion loss          | <b>NA √F(GHz) dB Maxi</b>       |
| Voltage rating          | <b>200 Veff Maxi</b>            |
| Dielectric withstanding | <b>200 Veff mini</b>            |
| Insulation resistance   | <b>500 MΩ mini</b>              |

**SPECIFICATION**

|                 |                     |
|-----------------|---------------------|
| Weight          | <b>0,7000 g</b>     |
| Cable retention | <b>12.74 N mini</b> |
| Mating life     | <b>30 Cycles</b>    |
| Others :        |                     |

**RADIAL** 
**Edition : 1020 A**

Design changes may be in order to improve the product.