Features

- Low Gate Threshold Voltage
- Low Input Capacitance
- Low On-Resistance
- Epoxy Meets UL 94 V-0 Flammability Rating
- Moisture Sensitivity Level 1
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

N-Channel MOSFET

Maximum Ratings

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Thermal Resistance: 833°C/W Junction to Ambient

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	60	V
Gate-Source Voltage	Continuous	V_{GS}	±20	V
	Pulsed		±40	V
Drain-Gate Voltage	R_{GS} ≤1.0MΩ	V_{DGR}	60V	V
Drain Current[1]	Continuous	I_D	0.115	A
	Continuous@100°C		0.073	A
	Pulsed		0.80	A
Power Dissipation[1]		P_D	0.15	W

Note: 1. Valid Provided That Terminals are Kept at Specified Ambient Temperature.

Internal Structure



1. GATE
2. SOURCE
3. DRAIN

Marking: K72

SOT-523



DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.059	0.067	1.50	1.70	
B	0.030	0.033	0.75	0.85	
C	0.057	0.069	1.45	1.75	
D	0.020		0.50		TYP.
E	0.035	0.043	0.90	1.10	
G	0.000	0.004	0.00	0.10	
H	0.024	0.031	0.60	0.80	
J	0.004	0.008	0.10	0.20	
K	0.006	0.014	0.15	0.35	

Suggested Solder Pad Layout

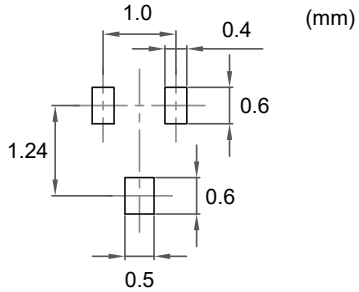

ELECTRICAL CHARACTERISTICS (Ta=25℃ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS}=0V, I_D=10μA	60			V
Gate-Threshold Voltage(2)	$V_{GS(th)}$	V_{DS}=V_{GS}, I_D=250μA	1.0		2.0	V
Gate-Body Leakage	I_{GSS}	V_{DS}=0V, V_{GS}=±20V			±10	μA
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=60V, V_{GS}=0V,T_C=25°C			1.0	μA
		V_{DS}=60V, V_{GS}=0V,T_C=125°C			500	
On-State Drain Current	$I_{D(on)}$	V_{DS}=7.5V, V_{GS}=10V	500	1000		mA
Drain-Source On-Resistance(2)	$R_{DS(on)}$	V_{GS}=10V, I_D=500mA		4.4	13.5	Ω
		V_{GS}=5V, I_D=50mA		2.0	7.5	
Forward Transconductance	g_{fs}	V_{DS} =10V, I_D =200mA	80			ms
Input Capacitance	C_{iss}	V_{DS}=25V,V_{GS}=0V, f=1MHz		22	50	pF
Output Capacitance	C_{oss}			11	25	
Reverse Transfer Capacitance	C_{rss}			2	5	
Turn-On Time	$t_{d(on)}$	V_{DD}=30V,V_{GEN}=10V,R_L=150Ω, I_D=200mA,R_{GEN}=25Ω		7.0	20	ns
Turn-Off Time	$t_{d(off)}$			11	20	

Note: 1. Valid Provided That Terminals are Kept at Specified Ambient Temperature.

2. Pulse Test: Pulse Width ≤300μs, Duty Cycle≤2%.

Curve Characteristics

Fig. 1 - Output Characteristics

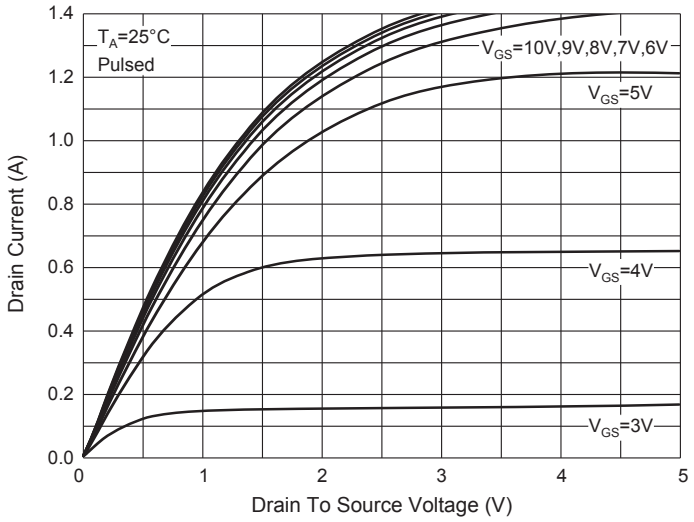

Fig. 2 - Transfer Characteristics

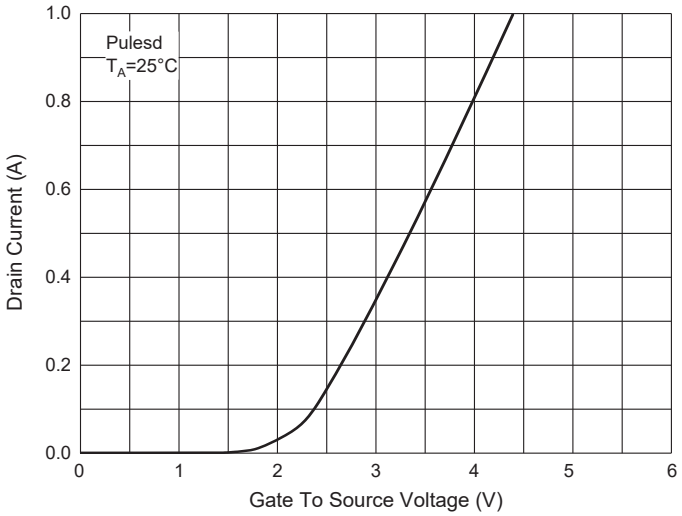

Fig. 3 - $R_{DS(ON)}$—I_D

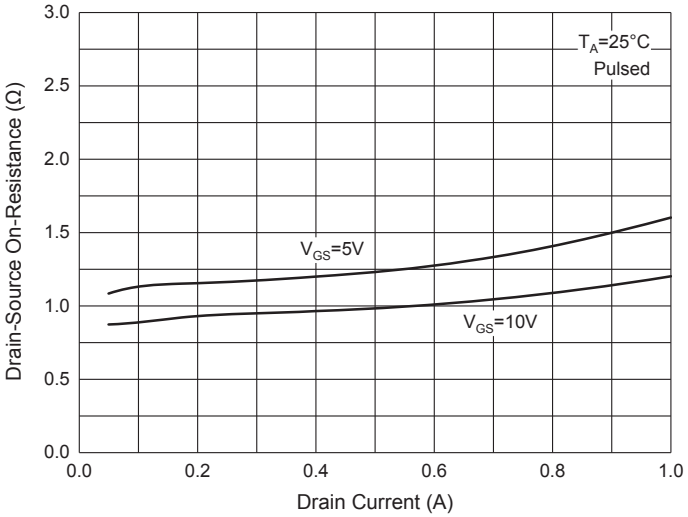

Fig. 3 - $R_{DS(ON)}$—V_{GS}

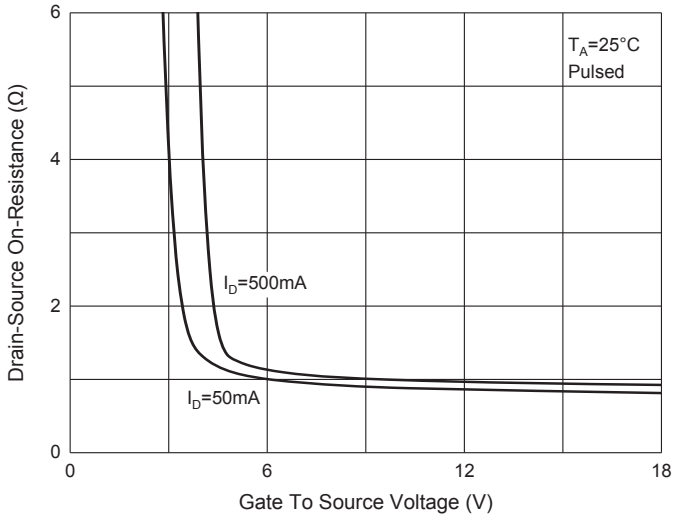

Fig. 5 - I_S—V_{SD}

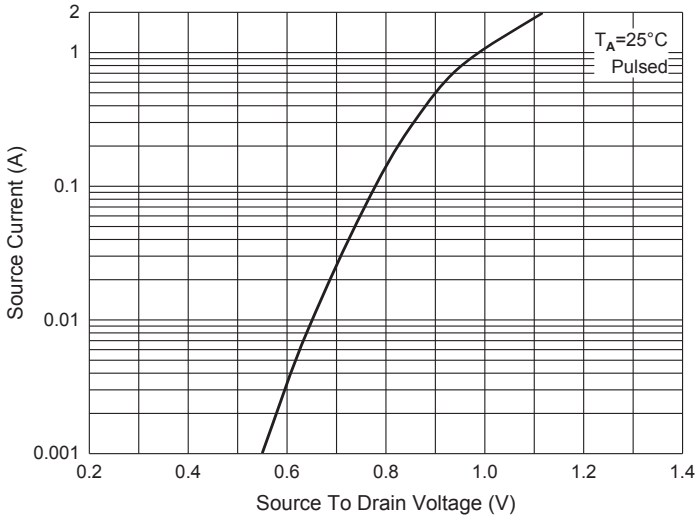

Ordering Information

Device	Packing
Part Number-TP	Tape&Reel:3Kpcs/Reel

Note : Adding "-HF" Suffix For Halogen Free, eg. Part Number-TP-HF

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . ***Micro Commercial Components Corp*** . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold ***Micro Commercial Components Corp*** . and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources**. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.