

2014

RELEASED FOR PUBLICATION


THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

© COPYRIGHT 2014 BY TE CONNECTIVITY

## REVISIONS

| P | LTR | DESCRIPTION                   | DATE     | DWN | APVD |
|---|-----|-------------------------------|----------|-----|------|
|   | A   | NEW RELEASE PER ECO-14-009837 | 07-01-14 | DM  | DM   |

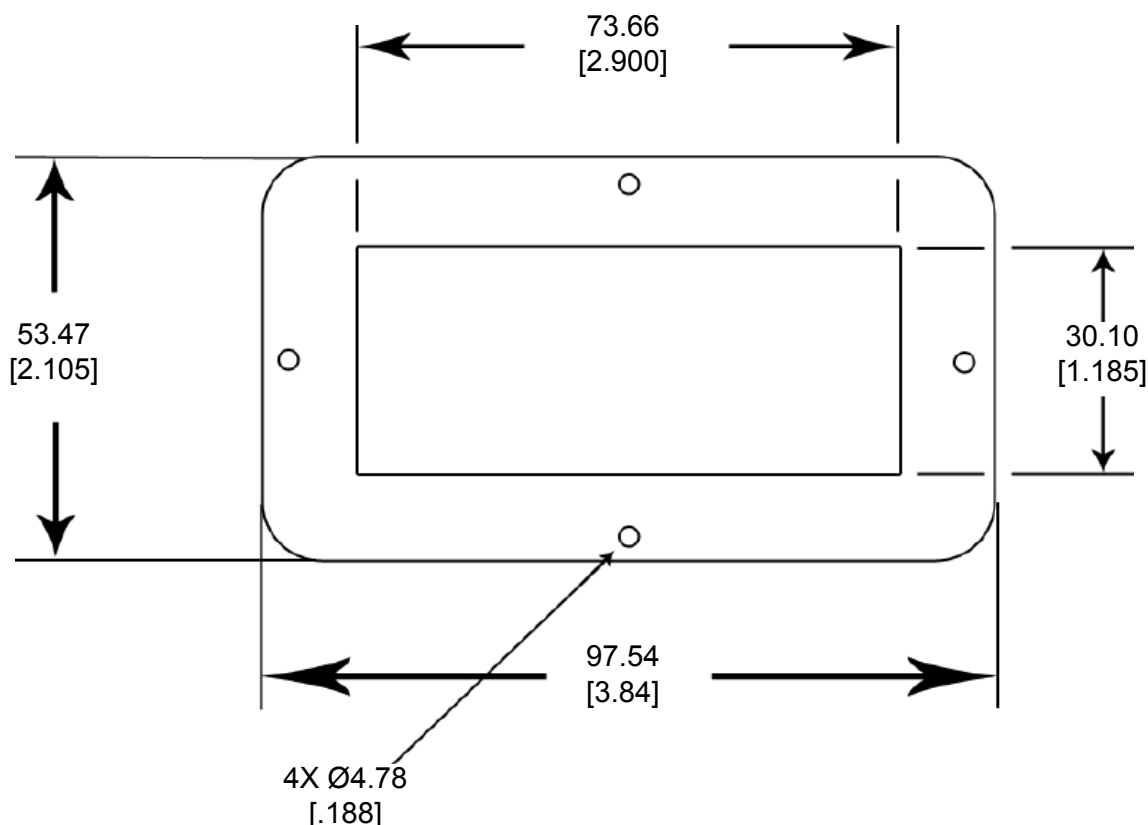

4. PART NO. DRC40-GKT-AD

3. THICKNESS: 3.18 [.125]

2. TEMPERATURE RATING: -57°C TO +107°C [-70°F TO +225°F]


1. THIS PART IS USED ON  
DRC12-40PX(E)-XXXX RECEPTACLE  
WHERE X=A,B,C,D KEYS AND XXXX=MODIFICATION

## DIMENSIONS:

MM [INCH]

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

|        |               |
|--------|---------------|
| 0 PLC  | ±             |
| 1 PLC  | ±             |
| 2 PLC  | ± 0.63 [.025] |
| 3 PLC  | ±             |
| 4 PLC  | ±             |
| ANGLES | ± 5°          |



DWN D. MEYER 01JUL2014

CHK D. HASIBUAN 01JUL2014

APVD D. MEYER 01JUL2014

PRODUCT SPEC

APPLICATION SPEC

WEIGHT .907 G

MATERIAL CLD CELL SPONGE

FINISH BLACK



TE Connectivity

NAME GASKET, ADHESIVE, RECEPTACLE, 40PIN  
DRC SERIES

SIZE

A 4

CAGE CODE

4AFU8

DRAWING NO

C- DRC40-GKT-AD

RESTRICTED TO

-

Customer Drawing

SCALE NONE

SHEET 1 OF 1

REV A