

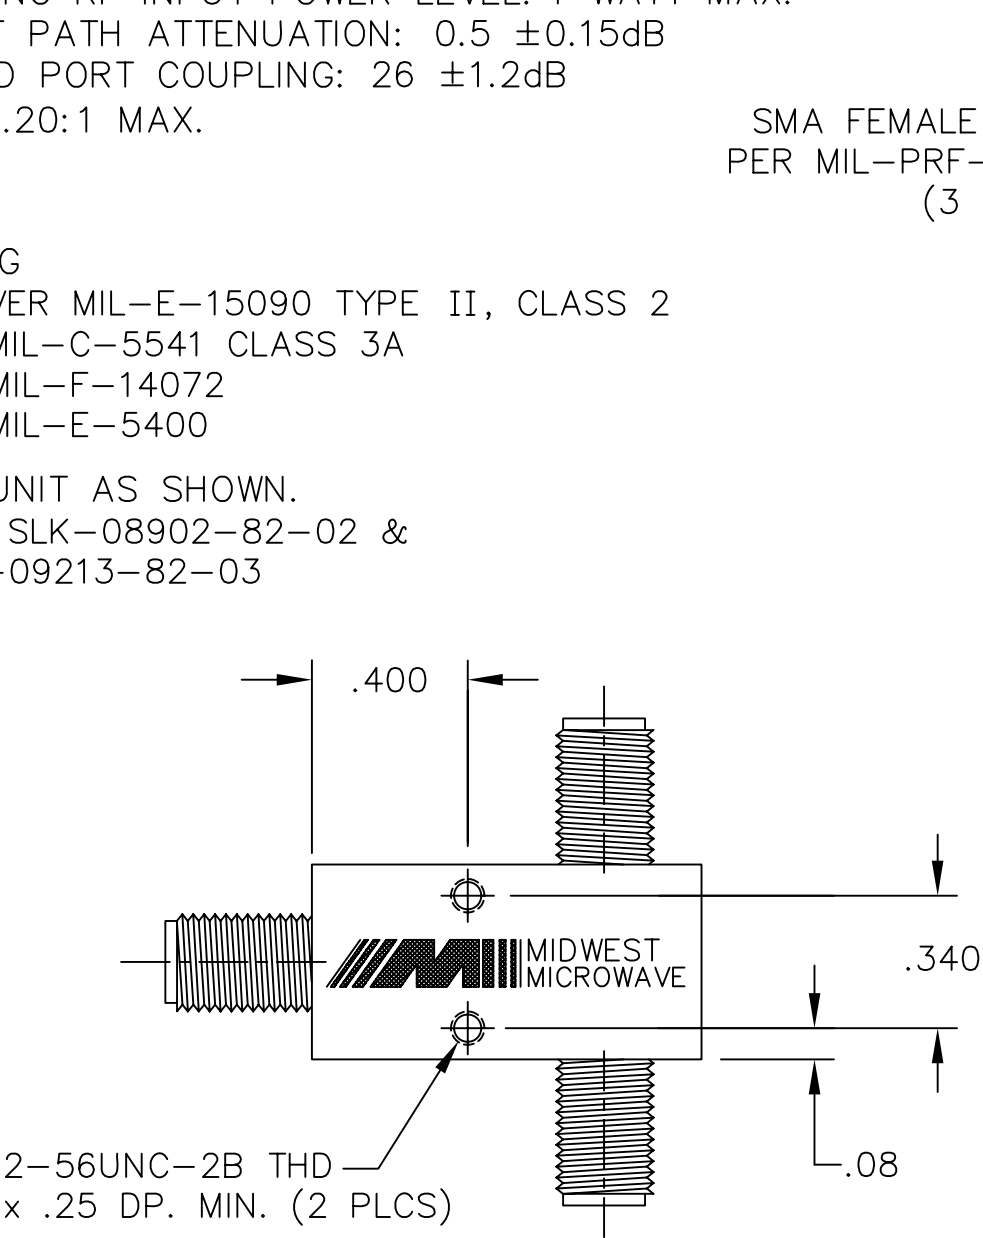


- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC to 2500 MHz
 - 1.2 OPERATING RF INPUT POWER LEVEL: 1 WATT MAX.
 - 1.3 MAIN RF PATH ATTENUATION: 0.5 ±0.15dB
 - 1.4 SAMPLED PORT COUPLING: 26 ±1.2dB
 - 1.5 VSWR: 1.20:1 MAX.

- 2.0 FINISHING
- 2.1 GREY OVER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400
- 2.2 MARK UNIT AS SHOWN.
REF.: SLK-08902-82-02 &
SLK-09213-82-03

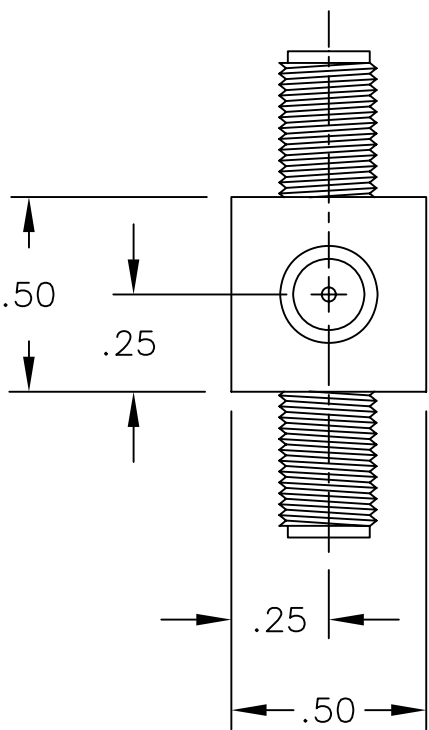

SMA FEMALE CONN.
PER MIL-PRF-39012
(3 PLCS)

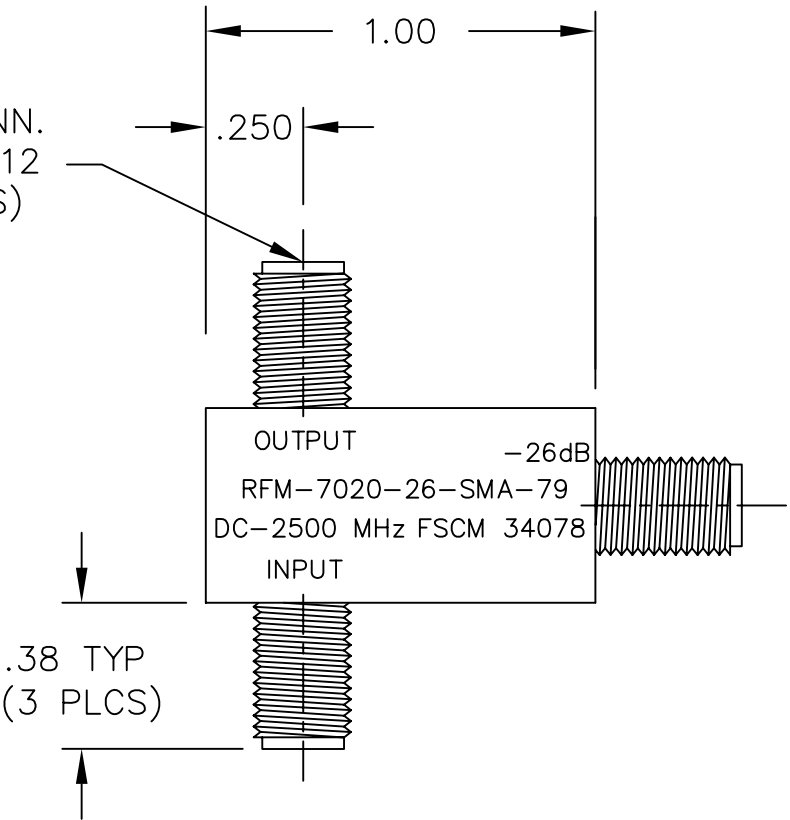

MODEL NUMBER	REV.
RFM-7020-26-SMA-79	A1

REV.	DESCRIPTION	DATE
-	RELEASED	8/6/94
A	ECN 13919	9/12/94
A1	ADDED TITLEBLOCK	7/21/05

BACKSIDE
MARKING

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078		MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE RF SIGNAL SAMPLER	
	DRAWN/DATE A.BEATTY 7/18/94		ENG./DATE P.GOODMAN 8/5/94	
CHECKED/DATE M.HOLLMAN 8/1/94		APPROVED/DATE		
		DRAWING NUMBER RFM-7020-26-SMA-79		
		SCALE: 2=1	SHEET 1 of 1	