



P	LTR	DESCRIPTION	DATE	DWN	APVD
G1		REVISED PER ECO-11-004820	11MAR11	RK	HMR
H		REVISED PER ECO-18-006771	30OCT2018	RS	MZ

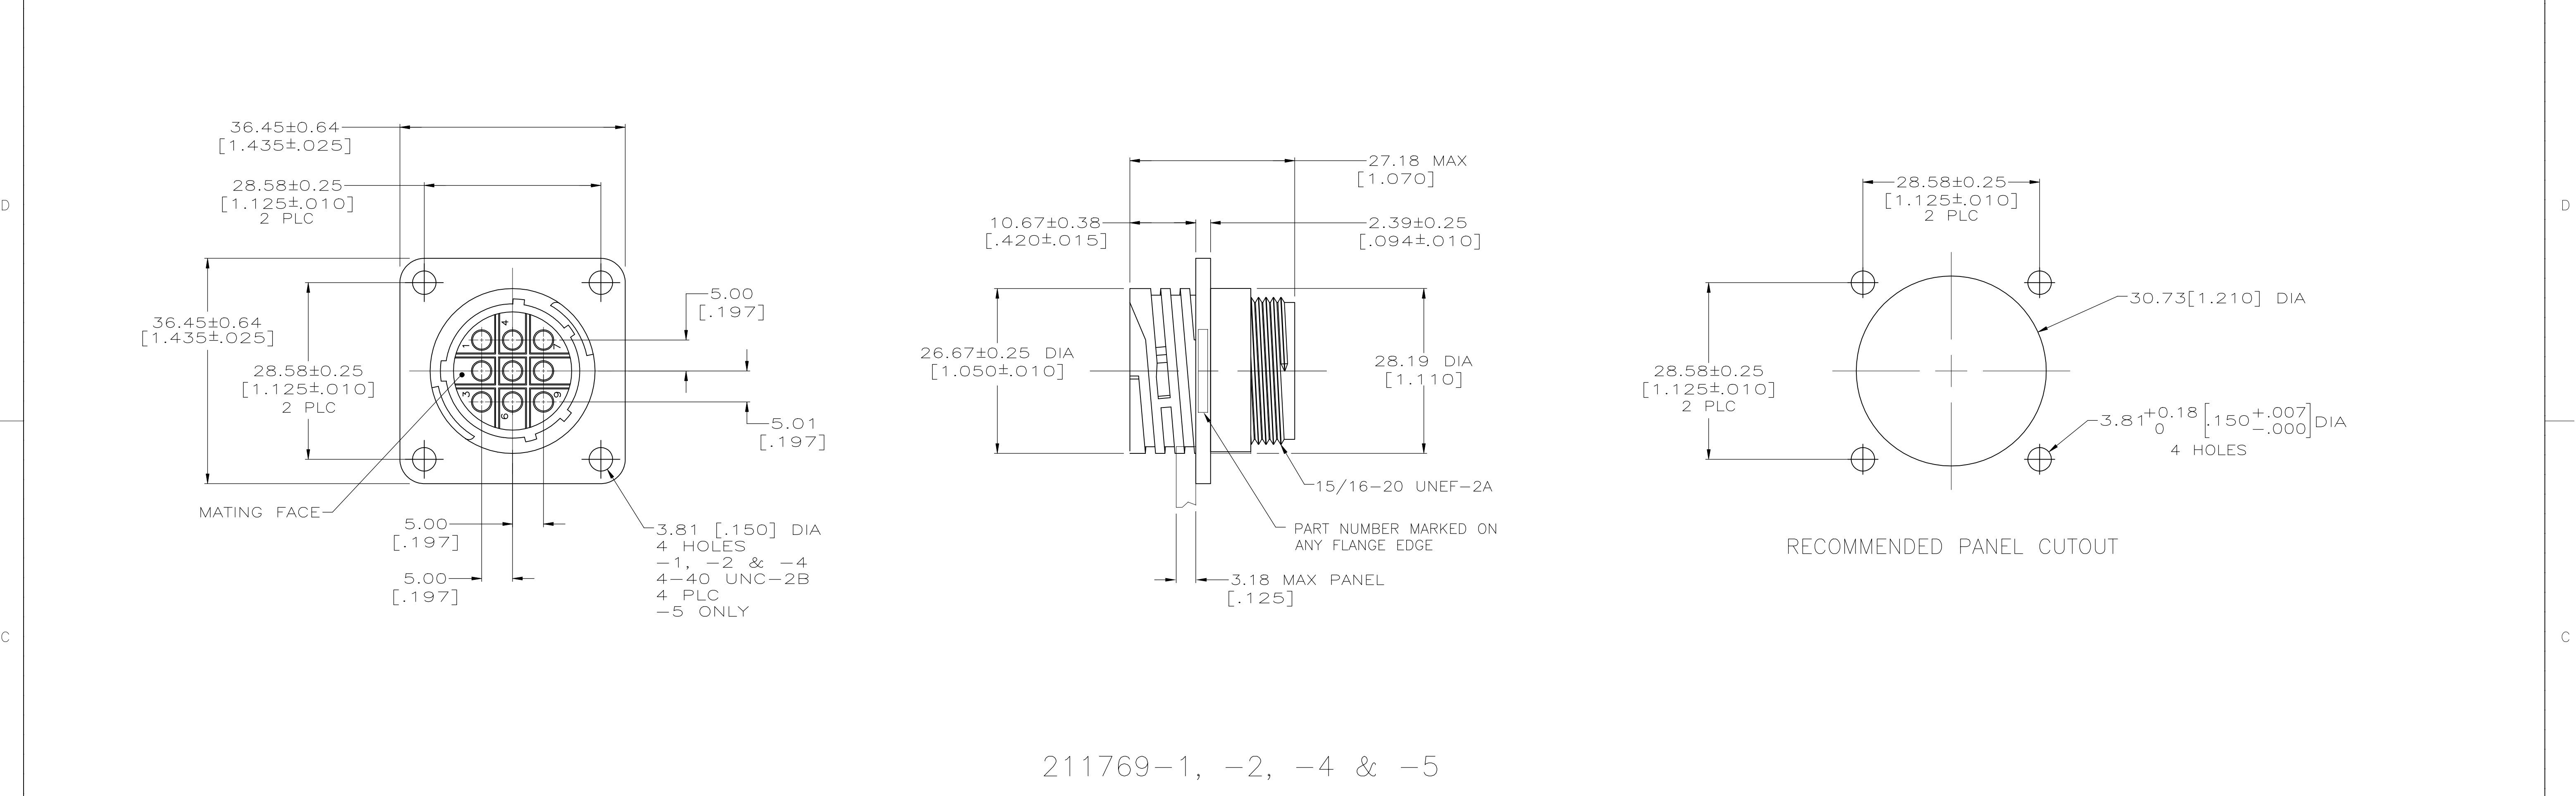

211769-1, -2, -4 & -5

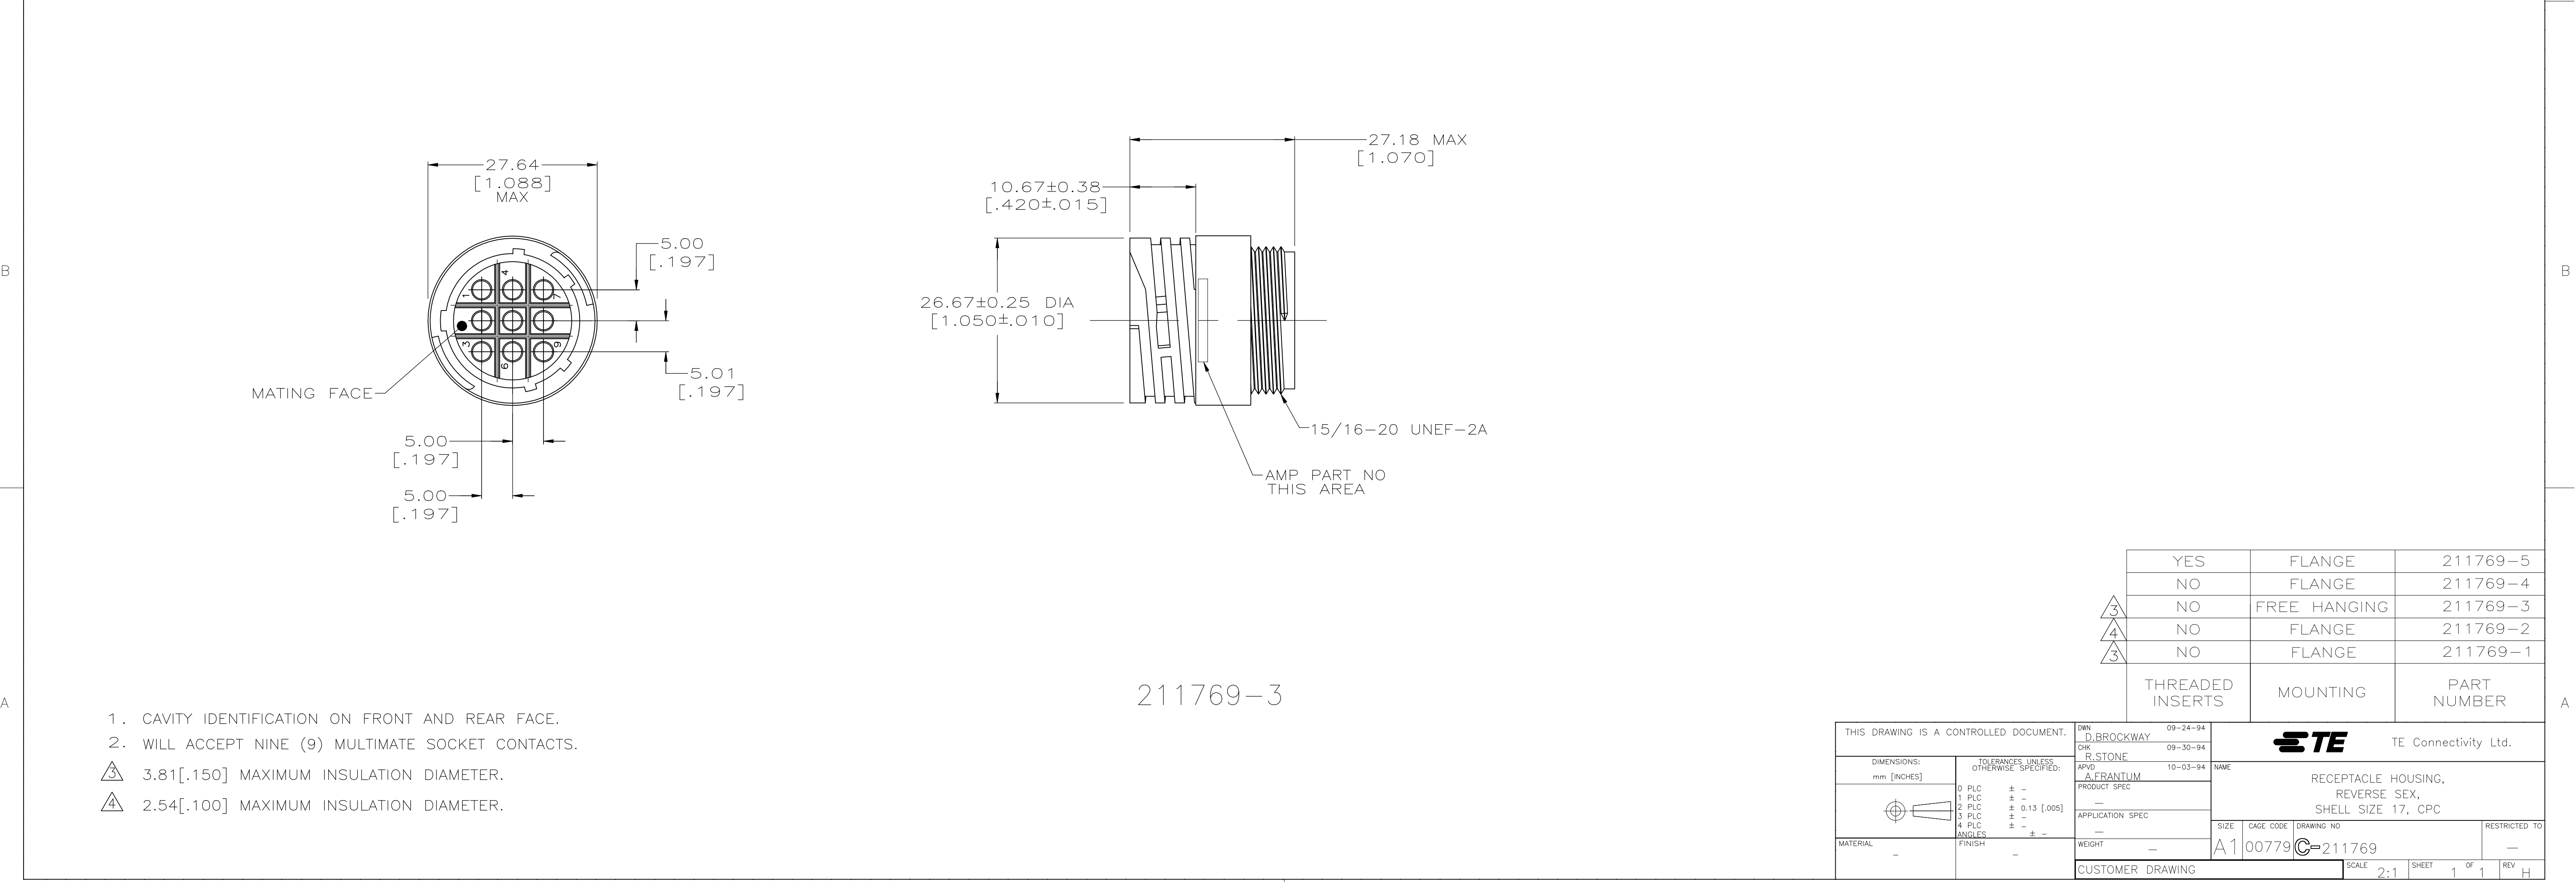

211769-3

1. CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
2. WILL ACCEPT NINE (9) MULTIMATE SOCKET CONTACTS.
3. 3.81[.150] MAXIMUM INSULATION DIAMETER.
4. 2.54[.100] MAXIMUM INSULATION DIAMETER.

YES	FLANGE	211769-5
NO	FLANGE	211769-4
NO	FREE HANGING	211769-3
NO	FLANGE	211769-2
NO	FLANGE	211769-1
THREADED INSERTS	MOUNTING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.BROCKWAY 09-24-94	TE Connectivity Ltd.	
DIMENSIONS: mm [INCHES]		CHK R.STONE 09-30-94	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.FRANTUM 10-03-94	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		SIZE
1 PLC ± -		WEIGHT		CAGE CODE
2 PLC ± 0.13 [005]		CUSTOMER DRAWING		DRAWING NO
3 PLC ± -		SCALE		RESTRICTED TO
4 PLC ± -		2:1		1 OF 1
ANGLES ± -		REV		H