

Bluetooth® Low Energy IoT Development Kit (B-IDK) Getting Started Guide

INTRODUCTION

This document helps you get started with the Bluetooth Low Energy IoT Development Kit (B-IDK). The B-IDK is a comprehensive node-to-cloud and a modular IoT platform that allows development of various BLE based use cases. Along with the hardware and software, the B-IDK includes a mobile app to interact with sensors and actuators.

The B-IDK features RSL10, Industry's lowest power Bluetooth 5 SoC and comprises of a baseboard (BDK-GEVK) and several sensor and actuator daughter cards. For a complete listing of available daughter cards, please visit <https://www.onsemi.com/B-IDK>. The daughter cards connect to the baseboard, via the two PMOD connectors and/or the Arduino connector to enable various use cases.

Scope

This document covers the hardware setup, software architecture, B-IDK documentation and provides instructions on downloading firmware to the board. The details regarding the mobile app and cloud connectivity are not covered in this document.

HARDWARE

- BDK-GEVK – B-IDK Baseboard
- Daughter Cards – Optional
- BDK-DCDC-GEVB – Power Shield For Use With Higher Power Daughter Cards – Optional

Default Configuration

The BDK-GEVK is shipped with the following jumper configuration. As the board supports OBD, there is no need for an external debugger. In case an external debugger is used, connect it to SWD header, J6.

Powering the Board

Multiple options are available to power the BDK-GEVK.

- USB
- Coin Cell (CR2032)
- External AC/DC Adapter plus power shield (BDK-DCDC-GEVB)
- External Supply

When higher power daughter cards (listed below) are attached to the baseboard, external supply either using the power shield or direct is required.

Higher Power Daughter Cards

- D-LED-B-GEVK Dual LED Ballast
- D-STPR-GEVK Dual Stepper Motor Driver
- BLDC-GEVK BLDC Motor Driver



ON Semiconductor®

www.onsemi.com

EVAL BOARD USER'S MANUAL

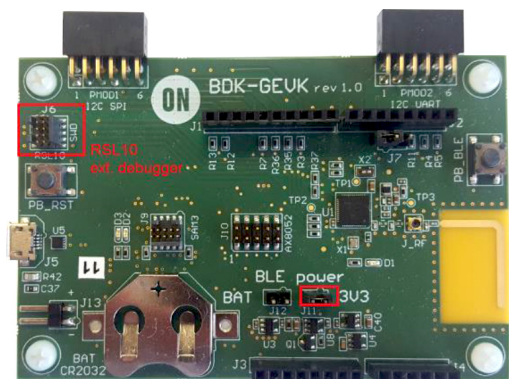


Figure 1. Board Photo

USB

The B-IDK can be powered via the USB port when the use case doesn't need any higher power daughter cards. An example configuration with the baseboard and a couple of sensor boards is shown below.



Coin Cell



Once the firmware is flashed onto the baseboard, a coin cell (CR2032) may be used to power the system. Similar to USB based power supply, this method of powering is for use cases that don't utilize the higher power daughter cards. The jumper configuration must match the below table to allow for various power modes.

Table 1. JUMPERS

J11	J12	Usage
IN	X	Programming and Power over USB
X	IN	After programming. Only RSL10 is powered.
IN	IN	After programming. Both RSL 10 and OBD Microcontroller are powered

External AC/DC Adapter Plus Power Shield (BDK-DCDC-GEVB)

For use cases that utilize higher power daughter cards, an external AC/DC power supply (Ex: SMI24-12-V-P6) plus the power shield (BDK-DCDC-GEVB) are needed to power the system. While the 3.3 V supply to the baseboard is provided by the power shield via the Arduino connector, power cables (Green connector) are required between BDK-DCDC-GEVB and the higher power daughter card. For firmware flashing and debugging, the USB cable may be plugged in simultaneously with this mode as shown below.

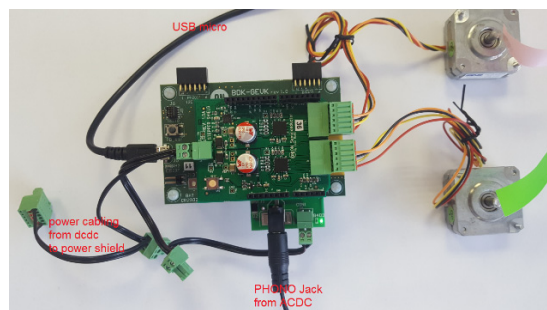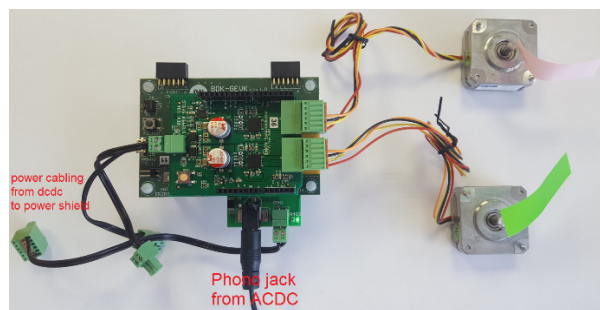

External Supply

The B-IDK can be powered by an external supply via J13. In this mode, the battery cannot be installed. Jumpers J11 and J12 must be installed.

SOFTWARE

The B-IDK software allows for rapid development of various use cases. This section details the prerequisites and detailed steps in downloading firmware onto the baseboard.

Prerequisites

1. Install 64-bit version of Java from <https://www.java.com/en/download/>
2. Install J-Link Version 6.32f or later from <https://www.segger.com/downloads/jlink> (select J-Link software and documentation pack)
3. Download and install “On Semiconductor IDE Installer” from <https://www.onsemi.com/PowerSolutions/product.do?id=RSL10>
 - a. Download the RSL10 SDK Getting Started Guide and RSL10 CMSIS pack under “RSL10 Software Package” from the above site. All of these are highlighted in the picture below. Save the CMSIS pack in a folder, for example, C:\cmsis_packs



4. Download the B-IDK CMSIS pack from <https://www.onsemi.com/B-IDK> and save it in the same folder as the RSL10 CMSIS pack (see 3.a above)
5. CMSIS pack at item 4. is dependent on ARM CMSIS pack as well. Please install ARM CMSIS pack 5.5.1 or higher after download from: https://github.com/ARM-software/CMSIS_5/releases
6. CMSIS pack at item 4. is also dependent on ARM CMSIS – FreeRTOS version 10.2.0 or higher for users exposed to design the code under FreeRTOS with RSL10: <https://github.com/ARM-software/CMSIS-FreeRTOS/releases>


The next section provides details on importing the downloaded CMSIS packs into the SDK.

Importing CMSIS Packages

1. Launch the RSL10 SDK ON Semiconductor IDE


NOTE: Please import RSL10 CMSIS pack first as the B-IDK CMSIS pack (step 4 in the Prerequisites section) depends on the RSL10.

2. Refer to Chapter 3 of RSL10 SDK Getting Started Guide (step 3.a) for step-by-step instructions on importing the CMSIS packs.
3. Once all packs are successfully imported, they can be viewed in the CMSIS pack manager perspective as shown below.

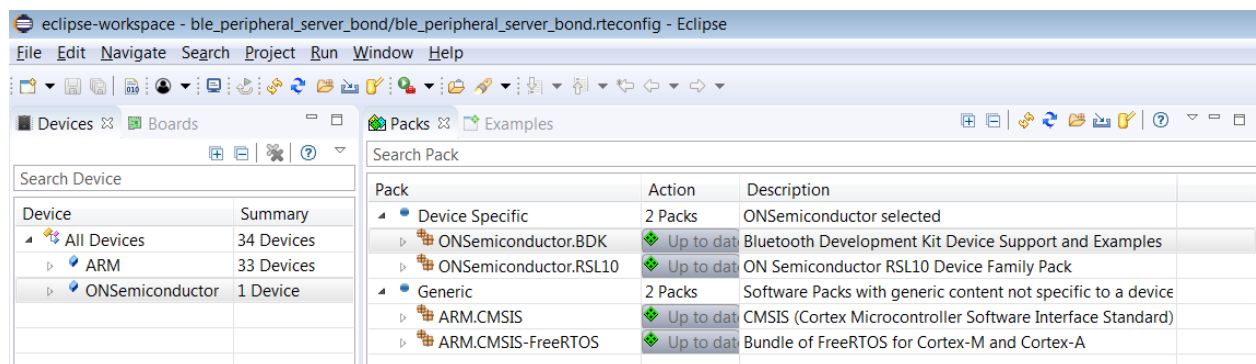


Compiling and Flashing


1. Choose an example (for example, pr_shield_example) to flash by copying it to the workspace.

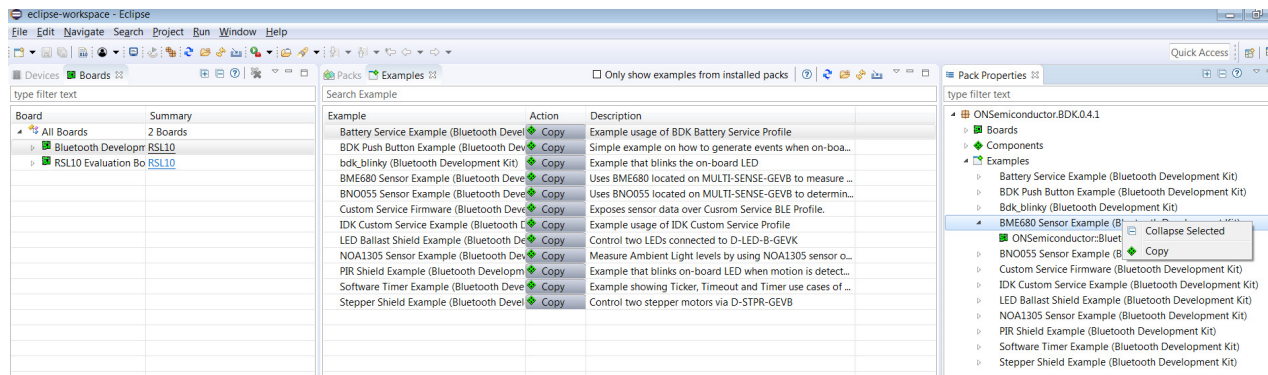

NOTE: Once the example is copied, it can be viewed under Project Explorer. All source files including main are located in the src folder.

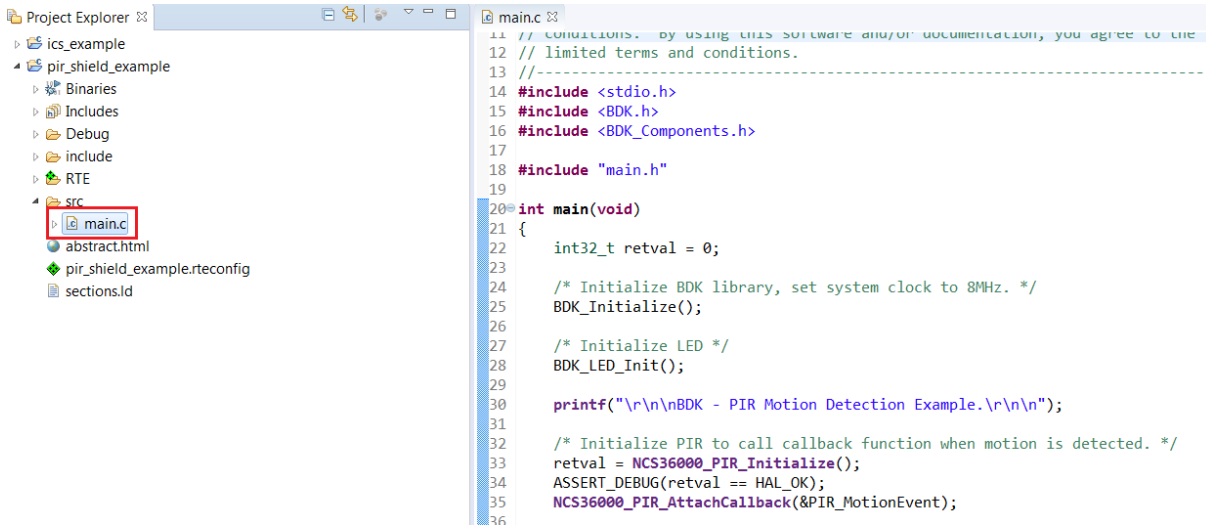


2. Right click and build the project. This creates binaries to be flashed to BDK–GEVK.

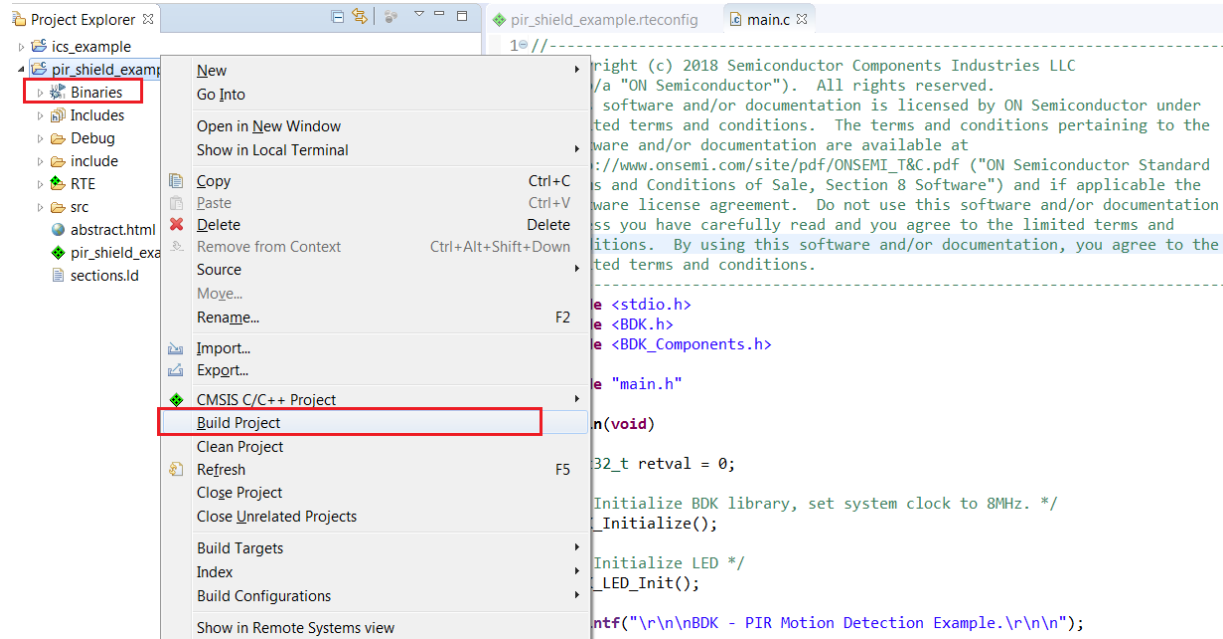


NOTE: If the binaries are not seen, press F5 (refresh).

3. Once the build is done, the code is ready to be flashed to the BDK–GEVK. Select the project (pir_shield_example), and go to the debug configurations as shown below.

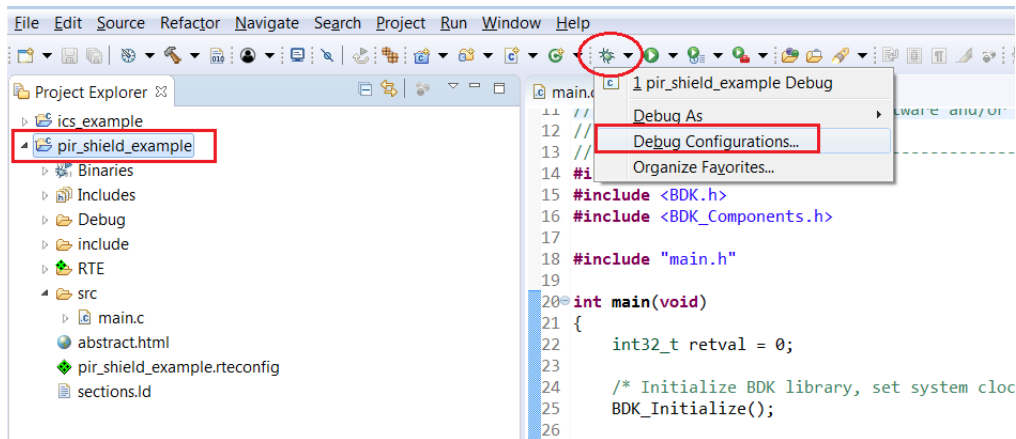


4. Double click **GDB Segger J-Link Debugging** to create the debug configuration for the selected example.

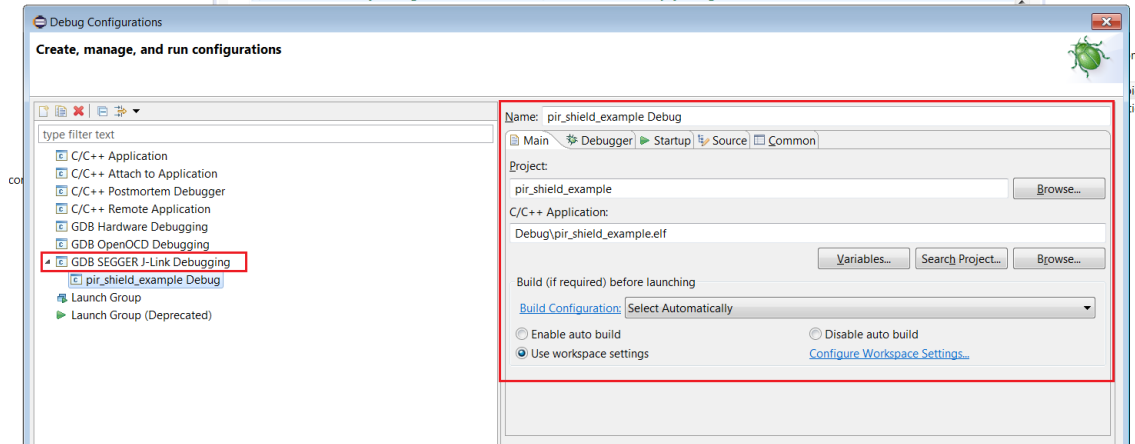


NOTE: The debug configuration for the selected example is automatically saved and there's no need to re-create it.

5. On the **Debugger** tab, set RSL10 as the device name. Click **Debug** to launch the code.

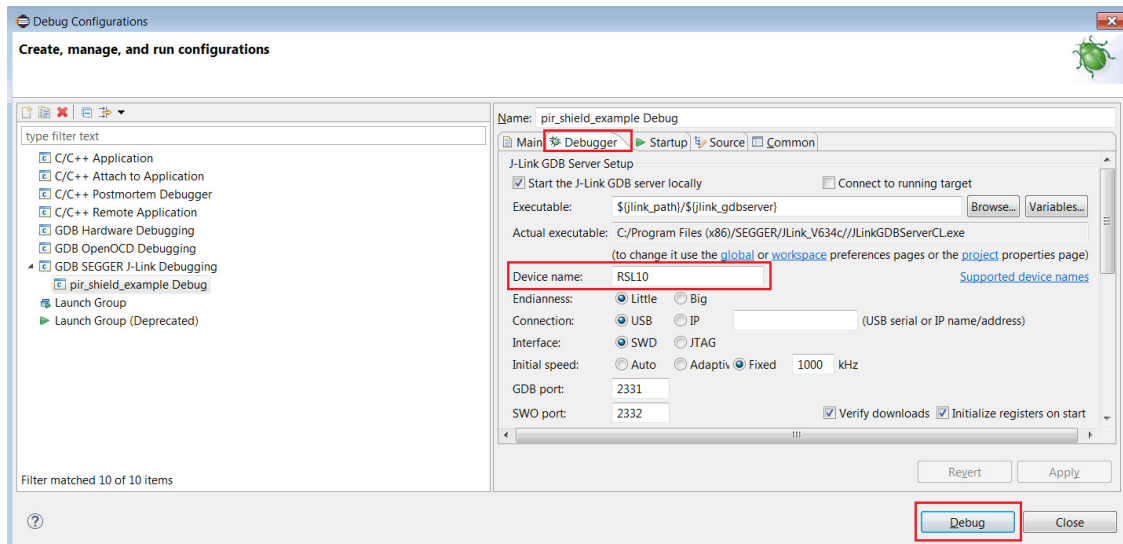


6. For application debugging, confirm perspective switch by clicking Yes.

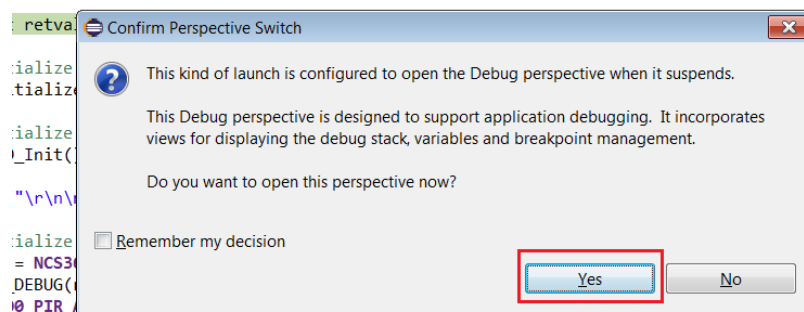


7. The debug session is now launched. Click Resume (F8) to start the target CPU.

Compiling and Flashing


1. Choose an example (for example, pr_shield_example) to flash by copying it to the workspace.

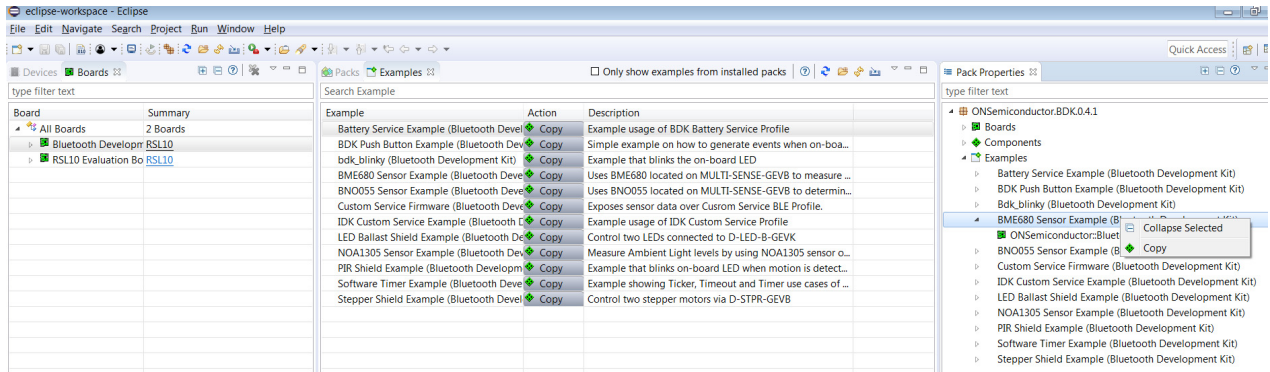

NOTE: Once the example is copied, it can be viewed under Project Explorer. All source files including main are located in the src folder.

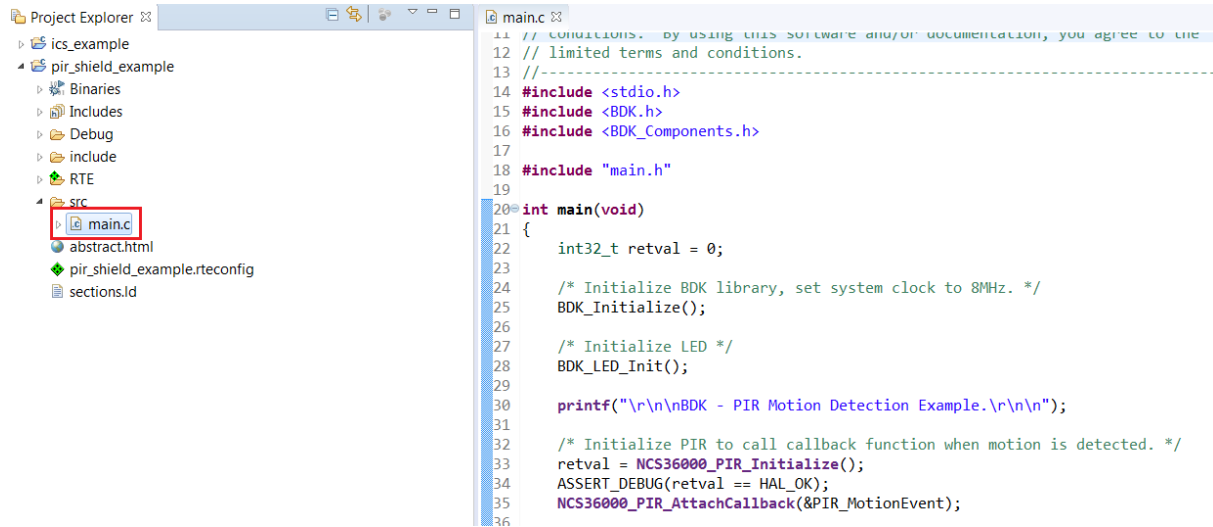


2. Right click and build the project. This creates binaries to be flashed to BDK-GEVK.

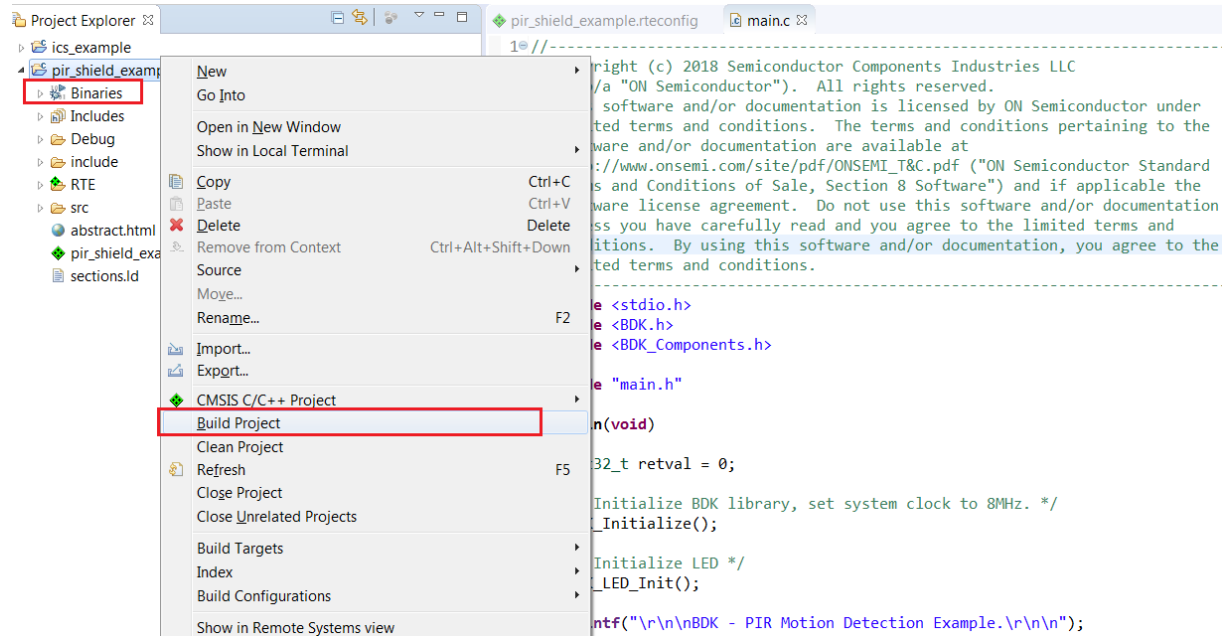


NOTE: If the binaries are not seen, press F5 (refresh).

3. Once the build is done, the code is ready to be flashed to the BDK-GEVK. Select the project (`pir_shield_example`), and go to debug configurations as shown below.

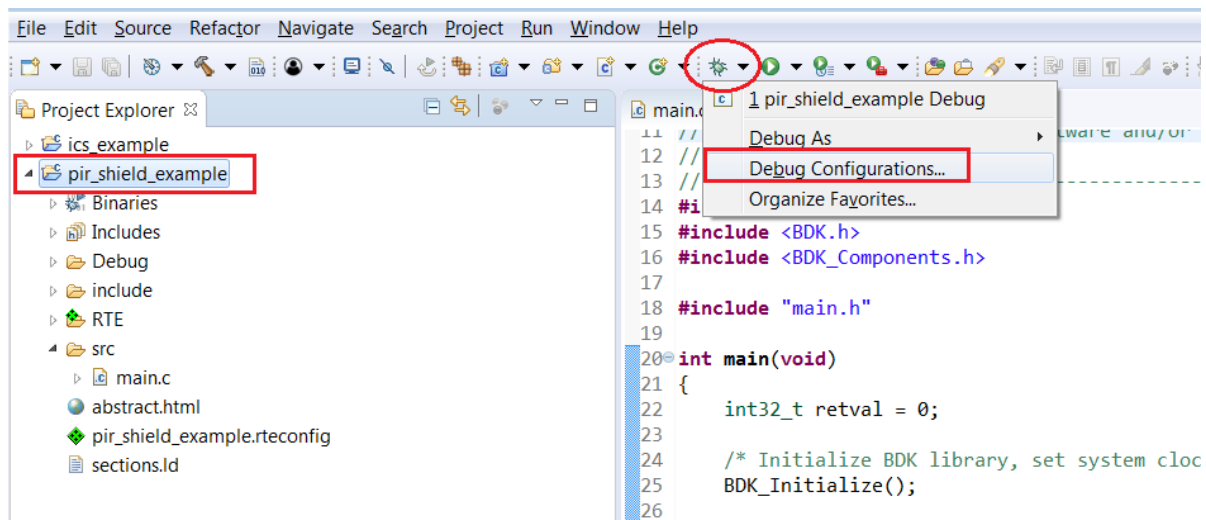


4. Double click GDB Segger J-Link Debugging to create the debug configuration for the selected example.

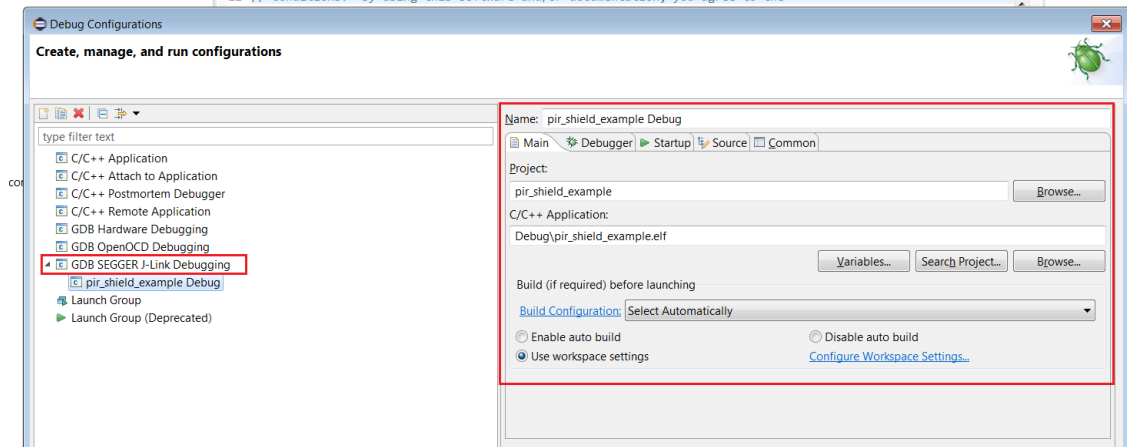


NOTE: The debug configuration for the selected example is automatically saved and there's no need to re-create it.


5. On the Debugger tab, set RSL10 as the device name. Click Debug to launch the code.

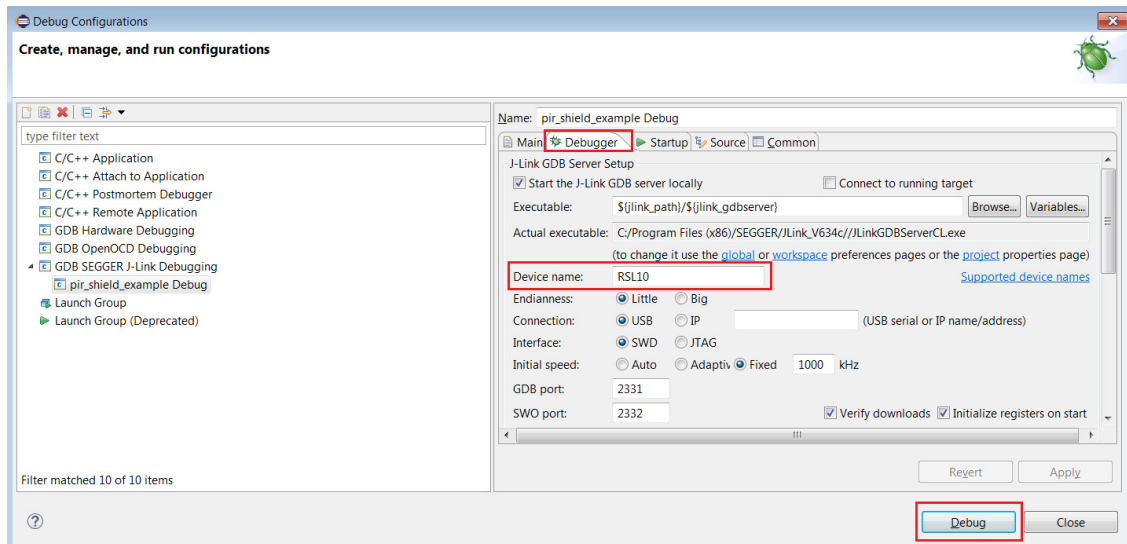

6. For application debugging, confirm perspective switch by clicking Yes.

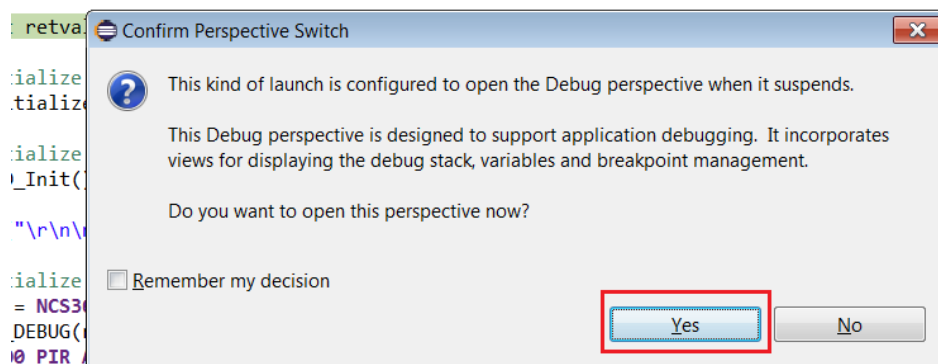

7. The debug session is now launched. Click Resume (F8) to start the target CPU.

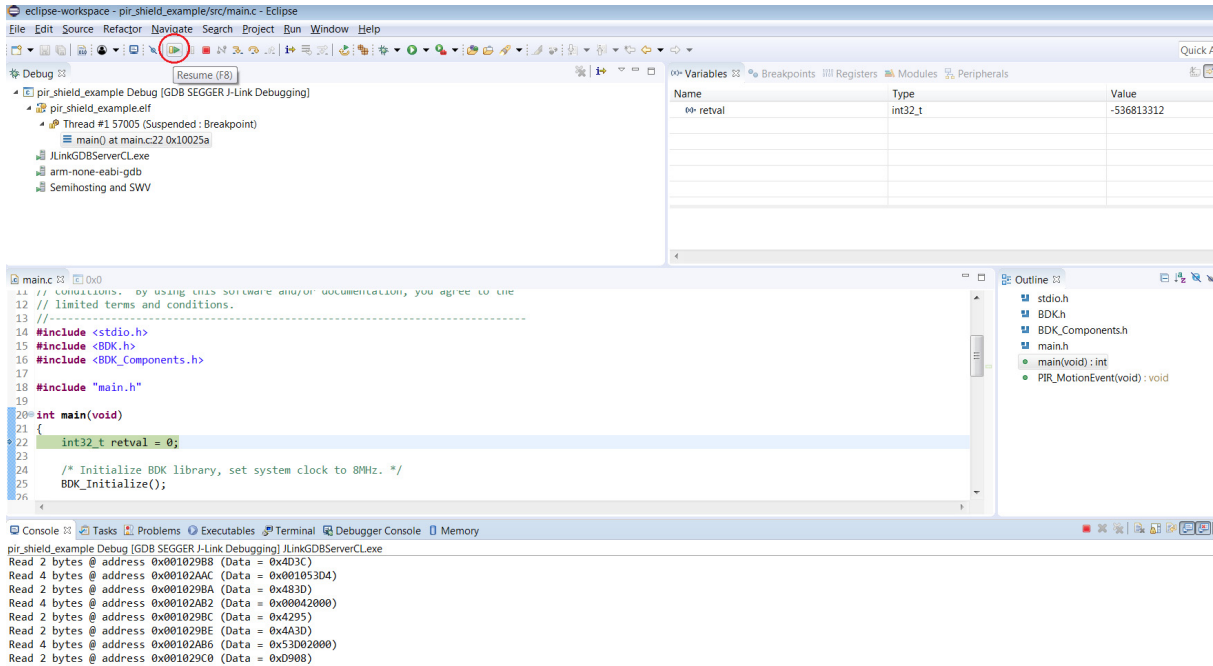

Logging/Debugging


The following options are available to log/debug the downloaded firmware:

- Eclipse RTT Console
- J-Link RTT
- AX8052F100 UART-SPI bridge



This section provides instructions for each of the above options.

Using Eclipse Console

1. Click the Open a Terminal Icon

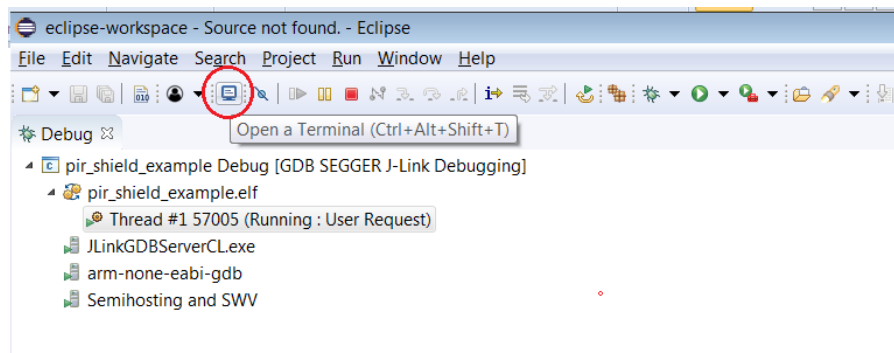


2. Enter the values shown below and launch the session. The incoming events are printed on the terminal window.

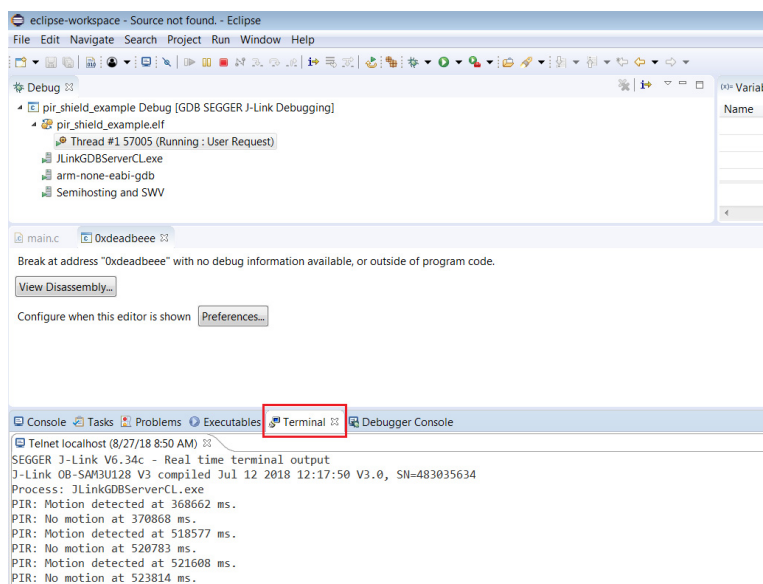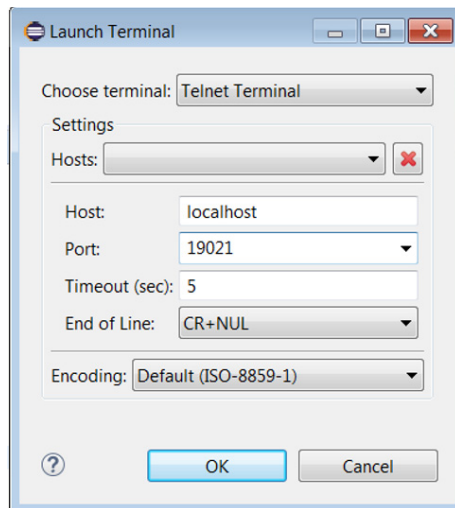


Using Eclipse Serial Console via UART–SPI Bridge.

When you do not want to use the Segger RTT viewer as serial console, the BDK–GEVK board is equipped with UART–SPI uC AX8052F100 flashed with special firmware, taking care of the entire serial communication with values returned on Terminal.


3. Click on the example's rteconfig file and choose under *Device/BDK/Output redirection*, SPI Bridge AXEM. Save, compile and flash the whole project.

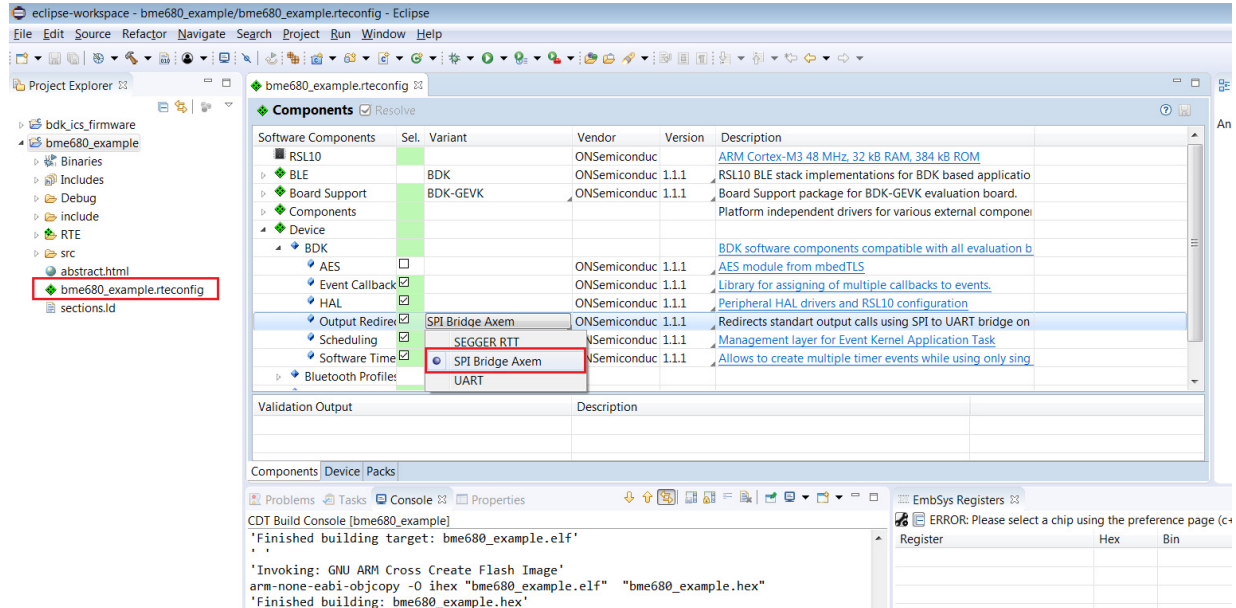


4. When the project runs, Click the **Open a Terminal Icon**.

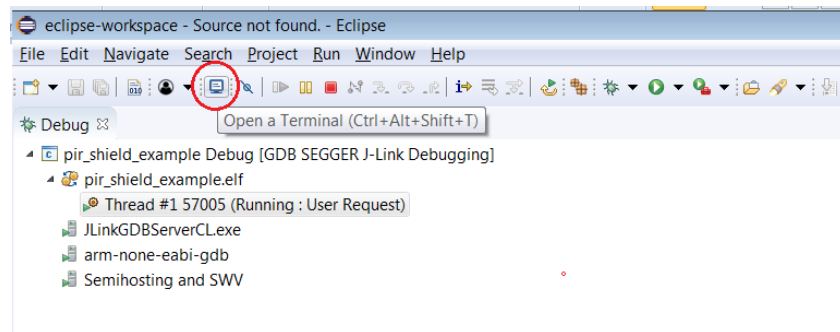


5. Enter the appropriate COM port as shown below, and launch the session. The incoming events are entered on the terminal window.

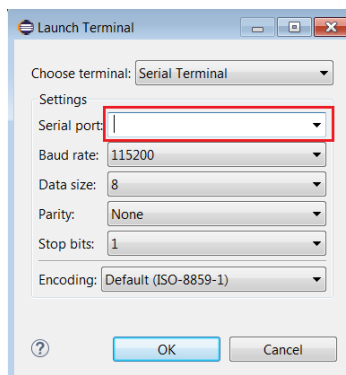

EVBUM2589

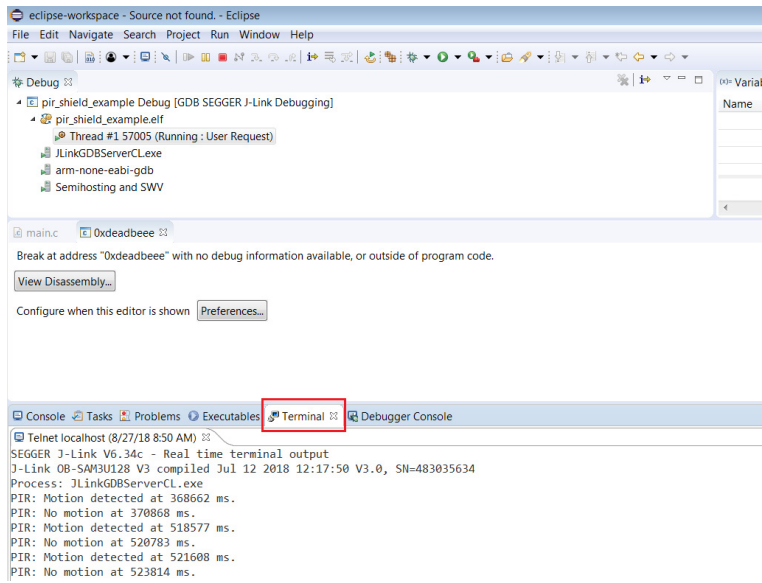


NOTE: You may reset (PB_RST) the BDK-GEVK (shown below) to launch the RTT terminal without needing to launch Eclipse.

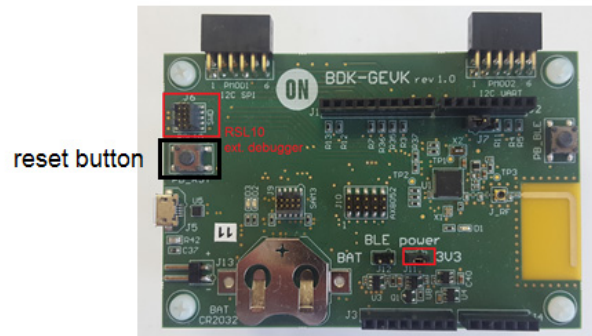


Using J-Link RTT




6. After step 14 is done, open J-Link RTT viewer (should be installed when J-Link software package was installed per Step 2).

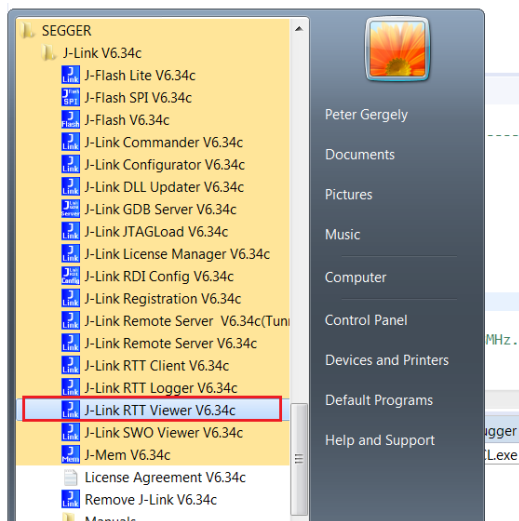


7. Select USB and click OK.

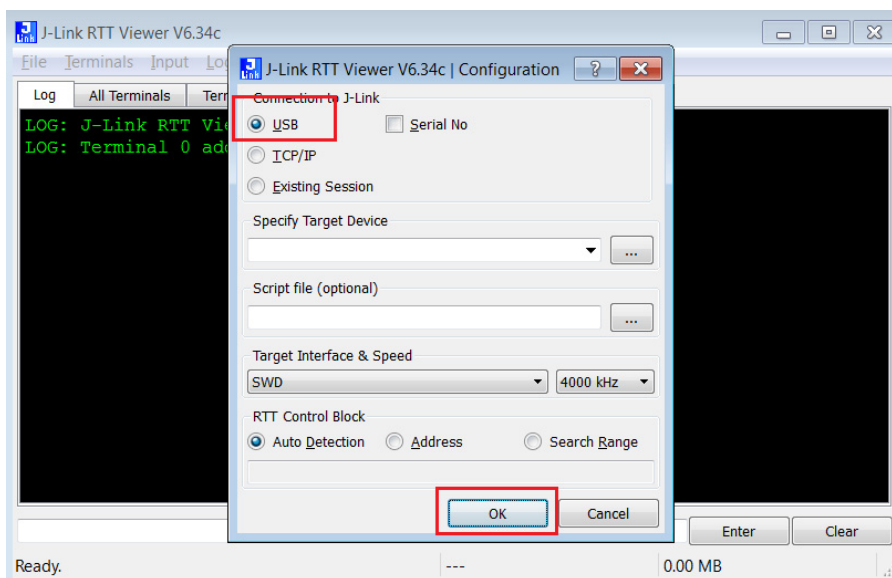


8. RTT prompts you to select the appropriate microcontroller. Select RSL10 and click OK. The serial terminal is ready to use and the events from RSL10 can be observed by clicking the All Terminals Window.

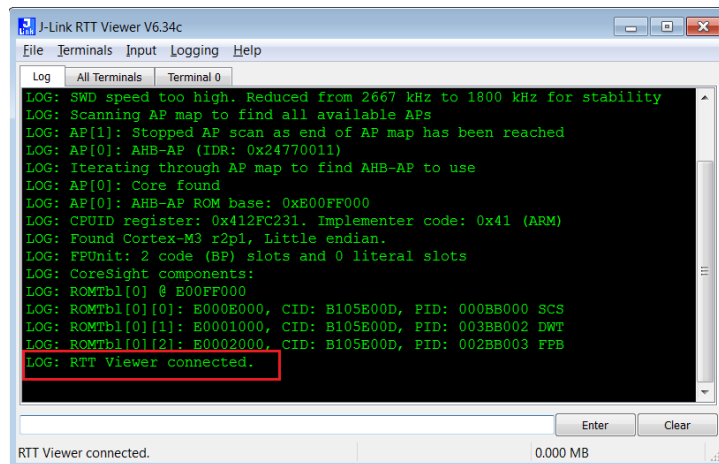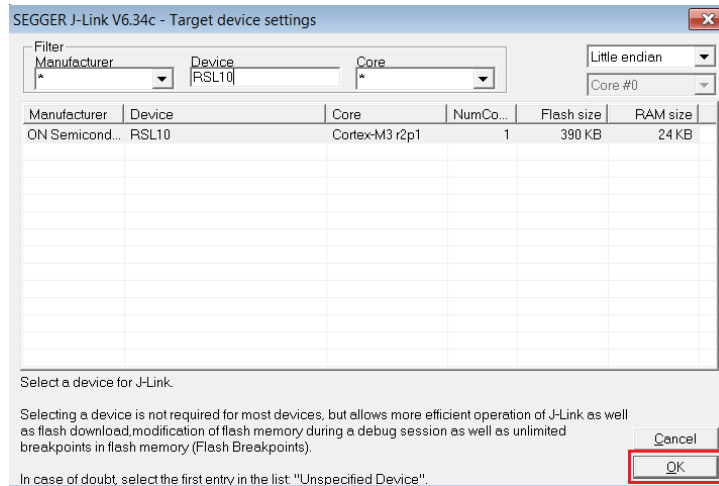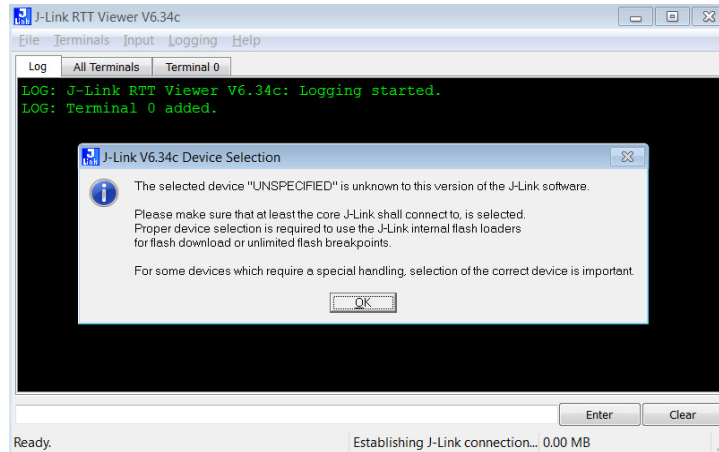

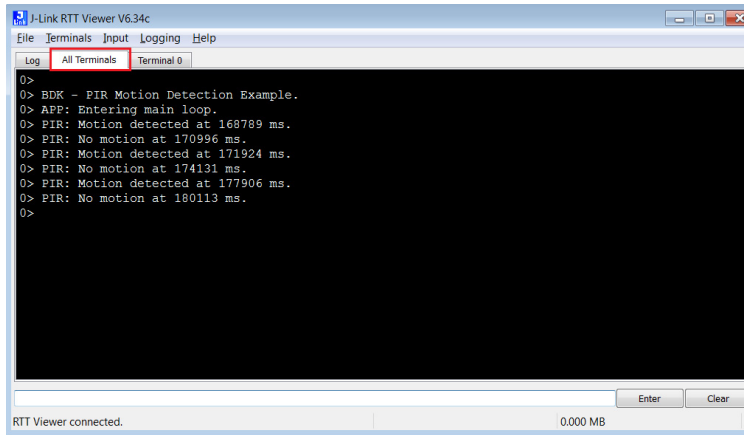


NOTE: You may reset (PB_RST) the BDK-GEVK (shown below) to launch RTT terminal without needing to launch Eclipse.

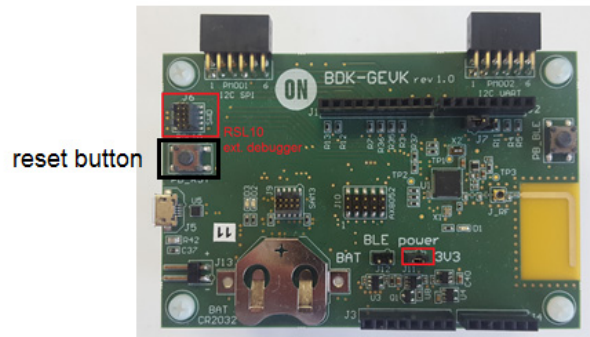


Using Eclipse Serial Console via UART-SPI Bridge

The BDK-GEVK board is equipped with UART-SPI microcontroller AX8052F100 flashed with special firmware, to enable serial communication with values returned to Terminal.



- Click on example's rteconfig file and choose "SPI Bridge AXEM" under *Device/BDK/Output redirection*. Save, compile and flash the whole project.

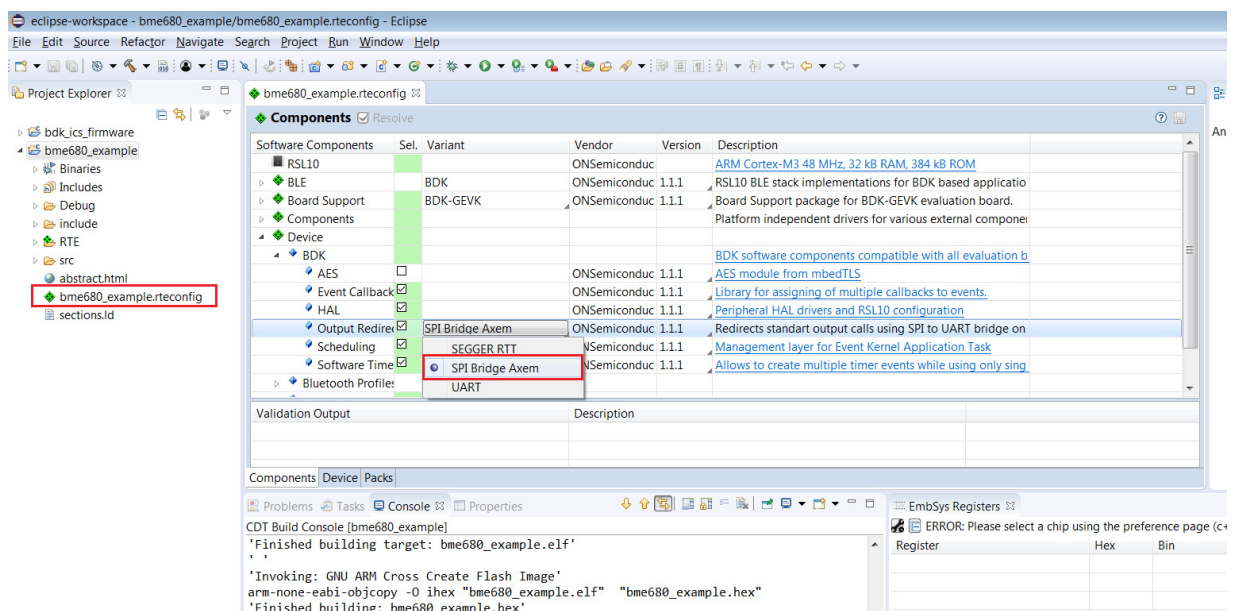

10. When the project runs, Click the Open a Terminal Icon.

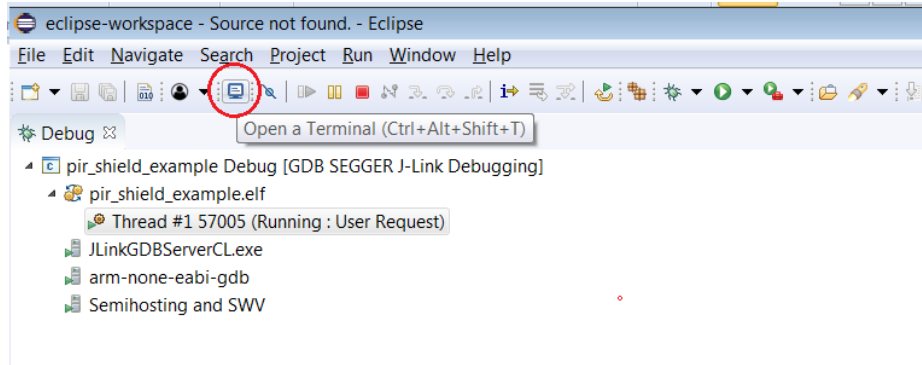


11. Enter the appropriate COM port as shown below and launch the session. The incoming events are printed on the terminal window.

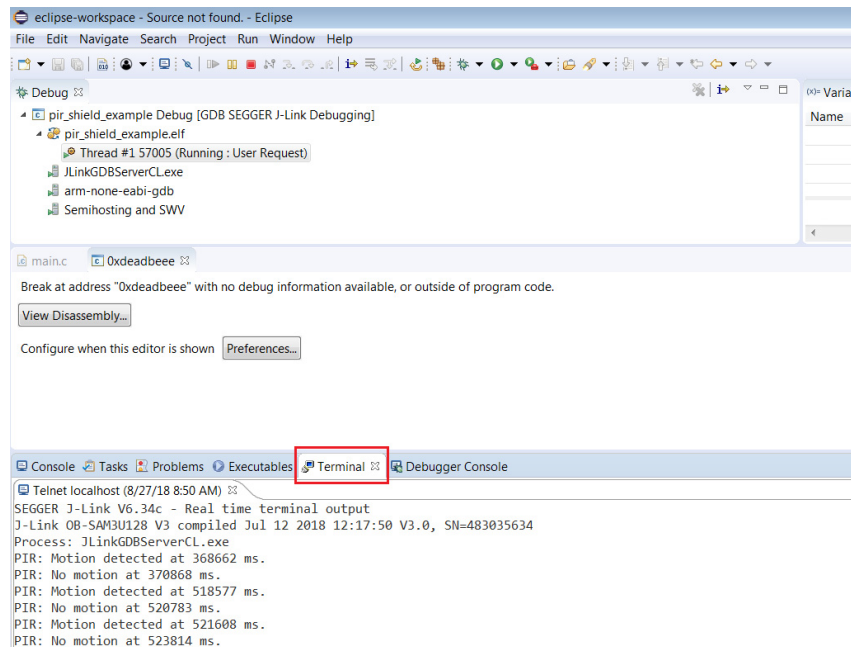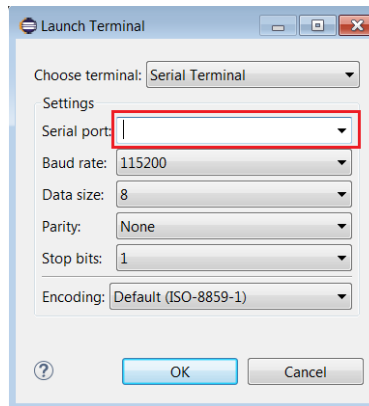

SOFTWARE ORGANIZATION

For users modifying the example code and building new projects, the following sections detail the B-IDK software organization. The stack overview is shown below.

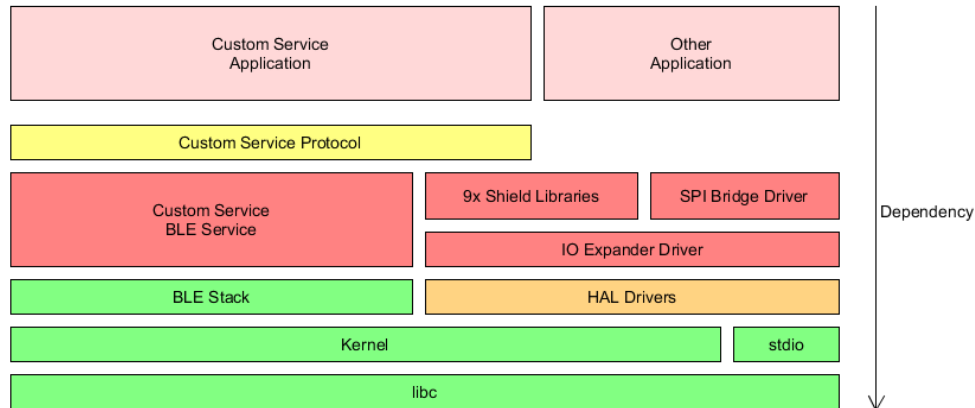

B-IDK CMSIS Software Organization

CMSIS pack and the associated software components handle multiple evaluation boards as different bundles of the standardized Board Support Cclass.


- This bundle shows only components supported by ON Semiconductor for a given board
- No confusing component variants

Common libraries and HAL are in a separate group within the Device class

Bundle	Cclass	Cgroup	Csub	Cvariant	Description	
BDK-GEVK	Board Support	Libraries	LED		Board support package for BDK-GEVK evaluation board	
			Button		Board specific libraries	
			PCA9655E		On-board LED support	
		IDK Shields	PIR-GEVB		On-board push button support	
			ALS-GEVB		16-bit I2C IO Expander library	
			MULTI-SENSE-GEVB	rev 2.1	Support for Arduino / PMOD extension boards	
			BLDC-GEVK		PIR Motion detection using NCS36000	
			D-LED-B-GEVK		Measure Ambient light levels using NOA1305 ambient light sensor	
		D-STPR-GEVK		Combines 3 sensors: BME680, BNO055, NOA1305		
		ICS Protocol	System Node		Libraries that allow connected BLE devices to take control over sensors / actuators using ICS Service.	
			PIR Node		Protocol implementation and sytem node used by other sensor / actuator nodes.	
			ALS Node		Exposes motion data provided by NCS36000 from PIR-GEVB	
			ENV Node		Exposes ambient light levels measured by NOA1305 from ALS-GEVB	
			AO Node		Exposes environmental data measured by BME680 from MULTI-SENSE-GEVB	
			STPR Node		Exposes absolute orientation measured by BNO055 from MULTI-SENSE-GEVB	
LEDB Node			Allows remote control of two stepper motors connected to D-STPR-GEVB.			
BLDC Node			Allows remote control of two power LEDs connected to D-LED-B-GEVK			
Components	LED Driver	NCV78763		Allows to remote control BLDC motor connected to BLDC-GEVB.		
				Platform independent software drivers for controlling of various external IC.		
	Ambient Light Sensor	NOA1305		Dual LED Driver and Power Ballast, for Automotive Front Lighting, 1.6 A, 2nd Generation		
				Ambient Light Sensor with I2C Interface and DarkCurrent Compensation		
	Motor Driver	AMIS-3054		Micro-stepping stepper motor driver with SPI interface for bipolar stepper motors		
		LV8907UW		Sensor-less Three-phaseBrushless DC MotorController, with GateDrivers, for Automotive		
	Environmental Sensor	bme680		Low power gas, pressure, temperature & humidity sensor		
Motion sensor	bno055		Intelligent 9-axis absolute orientation sensor			
	Touch Sensor	LC717A00AR		Capacitance-Digital-Converter for Electrostatic Capacitive Touch Sensors		
BDK	Device	BDK	HAL		RSL10 Peripheral abstraction layers for BDK applications.	
			Scheduling		Event Kernel wrapper for BDK applications.	
			Software Timer		Allows to create multiple timer events while using only single hardware timer.	
			Event Callback		Library for executing multiple event handlers when an event occurs.	
			Output Redirection	SEGGER RTT	Redirects standard library output calls (printf, ...) to specified channel	
				UART	Output is transmitted using UART peripheral	
		BLE	Peripheral Server	AES		Output is transmitted over SWD using the on-board or external J-LINK debug probe
BDK	BLE	Peripheral Server	Battery Service		Exposes current battery level to connected client and application.	
			ICS Service		IDK Custom Service used to transmit sensor data using ICS Protocol library.	
			Peripheral Server		BLE Peripheral Server implementation for BDK applications.	


Board Support

- Libraries to support BDK-GEVK, GPIO Expander, Various daughter cards and custom protocol (required for the mobile app)

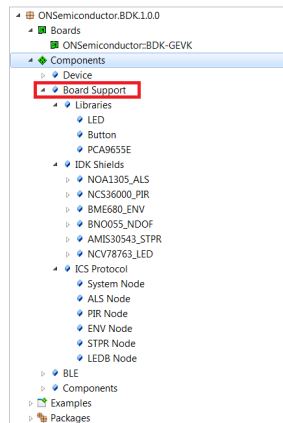


Components

- Libraries attached to board support




Device

- Abstraction layers for interfaces, timers, AES, serial re-direction, etc.




BLE

- Peripheral Server Support



CONFIGURATION SETUP

System settings can be configured directly from within the CMSIS pack. Each example is equipped with basic system configuration that covers three main categories. These are accessible in the RTE/BDK folder within the project. Each system configuration starts with “RTE_”. As shown below, opening the RTE_... header files using the CMSIS configuration wizard (right click on the header file), displays the configuration table. Various application specific parameters can be set. This allows pre-configuration of RSL10 without the need for explicit programming.

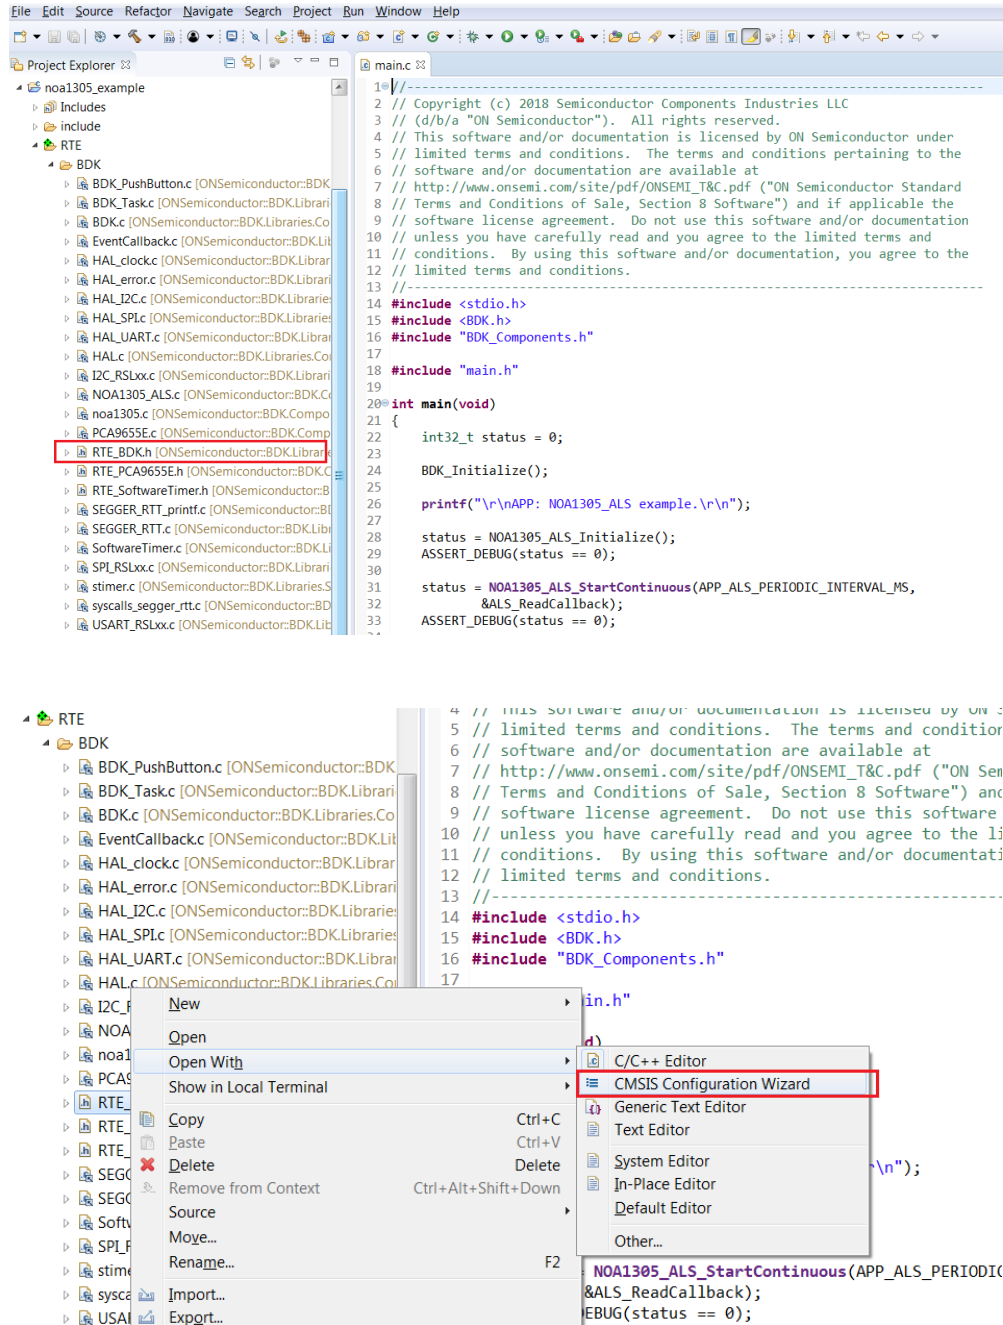

A brief description on the header files is given below.

RTE_BDK.h

Parameters such as system clock frequency and the board that feature RSL10 (default set to BDK-GEVK), etc. can be set. Descriptions of each of these parameters are also provided.

Option	Value
SYSCLK Frequency	8 MHz
APP Task Event Kernel message handler count	48 MHz
HAL Pinmap Configuration	24 MHz
Board selection	16 MHz
Custom Pinmap	8 MHz
USART0_TX Pin	2
USART0_RX Pin	4
SPI0_MOSI Pin	7
SPI0_MISO Pin	10
SPI0_SSEL Pin	5
SPI0_SCLK Pin	6
I2C0_SCL Pin	1
SPI1_SDA Pin	0
I2C0 DIO Low Pass Filter	ENABLED
I2C0 DIO Drive Strength	6X
I2C0 DIO Pull Selection	No pull
LED Pin	14
Button Pin	15

SYSCLK Frequency
Frequency that the Cortex M3 core will be running at.
Other clocks will be chosen based on selected system clock.

RTE_Software_Timer.h

Various timers (4) supported by RSL10 can be configured by invoking the CMSIS configuration wizard on this header file. Timer 1 is used for B-IDK components.

Option	Value
Software Timer Configuration	
Timer resolution [us]	100
Hardware Timer Select	TIMER1

Hardware Timer Select
Which General Purpose Timer of RSL10 to use for Software Timer functionality.
Default: TIMER1 (This value will not collide with other BDK components)

RTE_PCA9655.h

PCA9655 is the GPIO expander chip assembled on most daughter cards to expand interface functionality. Parameters related to this chip can be set here.

Option	Value
Enable PCA9655E shared interrupts	☒
Interrupt signal DIO Pad	13
DIO Interrupt Source	0
EventCallback event ID	1234

RTE_x.h

In addition to configuring system settings, all the supported daughter cards' parameters can be configured directly using the configuration wizard, without the need for programming. Once the parameters are changed per the application requirements, saving, rebuilding and flashing the project will let the new parameters take effect. Examples for the stepper and LED ballast daughter cards are shown below. Other daughter cards can be configured in a similar fashion.

RTE_AMIS30543_STPR.h

CMSIS Configuration Wizard

Option	Value
Stepper Shield Left Channel	
Step Mode	1 / 4 Micro - Step
Coil Peak Current	245 mA
Direction Of Rotation	CW motion
NXT Edge Trigger	Rising Edge
Turn On / Off Slopes of Motor Driver	Very Fast
Speed Load Angle Transparency Bit	SLA is not transparent
Speed Load Angle Gain	0.5
Enables doubling of the PWM frequency	☐
Enables jittery PWM	☐
Steps Per Revolution	200
Stepper Shield Right Channel	
Step Mode	1 / 4 Micro - Step
Coil Peak Current	1 / 32 Micro - Step
Direction Of Rotation	1 / 128 Micro - Step
NXT Edge Trigger	1 / 64 Micro - Step
Turn On / Off Slopes of Motor Driver	Compensated Full Step, 2 phase on
Speed Load Angle Transparency Bit	Compensated Full Step, 1 phase on
Speed Load Angle Gain	1 / 16 Micro - Step
Enables doubling of the PWM frequency	1 / 8 Micro - Step
Enables jittery PWM	☒ 1 / 4 Micro - Step
Steps Per Revolution	Compensated Half Step
	Uncompensated Half Step
	Uncompensated Full Step

Step Mode
Default: 1 / 4 Micro - Step (for motors provided with Stepper shield)

RTE_NCV78763_LED.h

CMSIS Configuration Wizard


Option	Value
Enable Booster	☒
Booster PWM generation	Internal
Booster PWM Frequency	242 kHz
Booster Clock Inversion	☐
Booster Slope Compensation	10 mV / us
Booster Error Amplifier Gain [Siemens]	30 uS
Booster Overvoltage Shutdown	5.8 V
Booster Overvoltage Reactivation	-1 V
Booster Gate Voltage Threshold	0.4 V
Booster Minimum Off Time	115 ns
Booster Minimum On Time	150 ns
Booster Regulation Setpoint Voltage	45.0 V
Booster Current Limitation Peak Value	100 mV
Activate VBOOST_AUX_SUPPLY	☐
Booster Skip Clock Cycles	Disabled
Enable Buck Regulator Channel 1	☒
D-LED-B-GEVK Channel 1 Peak current [m]	252
D-LED-B-GEVK Channel 1 Average current	140
Enables the offset compensation for buck	☐
Comparator Threshold Voltage	0
Tunes the Toff x VLED value for channel 1	0
> Overcurrent Settings	
Enable Buck Regulator Channel 2	☒
General Settings	
Thermal warning threshold	0
LED sampling duration selection	88

Booster Overvoltage Reactivation
Defines the hysteresis for the reactivation once the overvoltage shutdown is triggered.
Default: -1 V for D-LED-B-GEVK

Source Editor CMSIS Configuration Wizard

DOCUMENTATION

Detailed documentation of all functions, code, APIs, HALs is part of the CMSIS package. Every use case (for a particular daughter card, service, etc.) copied into the workspace has its own manual with key description in the abstract.html page. URL Information and orderable part numbers are also provided as shown below.

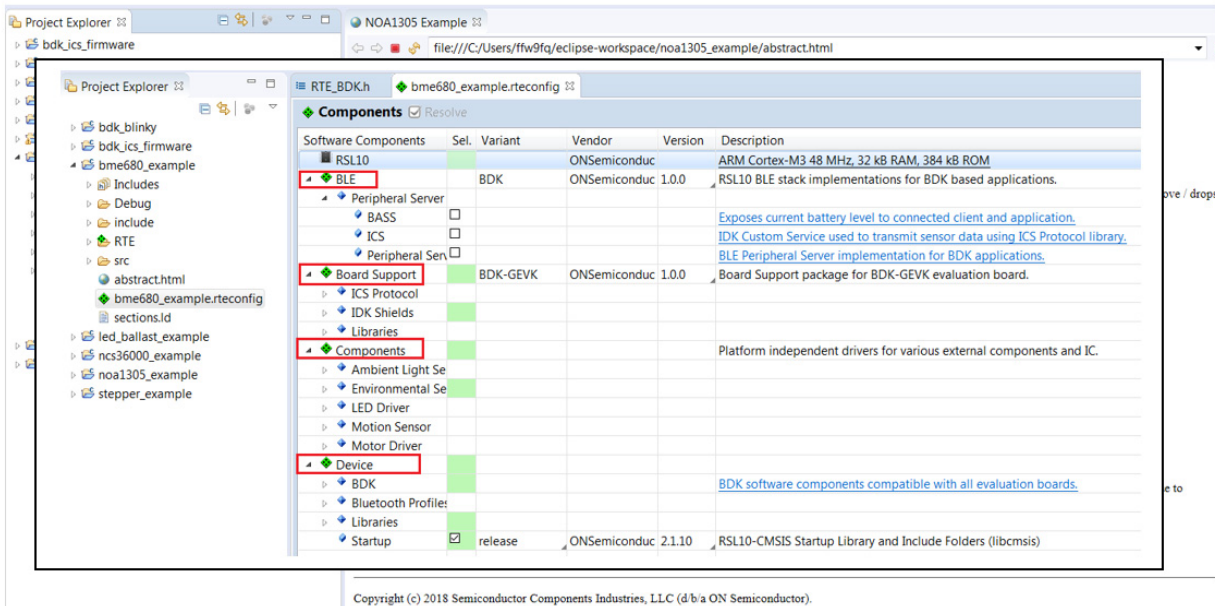

*.rteconfig

The *.rteconfig file lists the software components within the CMSIS pack as described in the B_IDK CMSIS Software Organization section. To access the components, double click *.rteconfig file. Extensive help is provided under the description tab.

Components ☒ Resolve					
Software Components	Sel.	Variant	Vendor	Version	Description
RSL10			ON Semiconductor		ARM Cortex-M3 48 MHz, 32 kB RAM, 384 kB ROM
BLE		BDK	ON Semiconductor	1.0.0	RSL10 BLE stack implementations for BDK based applications.
Peripheral Server					
BASS	☐				Exposes current battery level to connected client and application.
ICS	☐				IDK Custom Service used to transmit sensor data using ICS Protocol library.
Peripheral Serv	☐				BLE Peripheral Server implementation for BDK applications.
Board Support		BDK-GEVK	ON Semiconductor	1.0.0	Board Support package for BDK-GEVK evaluation board.
ICS Protocol					
IDK Shields					
AMIS30543_ST	☐	D-STPR-GEVK			Control two stepper motors connected to D-STPR-GEVK using AMIS-30543 motor driver.
BME680_ENV	☒	MULTI-SENSE-C			Measure temperature, humidity and atmospheric pressure using BME680 environmental sensor.
BNO055_NDO	☐	MULTI-SENSE-C			Determine absolute orientation of the board in space using BNO055 sensor.
NCS36000_PIR	☐	PIR-GEVB			PIR motion detection using NCS36000 sensor
NCV78763_LEE	☐	D-LED-B-GEVK			Control two power LEDs connected to D-LED-B-GEVK using NCV78763 LED driver.
NOA1305_ALS	☐	ALS-GEVB			Measure ambient light level using NOA1305 ambient light sensor
Libraries					
Button	☐				On-board Push Button support
LED	☐				On-board LED support
PCA9655E	☐				16-bit I2C IO Expander library
Components					Platform independent drivers for various external components and IC.
Ambient Light Se					
Environmental Se					
LED Driver					
Motion Sensor					
Motor Driver					
Device					

BDK

v1.0.0

Bluetooth LE Development Kit for RSL10

BN0055 Absolute Orientation Sensor

SDK > COMPONENTS

Absolute orientation sensor library (accelerometer, gyroscope, magnetometer). More...

Data Structures

struct BN0055_NDOF_CalStatus

BN0055 calibration status structure. More...

struct BN0055_NDOF_Resources

Macros

#define BN0055_NDOF_IOEXP_ADDRESS (0x48 >> 1)

IO address of IO expander on Multisensor shield.

#define BN0055_NDOF_IOEXP_PORT (1)

IO expander port containing BN0055 related signals.

#define BN0055_NDOF_IOEXP_RST_PIN (0)

IO expander pin number for BN0055 reset signal.

#define BN0055_NDOF_IOEXP_RST_PIN_MASK (1 << BN0055_NDOF_IOEXP_RST_PIN)

#define BN0055_NDOF_IOEXP_INT_PIN (1)

IO expander pin number for BN0055 interrupt signal.

#define BN0055_NDOF_IOEXP_INT_PIN_MASK (1 << BN0055_NDOF_IOEXP_INT_PIN)

Enumerations

enum BN0055_NDOF_PowerMode (BN0055_NDOF_POWER_MODE_NORMAL = 0, BN0055_NDOF_POWER_MODE_LOW_POWER = 1, BN0055_NDOF_POWER_MODE_SUSPEND = 2)

Available power modes of BN0055. More...

Functions

int32_t BN0055_NDOF_Initialize (void)

Initializes the BN0055 and sets it into Nine Degrees of Freedom (NDOF) operation mode. More...

int32_t BN0055_NDOF_SetPowerMode (enum BN0055_NDOF_PowerMode mode)

Allows to set chips power mode to reduce current consumption or disable sensors. More...

int32_t BN0055_NDOF_GetCalibrationStatus (struct BN0055_NDOF_CalStatus *status)

Reads calibration status of BN0055 sensors. More...

int32_t BN0055_NDOF_ReadLinearAccel (struct bn0055_linear_accel_float_t *pt)

Reads latest linear acceleration vector in MSG from device. More...

int32_t BN0055_NDOF_ReadGravity (struct bn0055_gravity_float_t *pt)

Reads latest gravity vector in MSG from device. More...

int32_t BN0055_NDOF_ReadAngRotation (struct bn0055_gyro_float_t *pt)

Reads latest angular rotation vector in DPS from device. More...

int32_t BN0055_NDOF_ReadAbsOrientation (struct bn0055_euler_float_t *pt)

Reads latest absolute orientation vector in degrees from device. More...

Run Time Environment Configuration


These parameters are part of the RTE_BN0055_NDOF.rte configuration file and can be used to adjust library behavior. This file is copied into the Eclipse project when the BN0055_NDOF component is selected and can be edited by using the CMSIS Configuration Wizard editor.

#define RTE_BN0055_NDOF_EXT_CLK_SRC 1

Detailed Description

Absolute orientation sensor library (accelerometer, gyroscope, magnetometer).

The BN0055 is a System in Package integrating a triaxial accelerometer, a triaxial gyroscope, a triaxial geomagnetic sensor and 32 bit microcontroller.

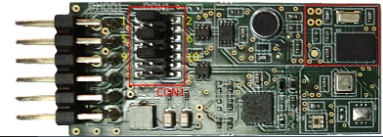

Main Help Page

The main help page is accessible via Device/BDK, visible for all use cases in *.rteconfig file. It's further divided into various modules as shown below.

Software Components	Sel.	Variant	Vendor	Version	Description
RSL10			ON Semiconductor		ARM Cortex-M3 48 MHz, 32 kB RAM, 384 kB ROM
BLE		BDK	ON Semiconductor	1.0.0	RSL10 BLE stack implementations for BDK based applications.
Board Support		BDK-GEVK	ON Semiconductor	1.0.0	Board Support package for BDK-GEVK evaluation board.
Components					Platform independent drivers for various external components and IC.
Device					
BDK					BDK software components compatible with all evaluation boards.
AES	☐		ON Semiconductor	1.0.0	AES module from mbedTLS
Event Callback	☒		ON Semiconductor	1.0.0	Library for assigning of multiple callbacks to events.
HAL	☒		ON Semiconductor	1.0.0	Peripheral HAL drivers and RSL10 configuration
Output Redirection	☒	SEGGER RTT	ON Semiconductor	1.0.0	Redirects standart output calls using SEGGER RTT
Scheduling	☒		ON Semiconductor	1.0.0	Management layer for Event Kernel Application Task
Software Timer	☒		ON Semiconductor	1.0.0	Allows to create multiple timer events while using only single hardware timer.
Bluetooth Profiles					
Libraries					
Startup	☒	release	ON Semiconductor	2.1.10	RSL10-CMSIS Startup Library and Include Folders (libcmsis)

BDK

Abstraction layers for RSL10 Bluetooth Development Kit based applications. [More...](#)

Modules

COMPONENTS
TASK_APP Management Application Task management & custom event scheduling.
Event Callback Library for attaching multiple callback functions (listeners) to single event source.
HAL Peripheral Hardware Abstraction Layer for RSL10.
Software Timer Allows creation of unlimited number of software timers with Ticker, Timeout and Timer functionality.
ANSI Terminal Color support Bring color to your terminal screen.
Target Evaluation board specific definitions.
API
Bluetooth Low Energy Library for handling of BLE functionality and libraries of supported BLE profiles.

Sub-sections may be expanded for further information (Ex: HAL interfaces shown below)

HAL BDK
Peripheral Hardware Abstraction Layer for RSL10. More...
Modules
Clock Configurations Defines possible clock configurations for proper operation of BDK.
I2C I2C interface for communication with connected shields.
SPI SPI interface for communication with connected shields.
UART UART interface for communication with connected shields.
Macros
<code>#define HAL_TIME_RESOLUTION_US (1000)</code>
<code>#define HAL_TIME_ELAPSED_SINCE(start_timestamp) (HAL_Time() - start_timestamp)</code>
<code>#define HAL_OK (0)</code>

B-IDK also provides software timers and applications task manager abstraction layers to enable management of specific tasks and timing within the event kernel.

BDK

Abstraction layers for RSL10 Bluetooth Development Kit based applications. More...

Modules

COMPONENTS

TASK_APP Management

Application Task management & custom event scheduling.

Event Callback

Library for attaching multiple callback functions (listeners) to single event source.

HAL

Peripheral Hardware Abstraction Layer for RSL10.

Software Timer

Allows creation of unlimited number of software timers with Ticker, Timeout and Timer functionality.

ANSI Terminal Color support

Bring color to your terminal screen.

Target

Evaluation board specific definitions.



API

Bluetooth Low Energy

Library for handling of BLE functionality and libraries of supported BLE profiles.

Custom Service Firmware

In order to read sensor data and control actuators connected to the BDK-GEVK from the RSL10 Sense and Control mobile app, the Custom Service Firmware must be downloaded onto the BDK-GEVK. This firmware can be found as Custom Service Firmware under examples in the CMSIS pack.

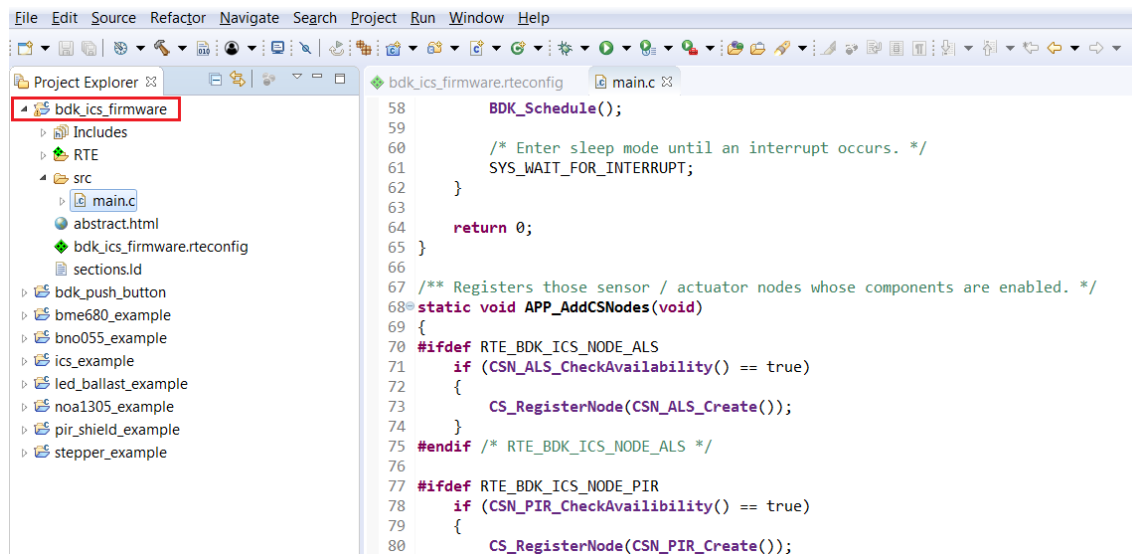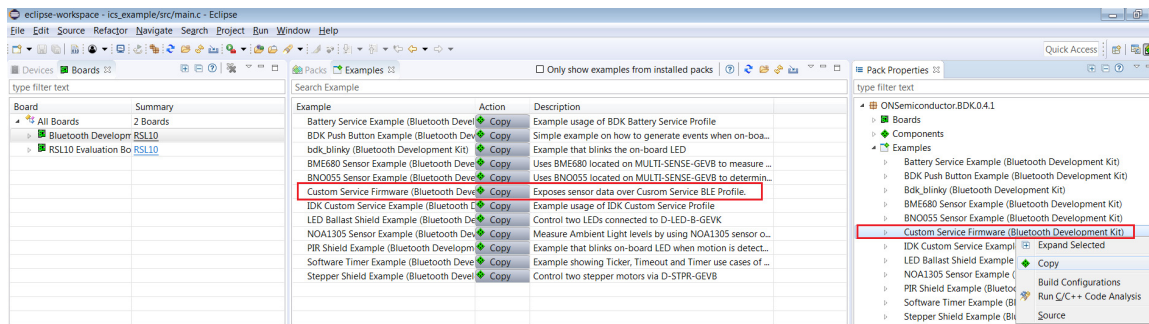

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is as such not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and should as such only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

The board is delivered "AS IS" and without warranty of any kind including, but not limited to, that the board is production-worthy, that the functions contained in the board will meet your requirements, or that the operation of the board will be uninterrupted or error free. ON Semiconductor expressly disclaims all warranties, express, implied or otherwise, including without limitation, warranties of fitness for a particular purpose and non-infringement of intellectual property rights.

ON Semiconductor reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by ON Semiconductor shall not constitute any representation or warranty by ON Semiconductor, and no additional obligations or liabilities shall arise from ON Semiconductor having provided such information or services.

The boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. Should you purchase or use the board for any such unintended or unauthorized application, you shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by ON Semiconductor to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

ON Semiconductor does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: ON Semiconductor shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if ON Semiconductor is advised of the possibility of such damages. In no event shall ON Semiconductor's aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

For more information and documentation, please visit www.onsemi.com.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT

North American Technical Support:

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative