
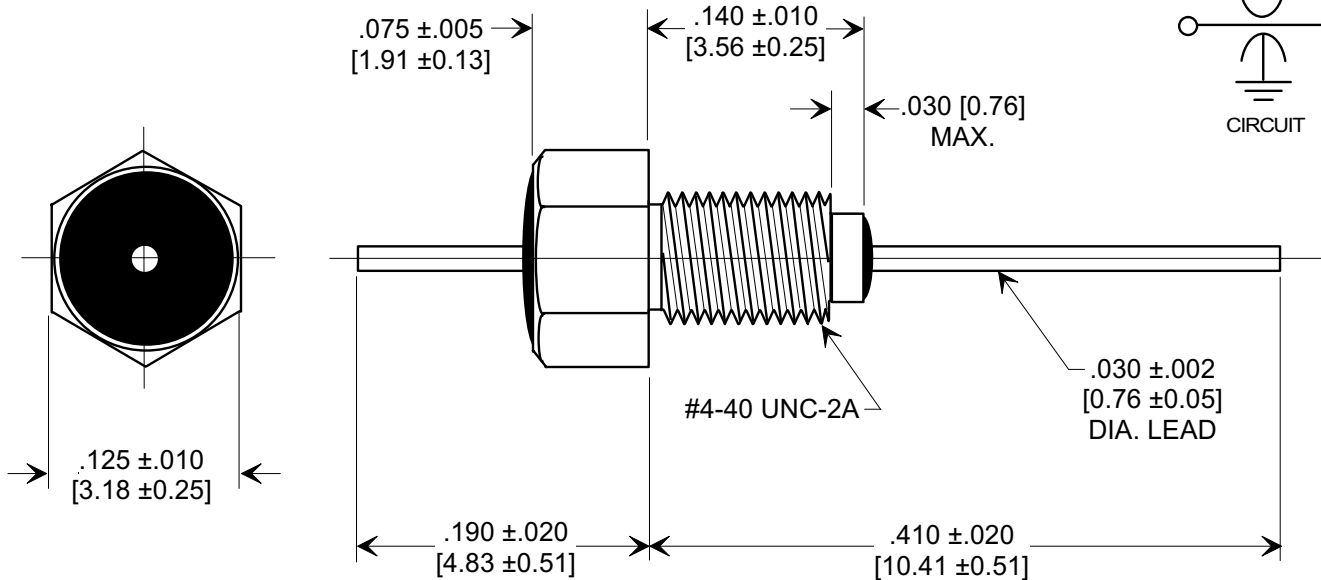




# MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING  
DIMENSIONS IN METRIC - [ ]

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.



## MOUNTING HARDWARE

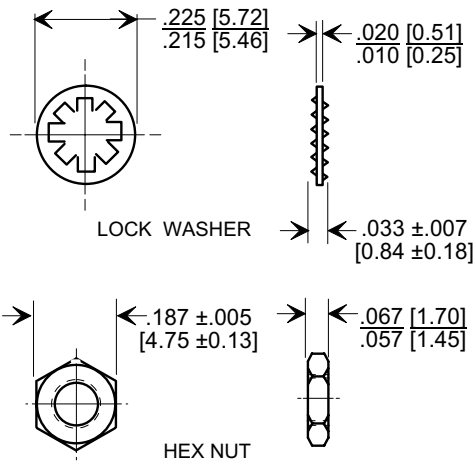

## NOTES:

1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
2. SILVER PLATED CASE, LEAD AND MOUNTING HARDWARE.
3. MAX. RECOMMENDED MOUNTING TORQUE : 2.0 lb. - in.
4. MAX. RECOMMENDED SOLDERING TEMPERATURE : 260°C.  
SEE INSTALLATION RECOMMENDATIONS.
5. NUT AND LOCKWASHER INCLUDED.
6. TUSONIX STANDARD PART NUMBER: 4403-037.  
TUSONIX RoHS COMPLIANT PART NUMBER: 4403-037 LF.  
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART  
NUMBER WHEN ORDERING.
7. PART MARKING: TRADEMARK AND VARIATION NUMBER ON  
HEX FLATS.  
STANDARD PART: BLACK INK. RoHS PART: GREEN INK.

1,000	GMV	300	200	10	----	5	20	35	45
CAP.(pf)	TOLERANCE	+85 °C	+125 °C	DC	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		DC WORKING VOLTAGE		CURRENT (AMPS)	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				

REVISION RECORD	0	Original Release C.O. 6965	1	7052	RDN TO COMP FMT. S.M. 07-16-02	2	20020715-1-25	REVISED NOTES. S.M. 08-01-05	3	20050718-2-02	--TOLERANCES-- Unless Otherwise Specified	Title <b>MINI BUSHING STYLE EMI FILTER</b>	
		-040 & -680 ADDED, DC WAS 5. E.C. 11-20-92									DECIMAL ± NOTED	Drawn S.M. 06-10-02 Scale 8 X	
											ANGLES ± NOTED	Approved J.Mc. 06-10-02	
											<b>TUSONIX</b> TUCSON, ARIZONA	A	4403-037