
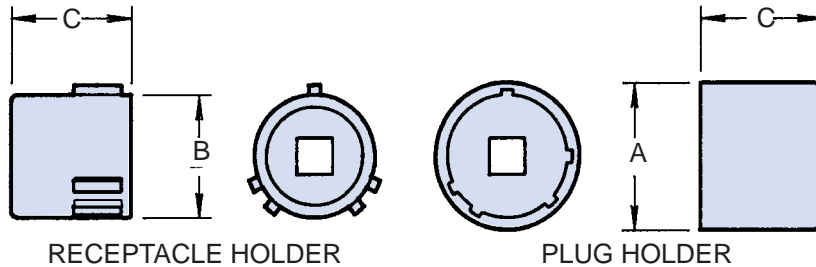


600J005
Plug and Receptacle Holder
 MIL-DTL-81511 Series I, II, III & IV

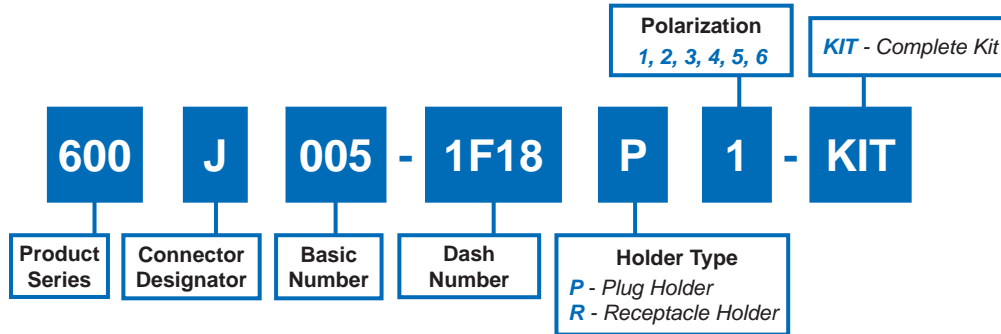

SERIES I and III: Dash Number, Shell Size, Torque and Dimensions

| Dash Number | Shell Size | | Max Torque (± 5 Inch Lbs) | A Dia Max | B Dia Max | C Dim Max |
|-------------|------------|--------------|------------------------------|--------------|--------------|--------------|
| | Commercial | Military Ref | | | | |
| 1A08 | 08 | A | 40 | .556 (14.1) | .394 (10.0) | .950 (24.1) |
| 1B10 | 10 | B | 40 | .681 (17.3) | .519 (13.2) | .950 (24.1) |
| 1D14 | 14 | D | 40 | .931 (23.6) | .769 (19.5) | .950 (24.1) |
| 1E16 | 16 | E | 40 | 1.058 (26.9) | .895 (22.7) | .950 (24.1) |
| 1F18 | 18 | F | 40 | 1.181 (30.0) | 1.019 (25.9) | .950 (24.1) |
| 1G20 | 20 | G | 40 | 1.306 (33.2) | 1.144 (29.1) | .950 (24.1) |
| 1H22 | 22 | H | 40 | 1.431 (36.3) | 1.269 (32.2) | .950 (24.1) |
| 1J24 | 24 | J | 40 | 1.556 (39.5) | 1.394 (35.4) | .950 (24.1) |

SERIES II and IV: Dash Number, Shell Size, Torque and Dimensions

| Dash Number | Shell Size | | Max Torque (± 5 Inch Lbs) | A Dia Max | B Dia Max | C Dim Max |
|-------------|------------|--------------|------------------------------|--------------|--------------|--------------|
| | Commercial | Military Ref | | | | |
| 2A08 | 08 | A | 40 | .544 (13.8) | .374 (9.5) | .950 (24.1) |
| 2B10 | 10 | B | 40 | .669 (17.0) | .499 (12.7) | .950 (24.1) |
| 2D14 | 14 | D | 40 | .919 (23.3) | .749 (19.0) | .950 (24.1) |
| 2E16 | 16 | E | 40 | 1.045 (26.5) | .875 (22.2) | .950 (24.1) |
| 2F18 | 18 | F | 40 | 1.169 (29.7) | .999 (25.4) | .950 (24.1) |

APPLICATION NOTES

1. Metric dimensions (mm) are indicated in parentheses.
2. Material: Case hardened carbon steel with electroless nickel finish.
3. Receptacle and plug holder drives:
 1/4" - Shell sizes 08, 10 and 12; 3/8" - Shell sizes 14 and up.

Dimensions in inches (millimeters) and are subject to change without notice.