NOTES:

1. MATERIALS AND FINISHES:
   SMPM STR PLUG - BeCu, GOLD PLATING
   CABLE - 0.047 SEMI-RIGID CONFORMABLE

2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM

3. PACKAGING:
   A. QUANTITY: SINGLE PACK
   B. MARKING: BAG TO BE MARKED
      "AMPHENOL RF, 95-725-112-XXX AND DATE CODE"

THIRD ANGLE PROJ.

REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	20-Mar-17	3344	BMG
B	SHEET 1 CHANGE	06-Apr-17	3506	BMG
C	FREQUENCY AND VSWR REQUIREMENTS UPDATED	19-Mar-18	7383	BMG



SCALE 0.800

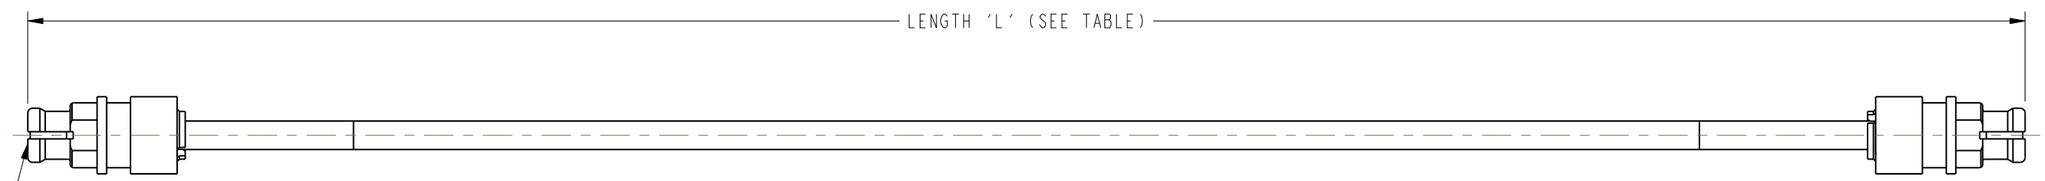

INTERFACE PER
MIL-STD-348
SERIES: SMPM PLUG
TYP(2)

LENGTH TABLE		
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH AND TOLERANCE 'L' IN INCHES [METERS]
95-725-112-030	-	3.00 [0.076]
-	95-725-112M010	3.94 [0.100]
95-725-112-040	-	4.00 [0.102]
95-725-112-050	-	5.00 [0.127]
95-725-112-060	-	6.00 [0.152]
95-725-112-070	-	7.00 [0.178]
95-725-112-080	-	8.00 [0.203]
95-725-112-090	-	9.00 [0.229]
-	95-725-112M025	9.84 [0.250]
95-725-112-100	-	10.00 [0.254]
95-725-112-110	-	11.00 [0.279]
95-725-112-120	-	12.00 [0.305]
95-725-112-180	-	18.00 [0.457]
-	95-725-112M050	19.69 [0.500]
95-725-112-240	-	24.00 [0.610]
-	95-725-112M075	29.53 [0.750]
95-725-112-360	-	36.00 [0.914]
-	95-725-112M100	39.37 [1.000]
95-725-112-480	-	48.00 [1.219]
-	95-725-112M200	78.74 [2.000]

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS:

- [X] FREQUENCY : DC TO 18 GHz
- [X] VSWR : 1.25 MAX. [DC-18.0 GHz]
- [ ] INS. LOSS: ____ dB MAX
- [X] CONTINUITY
- [X] HI-POT : 500 VRMS
- [ ] OTHER

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

<0.5mm	0.5 - 6mm	6 - 30mm	30 - 120mm	ANGLES
± 0.05mm	±0.1mm	±0.2mm	± 0.3mm	±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL
-

REFERENCE
EAR# EAR # 7428
REF: --

CONFIGURATION LEVEL: In Work

FINISH

DRAWN	DATE
VIJI K	06-Apr-17
ENGINEER	DATE
VIJI K	06-Apr-17
APPROVED	DATE
K. CAPOZZI	19-Mar-18

CAD FILE

TITLE
SMPM STR PLUG TO
SMPM STR PLUG USING 0.047
SEMI-RIGID CONFORMABLE
CABLE, VARIOUS LENGTH

SCALE: 4.0:1.0 | SHEET 2 OF 2

DWG SIZE: B | REV: C

Amphenol RF
www.amphenolrf.com

DRAWING NO. 95-725-112-XXX
ITEM NO. 95-725-112-XXX
PART NO. 95-725-112-XXX