



MECHANICAL

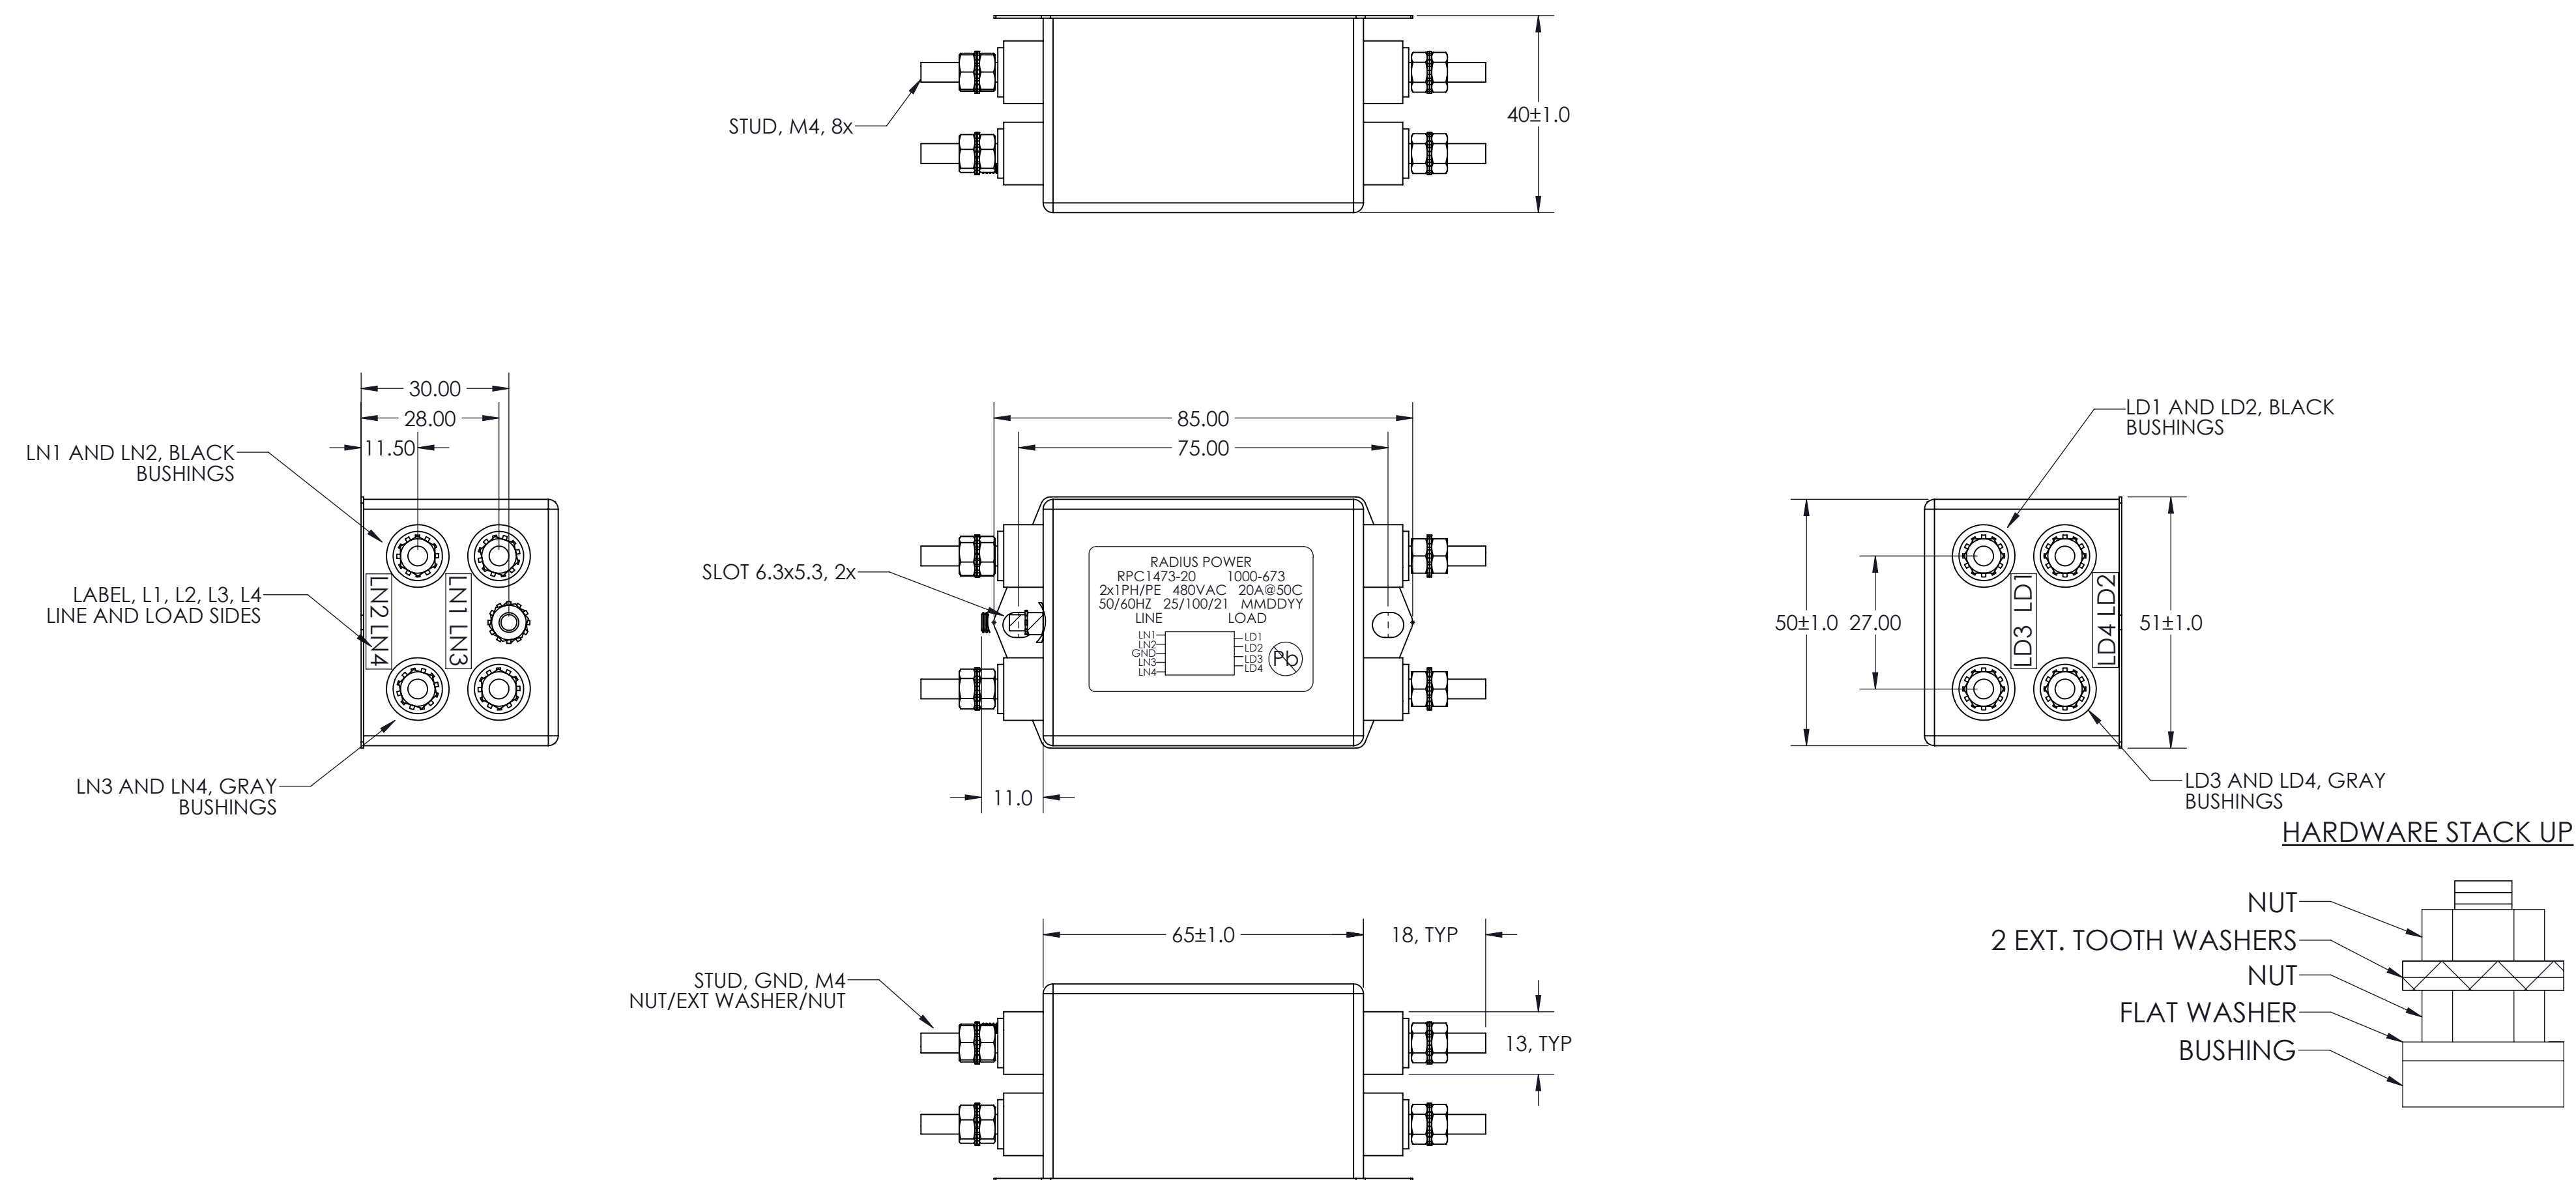

SCHEMATIC

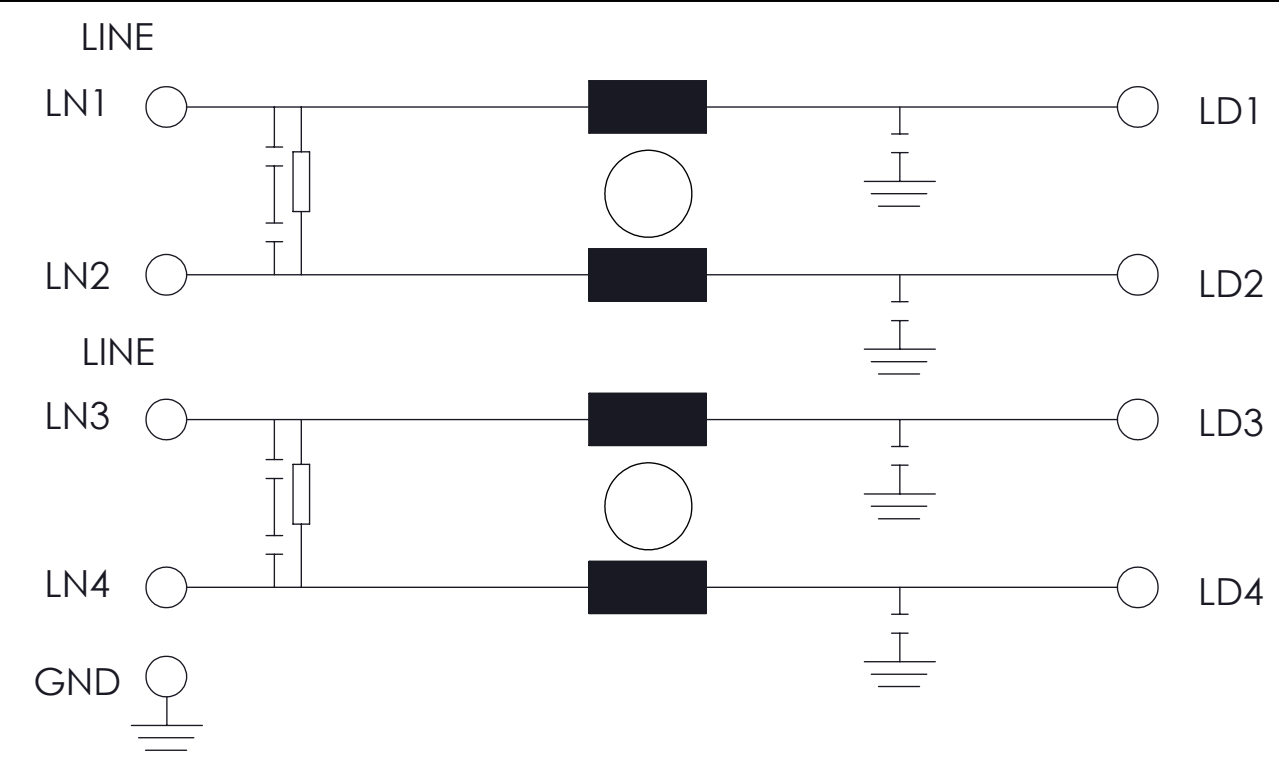

MODEL / ITEM	RPC1473-20 / 1000-673	
UNITS	MM	
DATE	072215	
HOUSING	CRS/NICKEL OR TIN	
VOLT / CURR	480VAC / 20A	
FREQ(HZ)	50/60	
AMB / STORAGE	50C / -40 to 100C	
WT(LB/KG), TYP	0.5/0.2	
HIPOT,LG (VDC)	3.5K	 RADIUS POWER AN AstrodyneTDI COMPANY
TYP LK CURR	(4.0mA (480V/60HZ)	
TOLERANCE	0.0/0.00=±0.5/±0.25	
	ANGLE=±0.5°	
		CONFIDENTIAL DOCUMENT