


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L = ±.3 [7]
MLT1S-CP316	1" [25]	100	5.0" [127]
MLT2S-CP316	2" [51]	100	7.9" [201]
MLT2.75-CP316	2.7" [69]	100	10.2" [259]
MLT4S-CP316	4" [102]	100	14.3" [362]
MLT6S-CP316	6" [152]	100	20.5" [521]
MLT8S-CP316	8" [203]	100	26.8" [679]
MLT10S-CP316	10" [254]	100	33.0" [838]

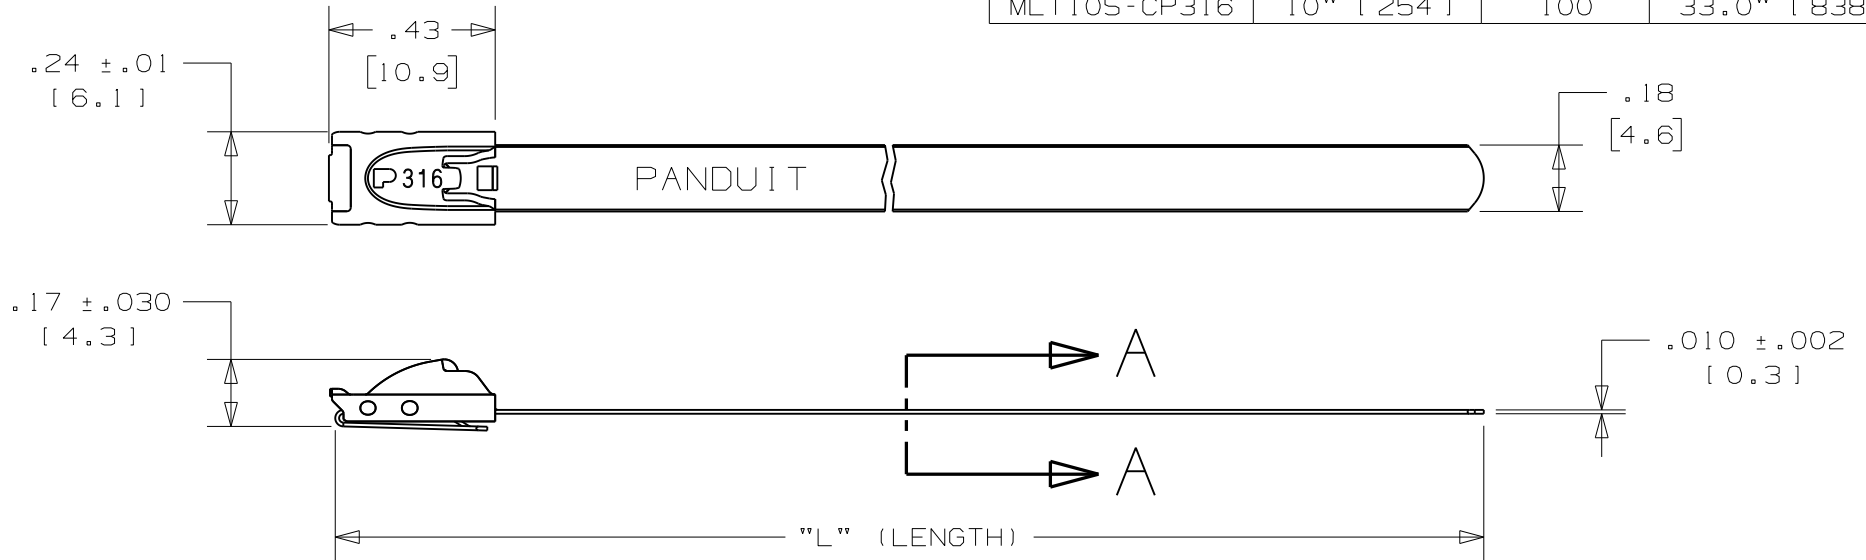

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS. (889 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

FULLY ROUNDED EDGES ALONG STRAP BODY

SECTION A - A

SCALE 8:1

				PANDUIT CORP. TINLEY PARK, ILLINOIS	
				METAL LOCKING TIE STANDARD SERIES-316 STAINLESS STEEL -CUSTOMER DRAWING-	
OBA	2/12	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	
REV	DATE	BY	CHK	DESCRIPTION	DRAWING NO.
					N4112OBS_DC
			DRAWN BY	CHK'D	SCALE
			JAMB	DPN	2x