

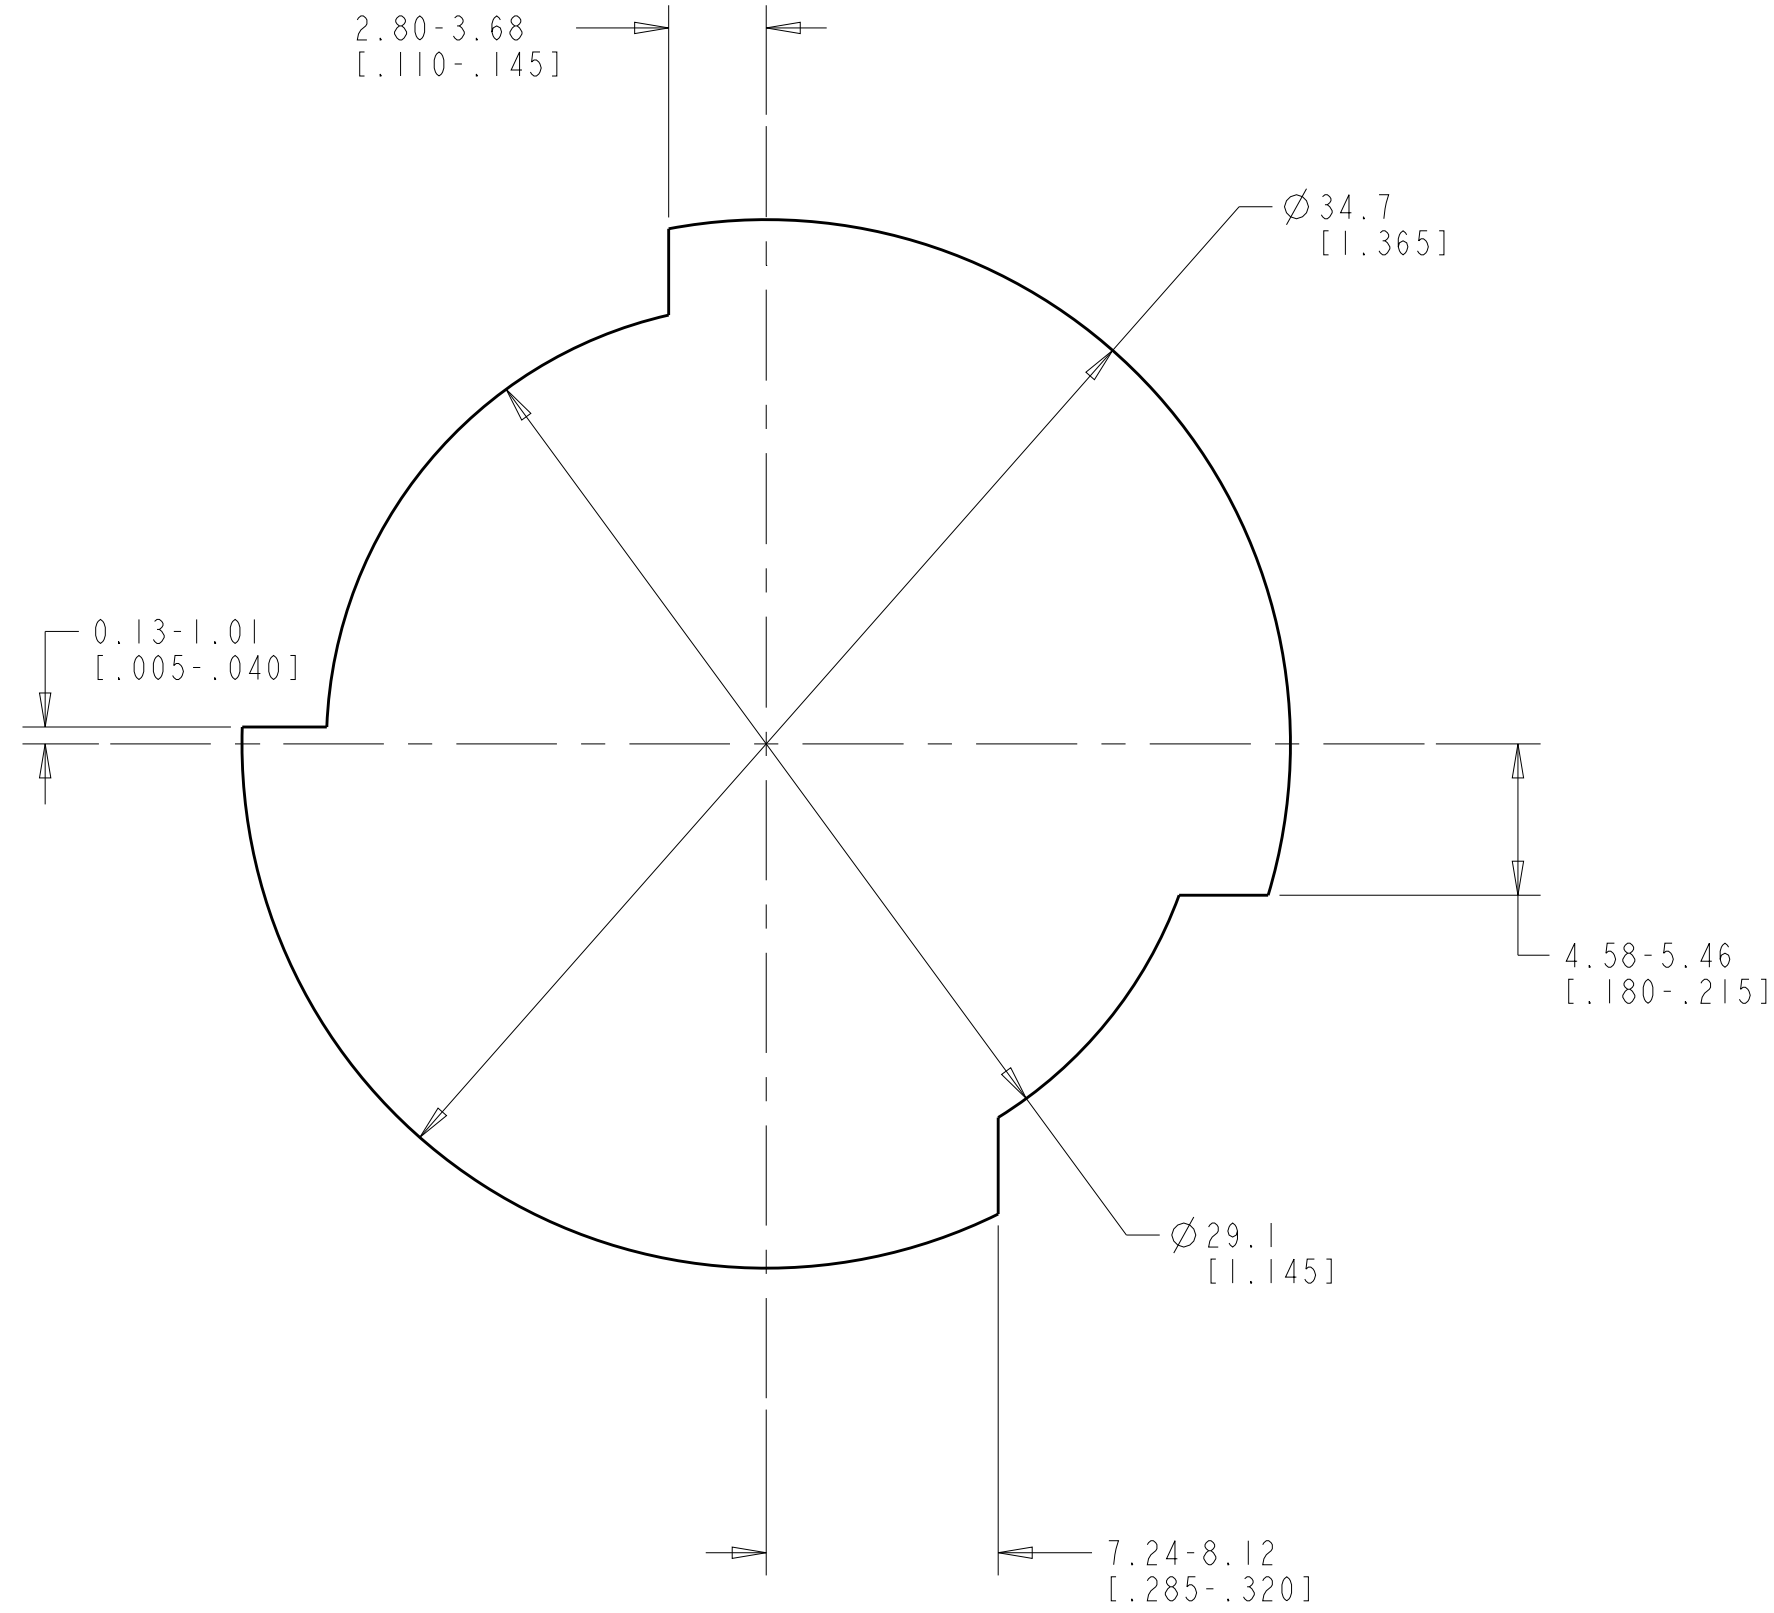
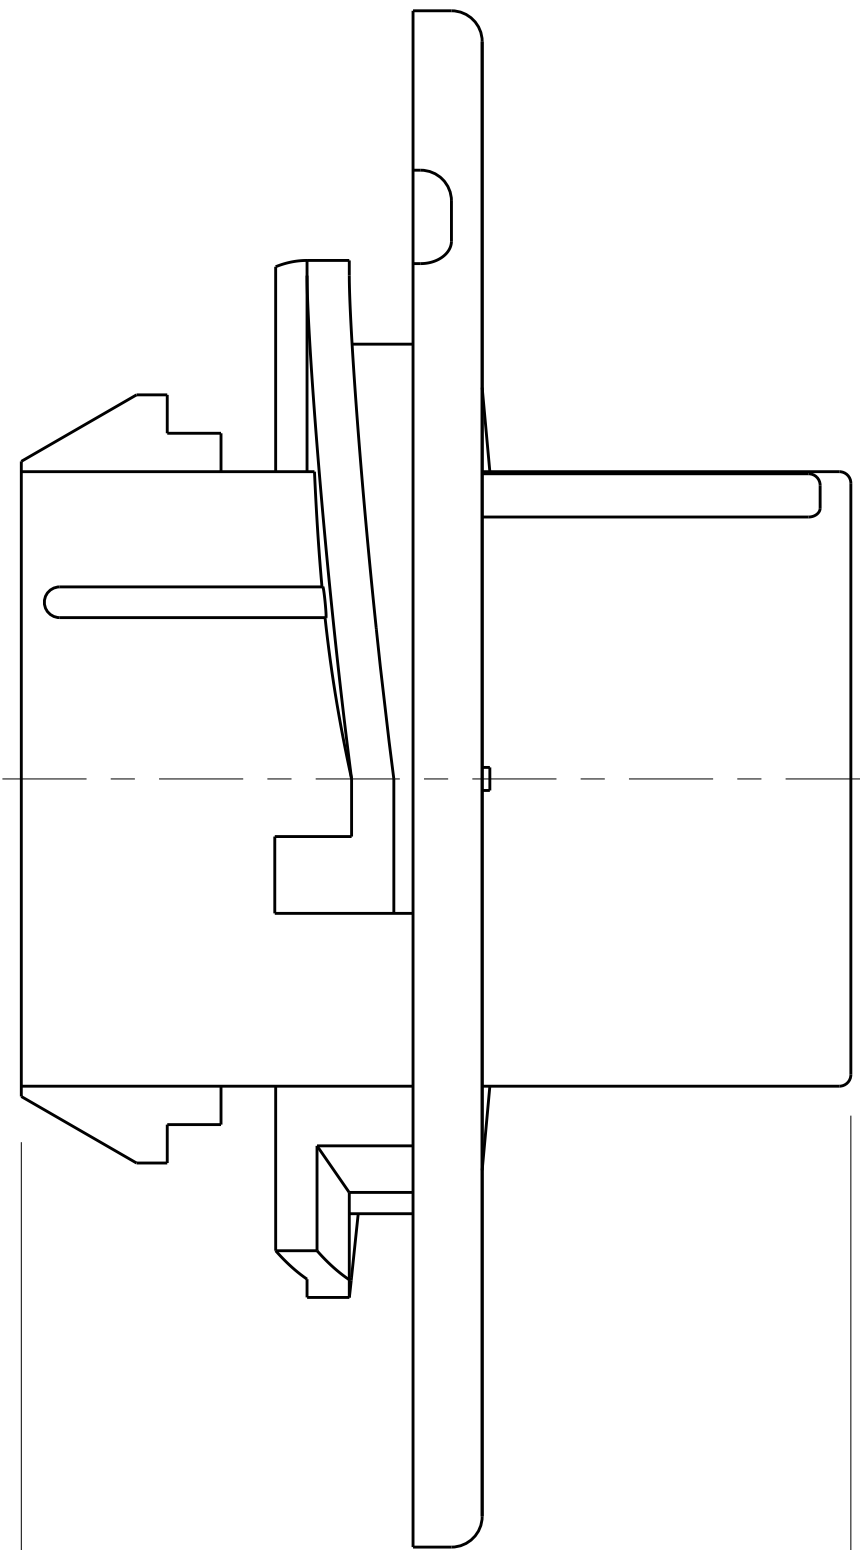




LOC		DIST		REVISIONS				
CM	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
			D	REVISED PER ECR-17-015775		02NOV2017	BDA	KR

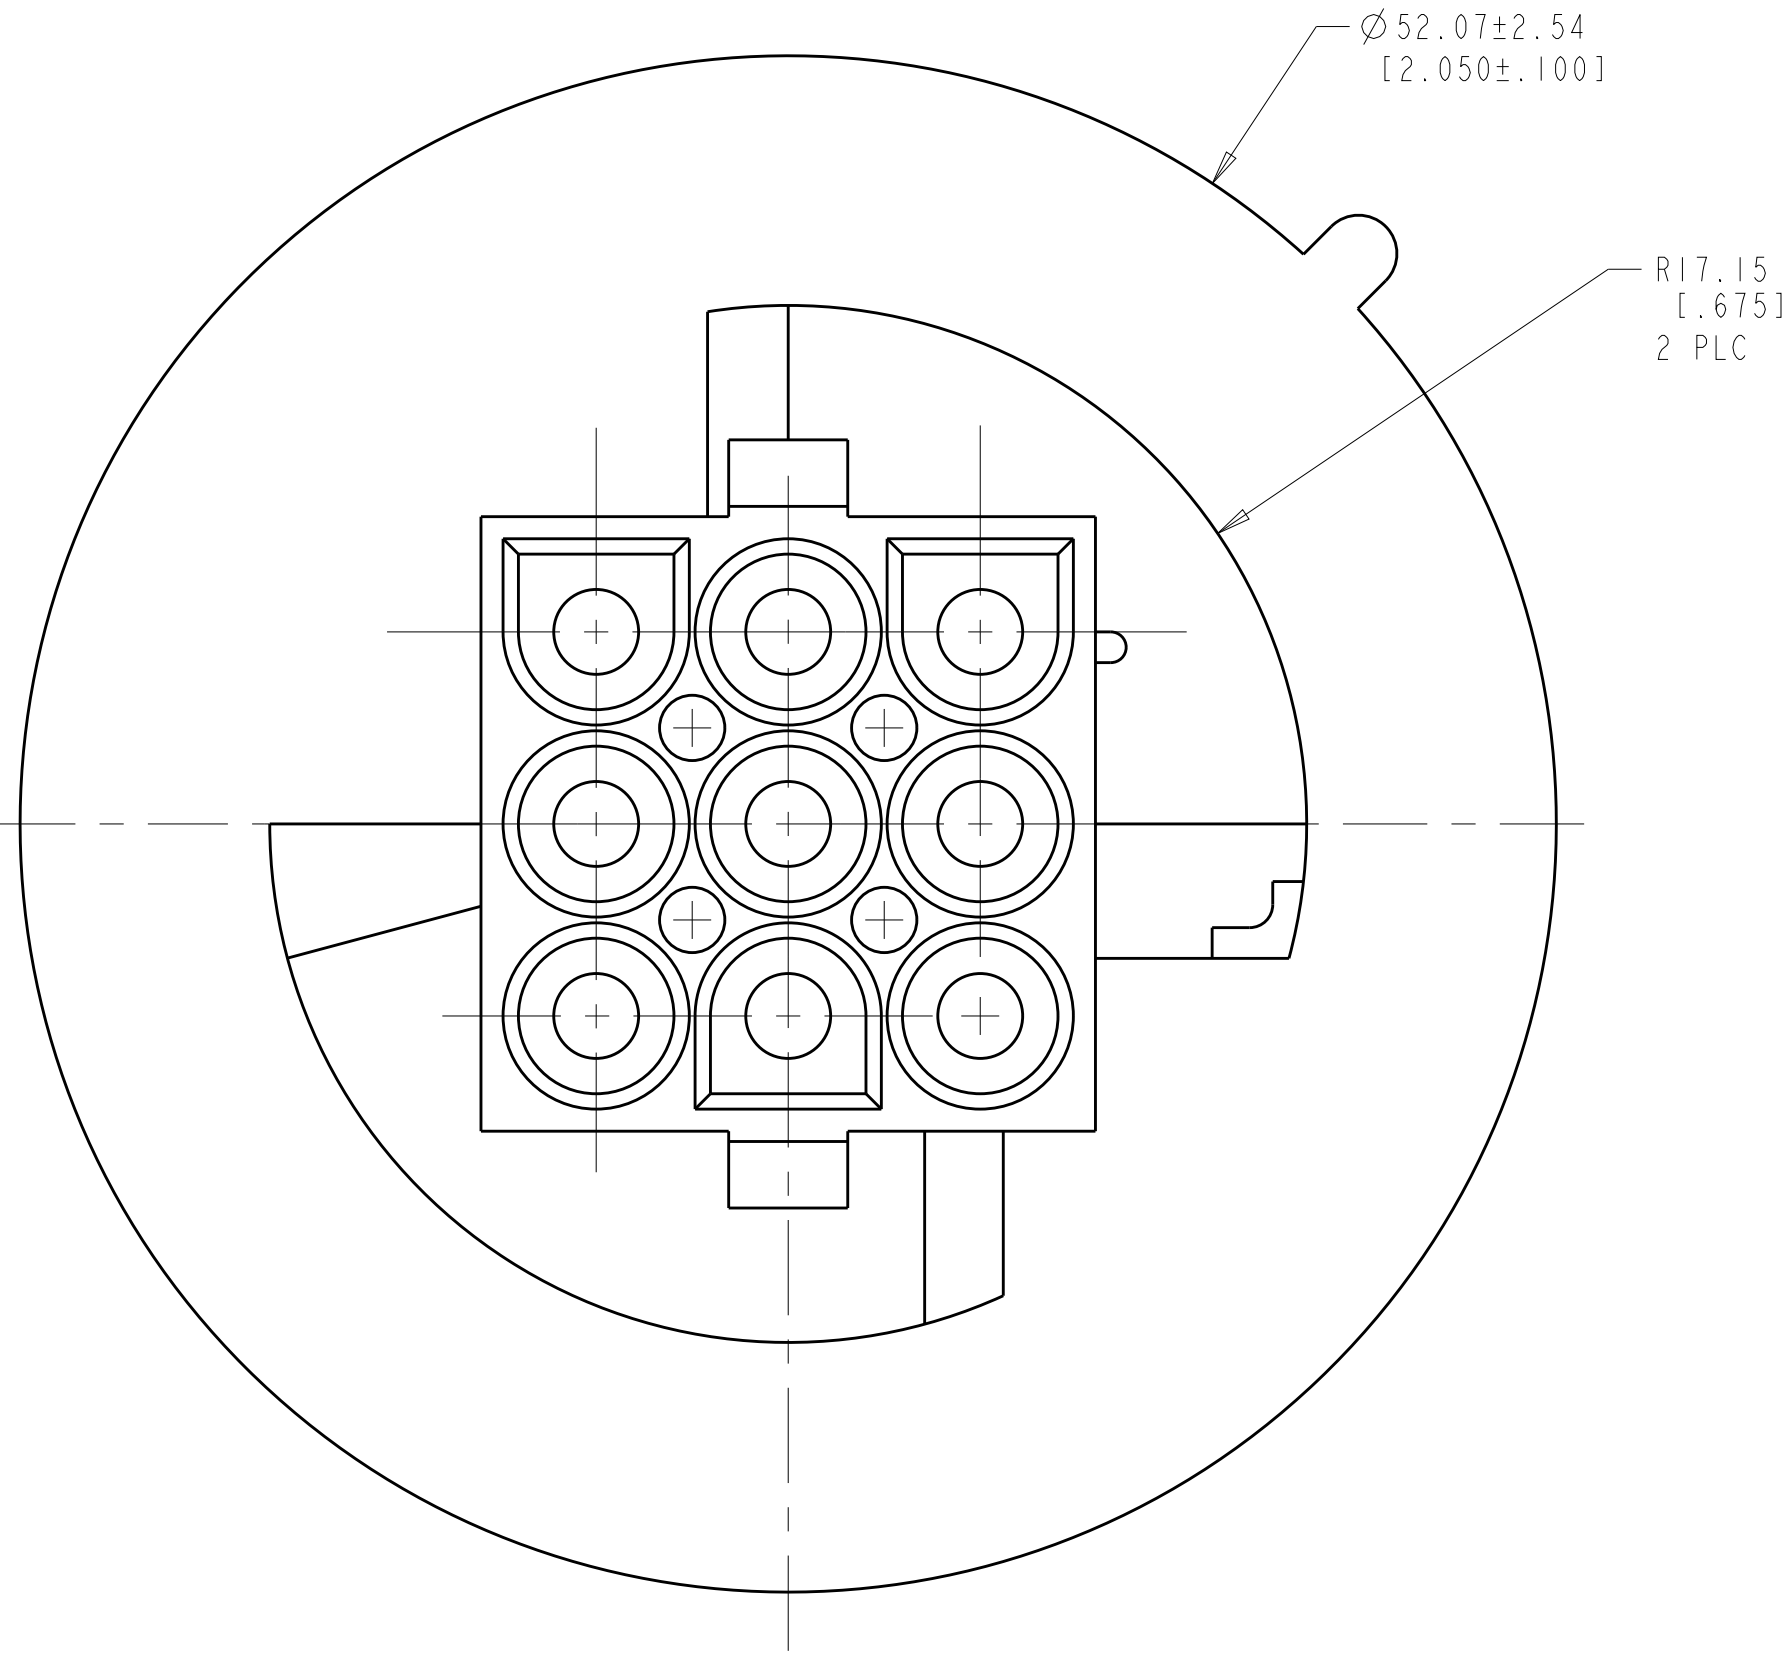

RECOMMENDED CUT OUT

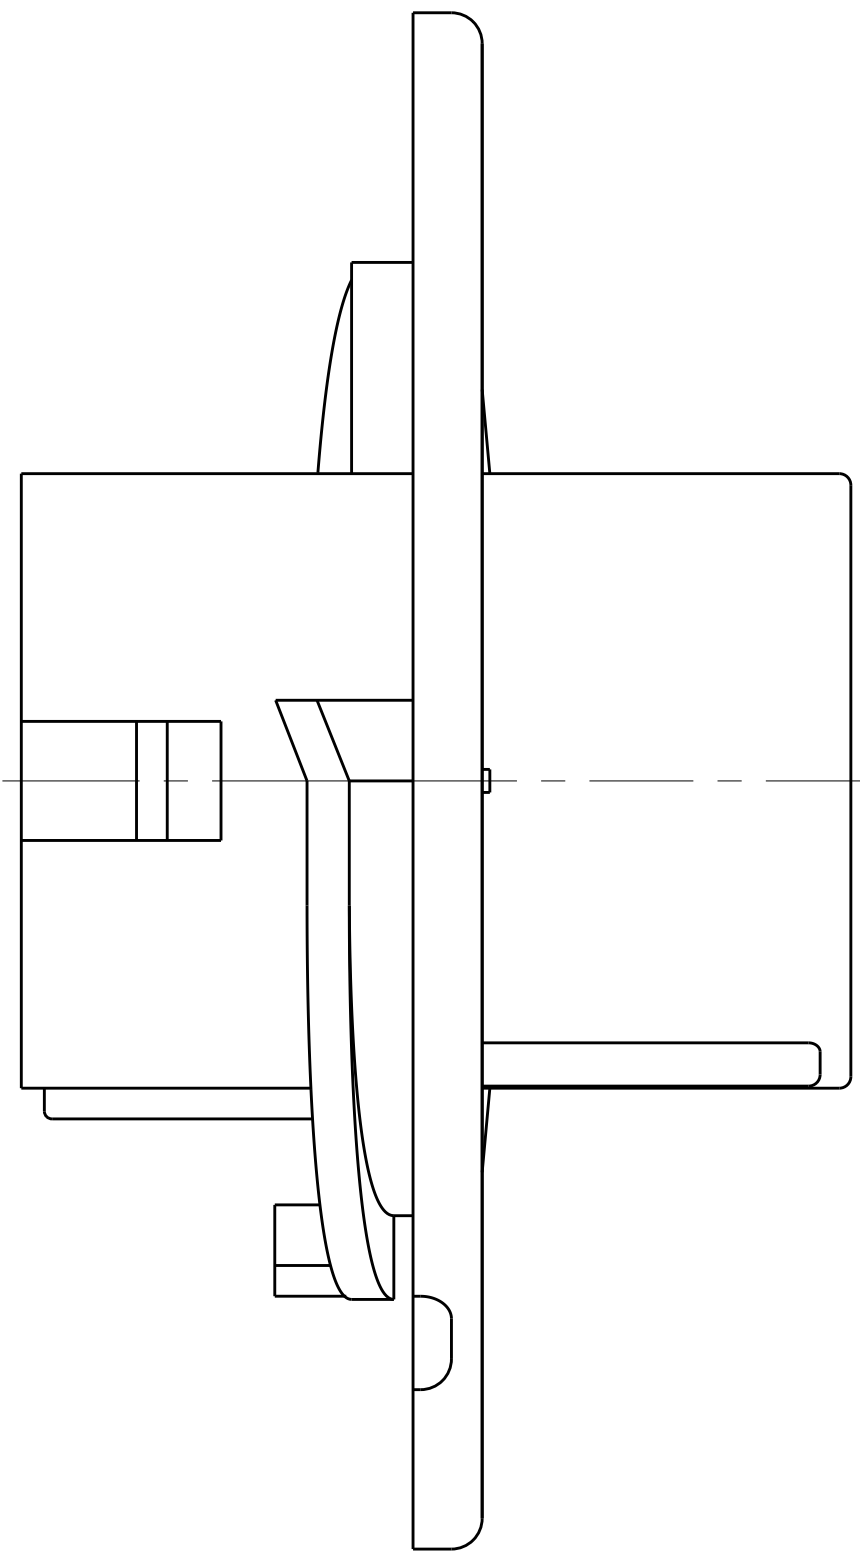

12.95±0.17 [1.510±0.007]
27.43±0.38 [1.080±0.015]

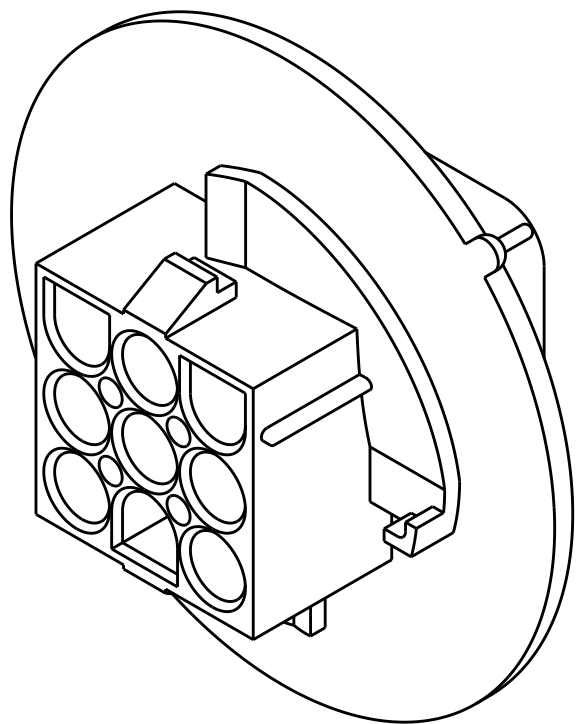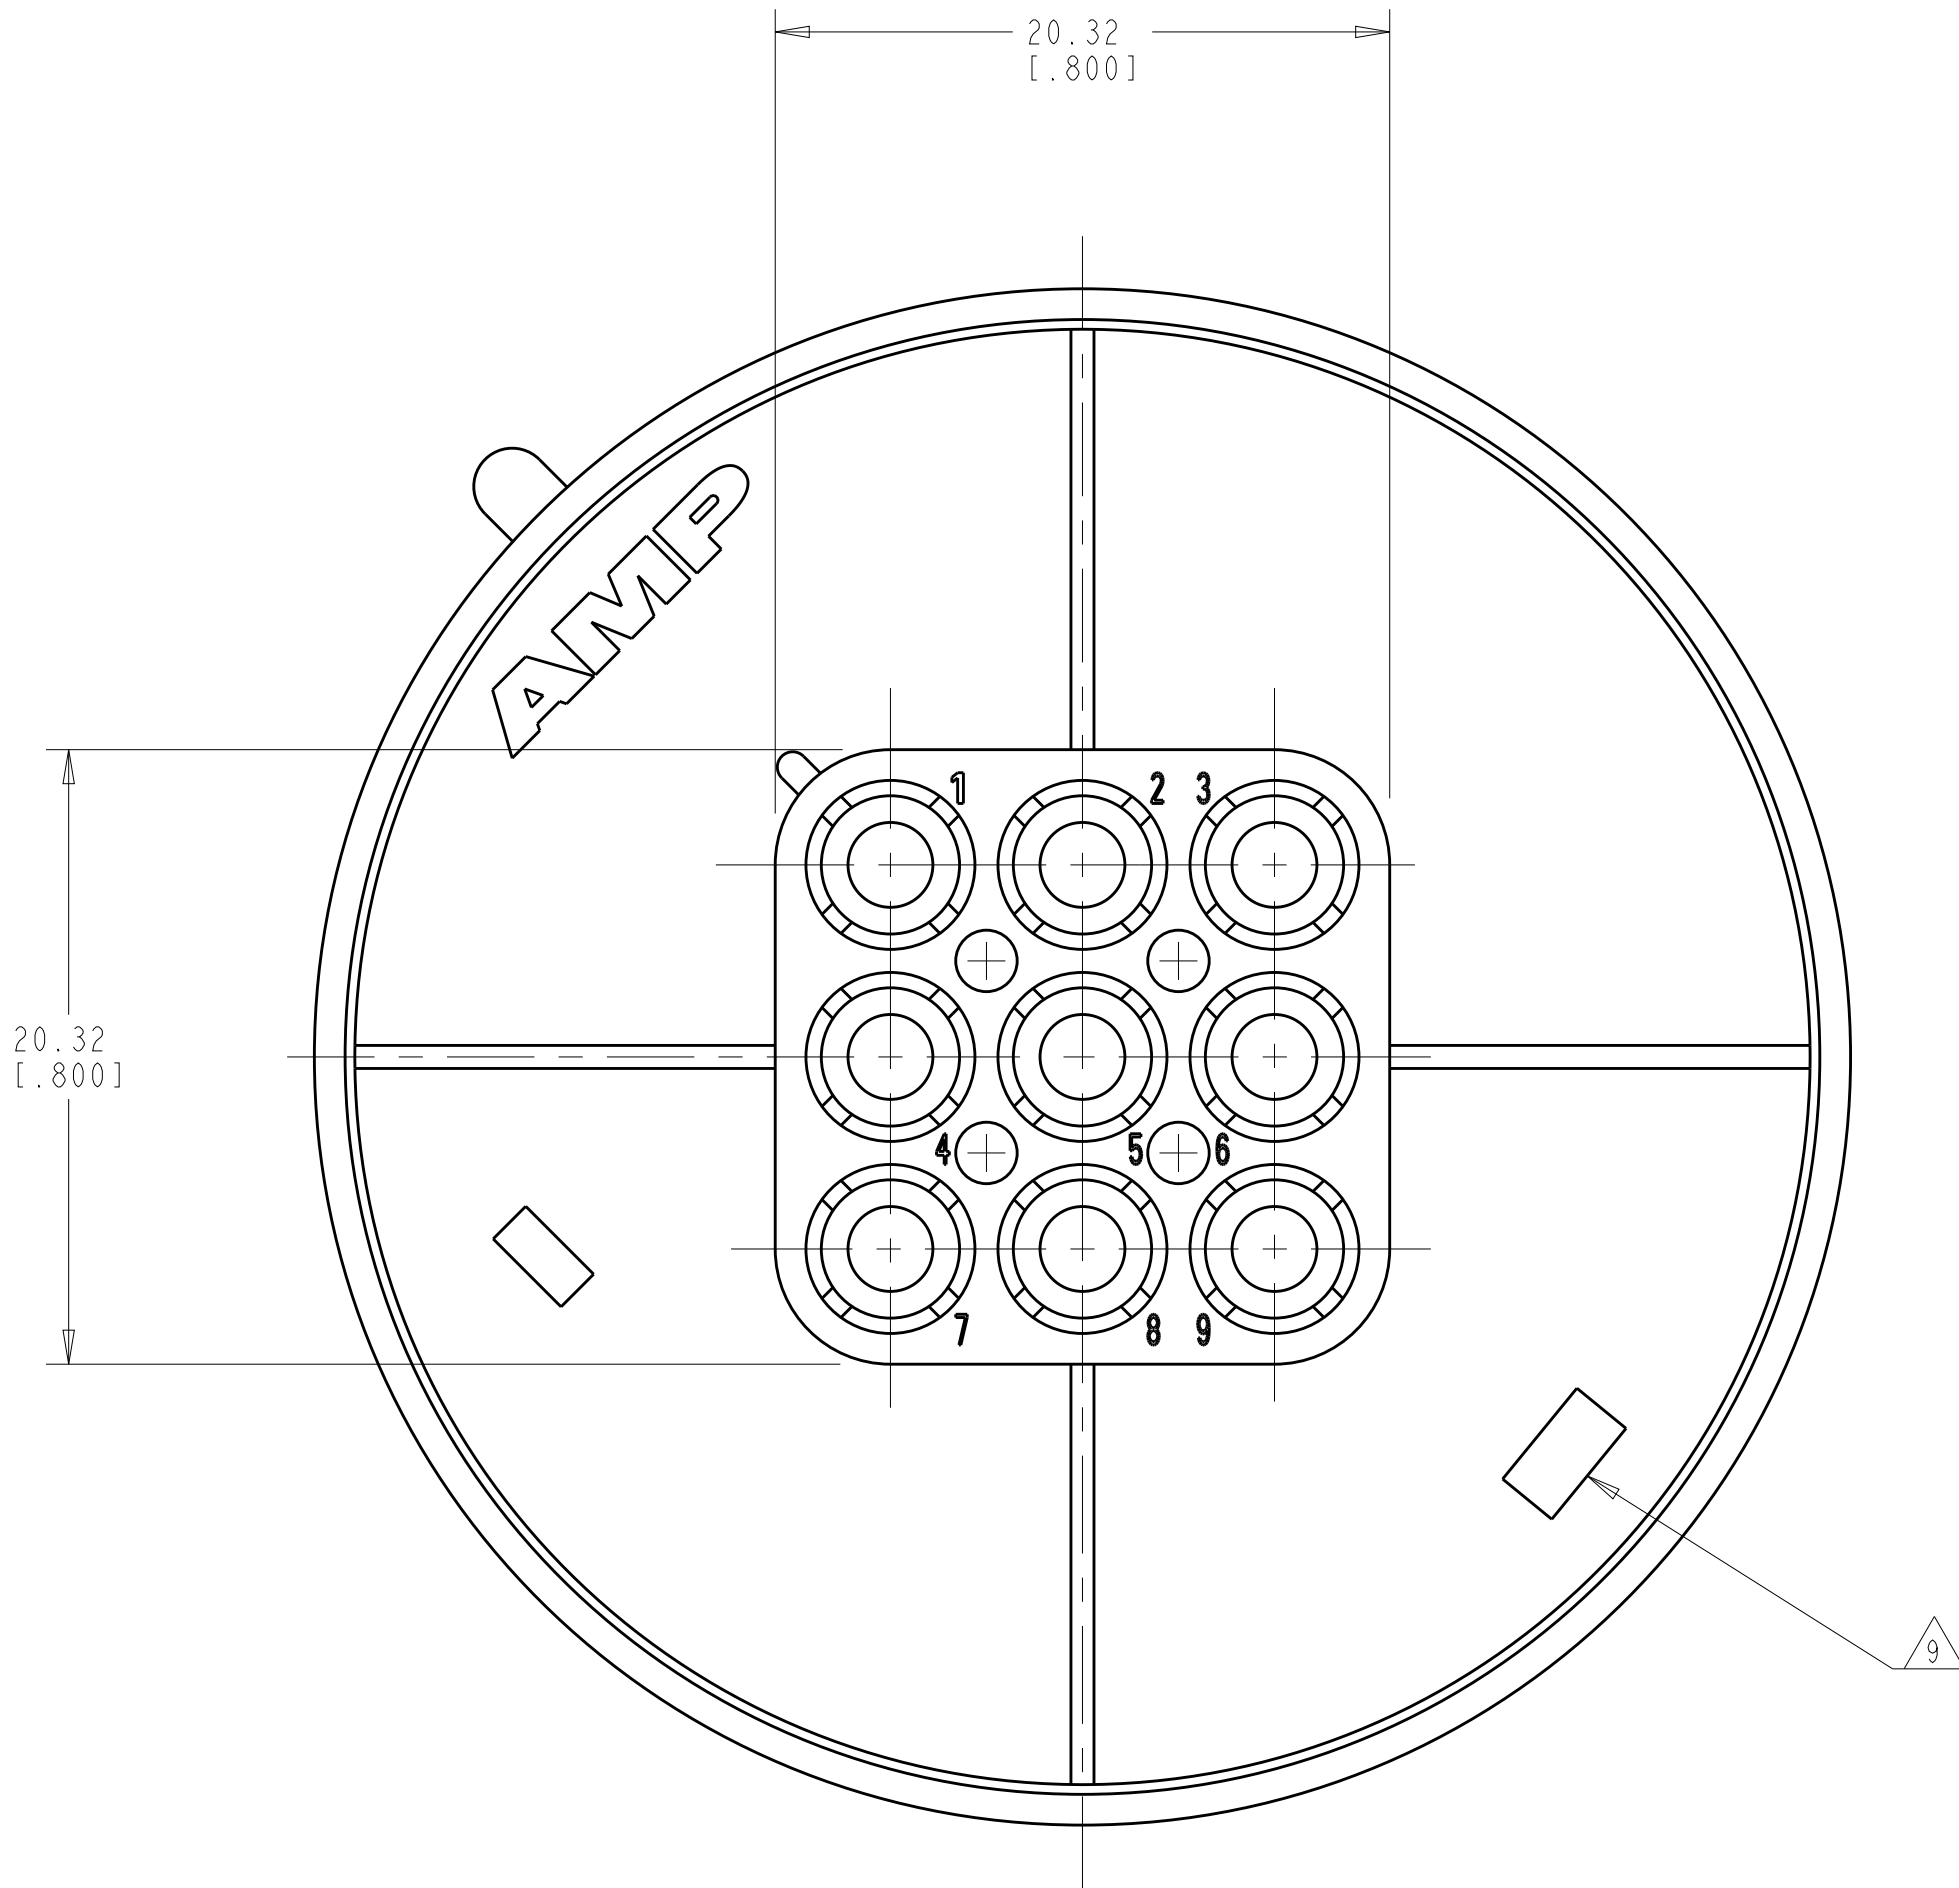



3-DIMENSIONAL MODEL
SCALE 2:1

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [0.030 - 0.090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
5. FLAMMABILITY V-2 FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-11-10.
6. GLOW-WIRE FLAMMABILITY (GWI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
7. GLOW-WIRE FLAMMABILITY (GWI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
8. GLOW-WIRE IGNITION (GWI) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm, AND 3.0mm PER IEC 60695-2-13.

9. UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN

NATURAL	1586853-1
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. WHITAKER	18JUL2007	 TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. COLEY	18JUL2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY	18JUL2007	NAME	
		PRODUCT SPEC		CAP, 9 CIRCUIT, UNIVERSAL MATE-N-LOK(TM), SPECIAL	
		APPLICATION SPEC			
0 PLC ±		SIZE		CAGE CODE	
1 PLC ±		DRAWING NO		RESTRICTED TO	
2 PLC ±0.51 (0.020)		WEIGHT		A1 00779 ©=1586853	
3 PLC ±		CUSTOMER DRAWING		SCALE 4:1	
4 PLC ±		SHEET 1 OF 1		REV D	
ANGLES ±0° 30°					
FINISH					
MATERIAL NYLON UL 94V-2, NATURAL					