


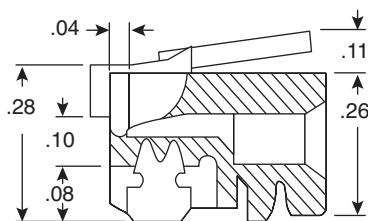


# Modular Phone Plugs

154-UL6234, 154-UL6236

**KOBI**CONN

Modular Phone Plugs



**DIMENSIONS IN**

SPECIFICATIONS	
<b>USOC Type:</b>	RJ11 (154-UL6234); RJ12 (154-UL6236)
<b>Western Electric Type:</b>	623 (4 or 6 Conductor for telephone to wall use)
<b>Color:</b>	Clear
<b>Positions-Contacts:</b>	6-4 (154-UL6234); 6-6 (154-UL6236)
<b>Housing Material:</b>	Polycarbonate (pc)
<b>Contact Blade:</b>	High strength copper alloy
<b>Contact:</b>	8% phosphor alloy
<b>Insulation Resistance:</b>	250VAC (max.) @ 2A 500MΩ
<b>Dielectric Withstand Voltage:</b>	500VAC for 1 minute
<b>Termination Resistance:</b>	35mΩ (max.)
<b>Tolerance:</b>	.006
<b>Cable-to-Plug Tensile Strength:</b>	20 lbs. (89N) min.
<b>Durability:</b>	200 mating cycles
<b>Operating Temperature:</b>	-40°C to +125°C

Date Last Revised: 10-15-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC-300630

154-UL6234, 154-UL6236