


I88 Series



KS

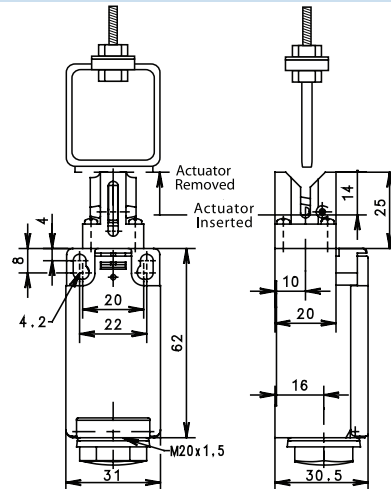


Switching Operation

1 NC / 1 NO Contacts

Slow Action


611.6819.140
I88-U1Z KS



Snap Action


-
-

W RAST

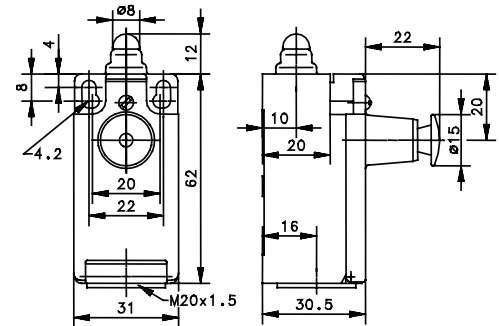

Slow Action

618.6103.005
I88-U1Z W RAST



Snap Action


-
-

2 NC Contacts

-
-

-
-

618.6803.155
I88-A2Z W RAST



-
-

2 NO Contacts

-
-

-
-

-
-

-
-

**1 NC / 1 NO Contacts
Overlapping**

-
-

-
-

-
-

-
-

Replacement actuator:

391.8401.031

Technical Information

	Slow Action	Snap Action	Slow Action	Snap Action
Maximum Switching Voltage	240V	240V	240V	240V
Max. Switching Amps (up to)*	10A	10A	10A	10A
B10d (up to)*	20 Million	20 Million	20 Million	20 Million
Mechanical Service Life (up to)*	3 x 10 ⁶	10 x 10 ⁶	10 x 10 ⁶	10 x 10 ⁶
Switching Frequency	≤ 100/min	≤ 100/min	≤ 100/min	≤ 100/min
Operating Temperature	-30 °C to +80 °C	-30 °C to +80 °C	-30 °C to +80 °C	-30 °C to +80 °C
Protection Rating	IP65	IP65	IP65	IP65
Utilization Category (up to)*	AC-15, Ue/Ue 240V 3A	AC-15, Ue/Ue 240V 3A	AC-15, Ue/Ue 240V 3A	AC-15, Ue/Ue 240V 3A
Rate Insulation Voltage	250VAC	250VAC	250VAC	250VAC

Approvals

* Depending on switching system - see technical information for details

