


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

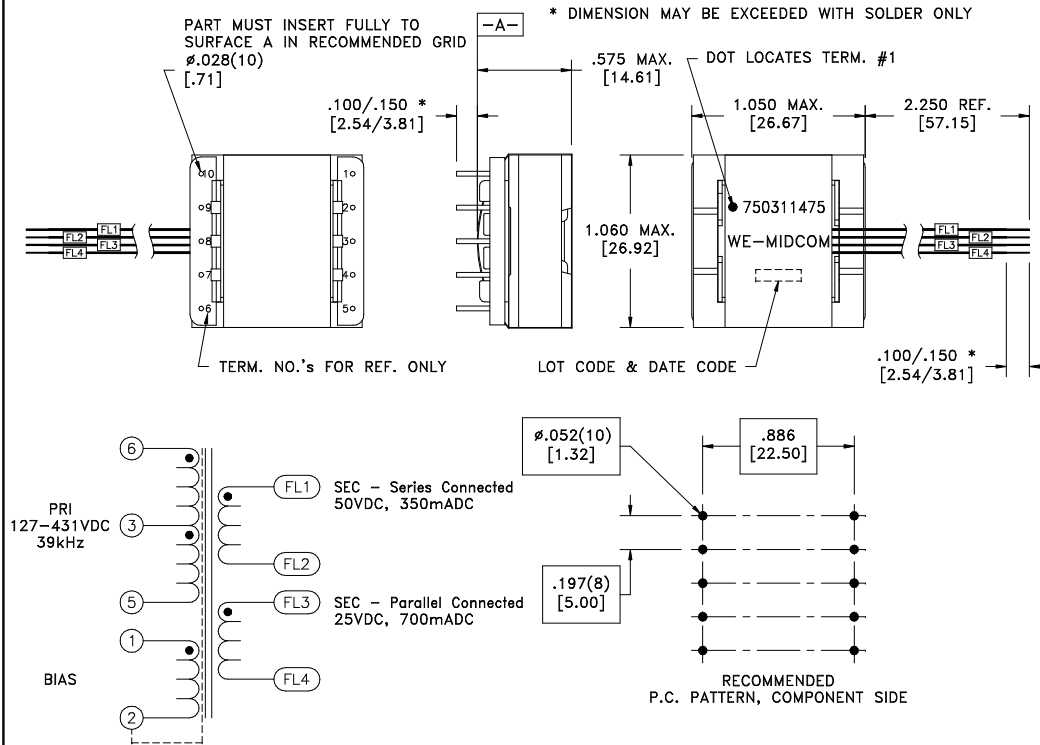

Designed for total output power of 18 Watts.

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	6-5 @20°C	0.845 ohms $\pm 20\%$
D.C. RESISTANCE	1-2 @20°C	0.235 ohms $\pm 20\%$
D.C. RESISTANCE	FL1-FL2 @20°C	0.090 ohms $\pm 20\%$
D.C. RESISTANCE	FL3-FL4 @20°C	0.090 ohms $\pm 20\%$
INDUCTANCE	6-5 10kHz, 100mVAC, Ls	1.72mH $\pm 10\%$
SATURATION CURRENT	20% rolloff from initial	1.05A
LEAKAGE INDUCTANCE	6-5 tie(1+2, FL1+FL2+FL3+FL4), 100kHz, 100mVAC, Ls	15uH max.
DIELECTRIC	6-FL1 tie(1+5, FL2+FL3), 4500VAC, 1 second	4500VAC, 1 minute
URNS RATIO	(6-5):(1-2)	4.18:1, $\pm 2\%$
URNS RATIO	(6-5):(FL1-FL2)	7.67:1, $\pm 2\%$
URNS RATIO	(6-5):(FL3-FL4)	7.67:1, $\pm 2\%$

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC61558-2-17:
- Reinforced insulation for a primary circuit at a working voltage of 400VDC.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: Tray PKG-0029 www.midcom-inc.com	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [.13] Fractions: $\pm 1/64$ Footprint: $\pm .001$ [.03]	DRAWING TITLE TRANSFORMER	PART NO. 750311475
6A	3/10	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750311475	SPECIFICATION SHEET 1 OF 1

