


PAGE 1/1	ISSUE	01-03-18A	SERIES	HF C/A	PART NUMBER	R296703035
----------	-------	-----------	--------	--------	-------------	------------

CUSTOMER : **GALTRONICS** SPECIFICATION : **NA** ISSUE : **NA** DATE : **NA**

All dimensions are in mm

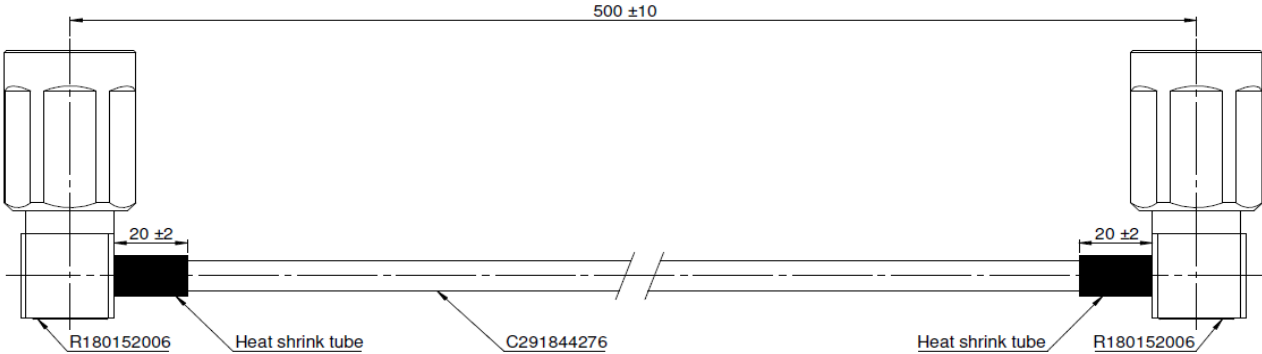

CONNECTORS DESIGNATION	Connector 1: R180152006 NEX10 RIGHT ANGLE SCREW PLUG SOLDER TYPE FOR CABLE.085 Torque wrench : 150 N.cm	Connector 2: R180152006 NEX10 RIGHT ANGLE SCREW PLUG SOLDER TYPE FOR CABLE.085 Torque wrench : 150 N.cm
------------------------	---	---

CABLE DESIGNATION	C291844276 - Hand formable cable .085 jacketed
PROTECTIVE JACKET	Blue FEP
OUTER DIAMETER	2.50 mm nominal
MARKING	NA

ELECTRICAL CHARACTERISTICS

Characteristic impedance	50 Ohms	Insulation Resistance:	5000 MOhms min
Frequency band :	DC - 6 GHz	Voltage Rating:	500 Veff max
Max insertion loss :	NA dB	Withstanding voltage:	1000 Veff min
Max VSWR :	NA		

MECHANICAL CHARACTERISTICS

Bending radius :	6 mm	<div style="border: 1px solid black; padding: 5px; text-align: center;"> CUSTOMER'S APPROVAL </div> <div style="border: 1px solid black; padding: 5px;"> Service or Company's stamp Name Date </div>
Life (Connectors) :	100 Cycles	

ENVIRONMENTAL CHARACTERISTICS

Temperature range :	-45 to +85 °C
---------------------	---------------

Remark : **Cable Assembly is RoHS compliant.**