

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECR-17-015449	26OCT2017	BDA	KR

D

C

B


A

D


C

B

A

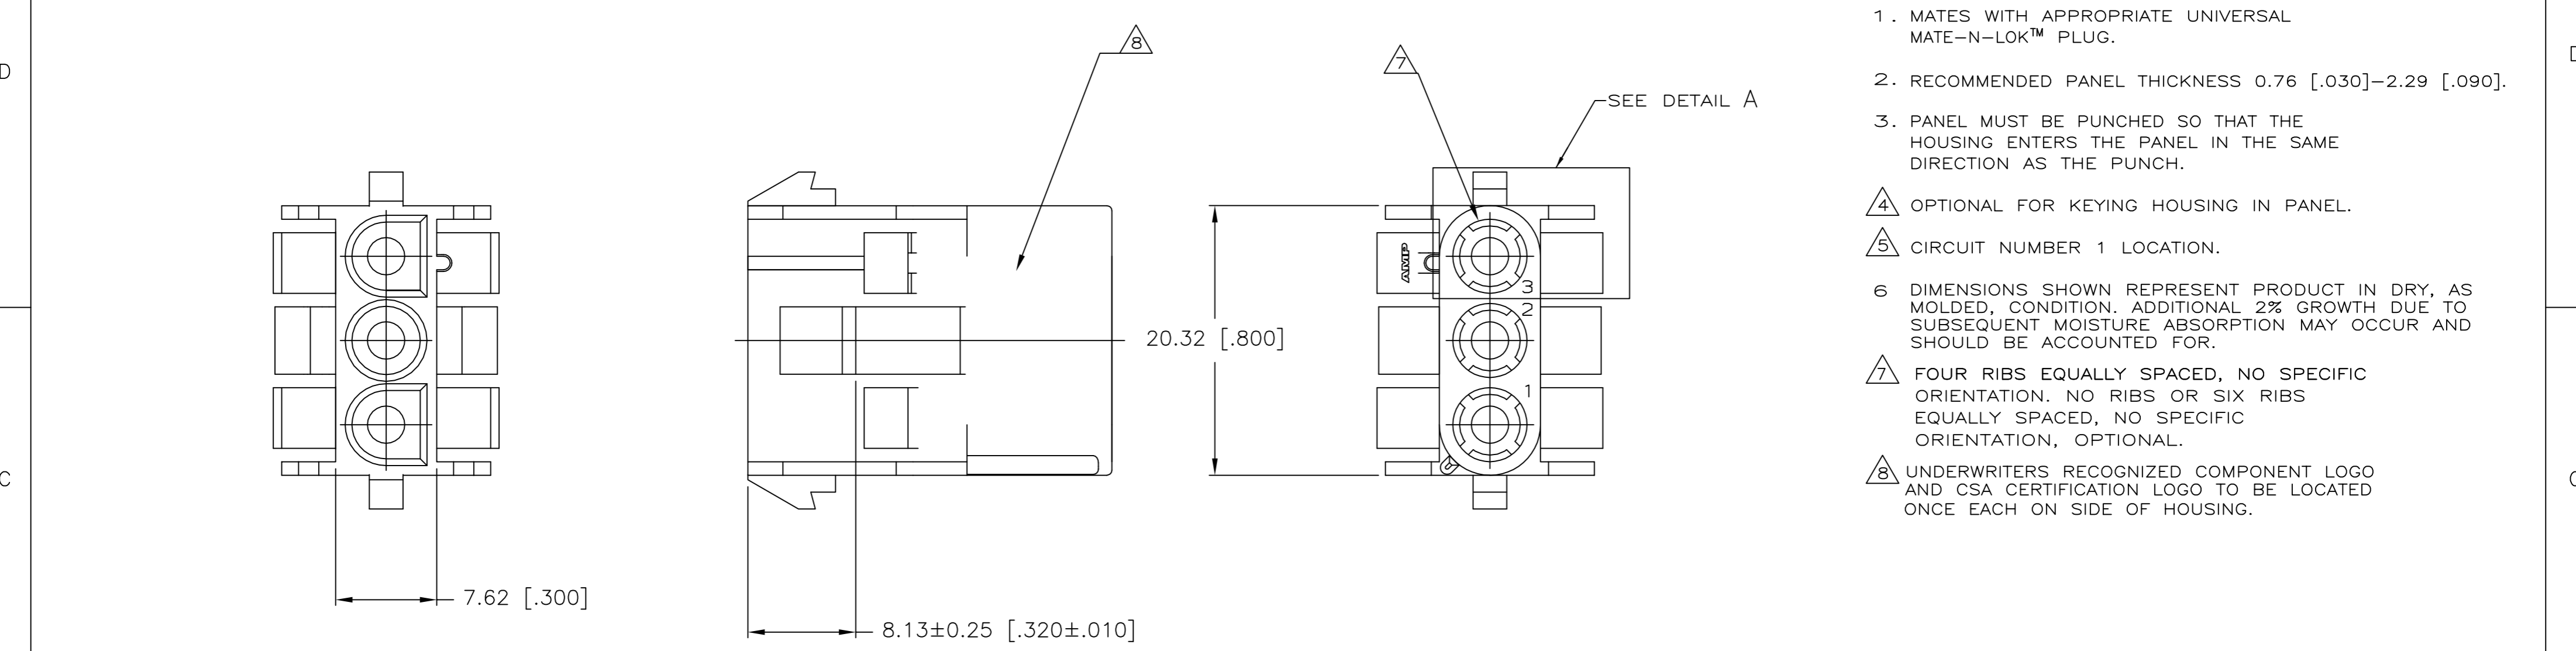

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- RECOMMENDED PANEL THICKNESS 0.76 [.030]–2.29 [.090].
- PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- CIRCUIT NUMBER 1 LOCATION.
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

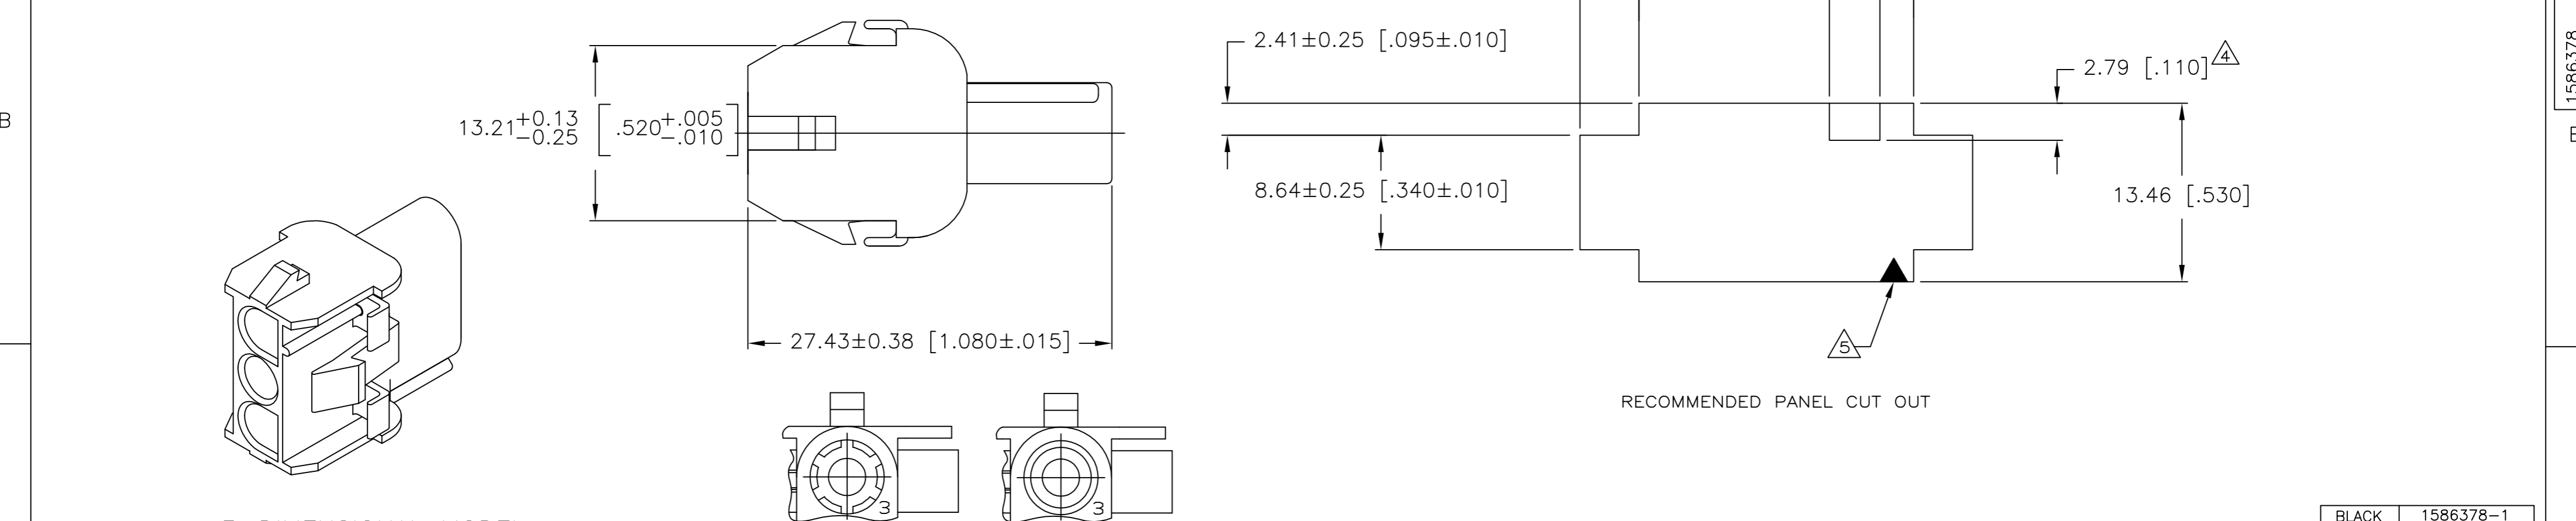

3-DIMENSIONAL MODEL NTS

DETAIL A
OPTIONAL CONSTRUCTIONS

BLACK	1586378-1
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 05-MAR-2004	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 05-MAR-2004			
		APVD S. RIDGILL 05-MAR-2004	NAME		
		PRODUCT SPEC	CAP, 3 CIRCUIT, UV RESISTANT UNIVERSAL MATE-N-LOK™		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
0 PLC ±		WEIGHT	A2	00779	C=1586378
1 PLC ±		CUSTOMER DRAWING	SCALE	SHEET	REV
2 PLC ± 0.13 [.005]			4:1	1 of 1	A
3 PLC ±					
4 PLC ±					
ANGLES ±					
FINISH					
MATERIAL NYLON, UL 94V-2					