


# 976nm Laser Module Stabilized with Narrow-Bandwidth Grating

## LC95A76ULR


The Bookham LC95A76ULR single-mode laser module with narrow-bandwidth grating has been designed to provide the stringent noise and bandwidth performance required for second harmonic generation and frequency mixing applications. The laser with narrow-band grating allows high output powers that are very stable with both time and temperature while providing enhanced wavelength and power stability performance. The narrow-bandwidth grating is located in the polarization maintaining fiber pigtail.

**Features:**

- >250mW output power
- Polarization maintaining single-mode fiber pigtail
- Internal thermoelectric heatpump and monitor photodiode
- Hermetically sealed 14-pin butterfly package
- Spectral width smaller than 100pm
- RoHS compliant 

**Applications:**

- Blue light second-harmonic generation
- Frequency mixing

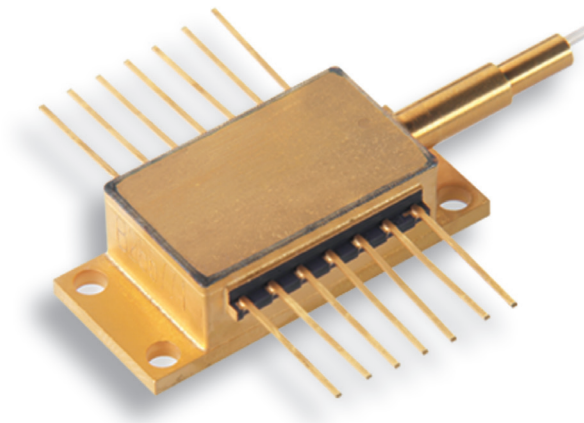

## Characteristics

Conditions unless otherwise stated: Case temperature -20 to +75°C  
 Submount temperature 25°C  
 Monitor diode bias -5 V  
 CW operation

Parameter	Min	Typ	Max	Unit
Threshold Current ( $I_{th}$ )		35	50	mA
Operating Drive Current ( $I_f$ )			700	mA
Operating Power ( $P_{op}$ )	250	300		mW
Forward Voltage ( $V_f$ )		1.9	2.5	V
Peak Wavelength ( $\lambda_p$ )	975.5	976.0	976.5	nm
Spectral Width (FWHM)		35	100	pm
Temperature Dependence of Peak Wavelength		7	20	pm/K
Monitor Detector Responsivity	0.3			$\mu\text{A/mW}$
Monitor Dark Current			100	nA
Thermistor Resistance (at 25°C)	9.5	10	10.5	k $\Omega$
Intended Laser Submount Operating Temperature	24	25	26	°C
Power Stability (RMS, 100-250mW, 25°C, 20Hz-2MHz)			0.25	%
Heatpump Current ( $\Delta T = 50^\circ\text{C}$ , $I_f = 700\text{mA}$ )			1.85	A
Heatpump Voltage ( $\Delta T = 50^\circ\text{C}$ , $I_f = 700\text{mA}$ )			3	V
Polarization Extinction Ratio	13	17		dB

## Absolute Maximum Ratings


Parameter	Min	Max	Unit
Operating Temperature	-20	75	°C
Storage Temperature	-40	80	°C
Laser Forward Current		800	mA
Laser Reverse Voltage		2	V
Heatpump Current		2.5	A
Heatpump Voltage		3	V
Lead Soldering Temperature (10s max)		260	°C
Fiber Bend Radius	30		mm

## Fiber Specification

Nufern PM980-HP or equivalent 250µm primary coated fiber

## Connections

Pin #	Description	Pin #	Description
1	Peltier cooler (+)	8	Not connected
2	Thermistor	9	Not connected
3	Monitor anode (-)	10	Laser anode (+)
4	Monitor cathode (+)	11	Laser cathode (-)
5	Thermistor	12	Not connected
6	Not connected	13	Case ground
7	Not connected	14	Peltier cooler (-)

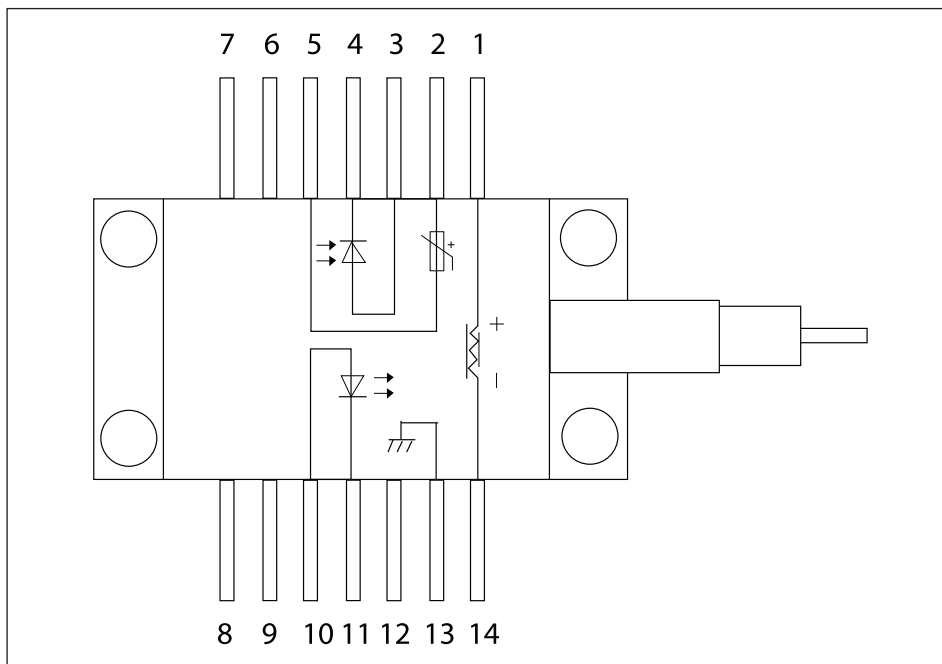

## RoHS Compliance



Bookham is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

### Ordering Information:

LC95A76ULR

976nm Laser Module Stabilized with Narrow Bandwidth Grating

## Contact Information

### Bookham (Switzerland) AG

Binzstrasse 17  
8045 Zurich  
Switzerland

- Tel: +41 44 455 8787
- Fax: +41 44 455 8586

[www.bookham.com](http://www.bookham.com)  
[highpower@bookham.com](mailto:highpower@bookham.com)

### EMEA Sales Contact

Gunnar Stolze

- Tel: +41 79 635 3777

### North America Sales Contact

Michael Cutler

- Tel: +1 678 763 0777

### ASIA Sales Contact

Patrick Lee

- Tel: +852 9197 7014

### Japan Sales Contact

Japan Laser Corporation

- Tel: +813 5285 0861

### Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Bookham before they become applicable to any particular order or contract. In accordance with the Bookham policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Bookham or others. Further details are available from any Bookham sales representative.



REFERENCE IEC 60825-Edison 1.2



This product complies with 21CFR 1040.10



FM 68159

