



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A5	ECR-18-009174	13JUN18	L.P	T.D


SUGGESTED MATING TAB

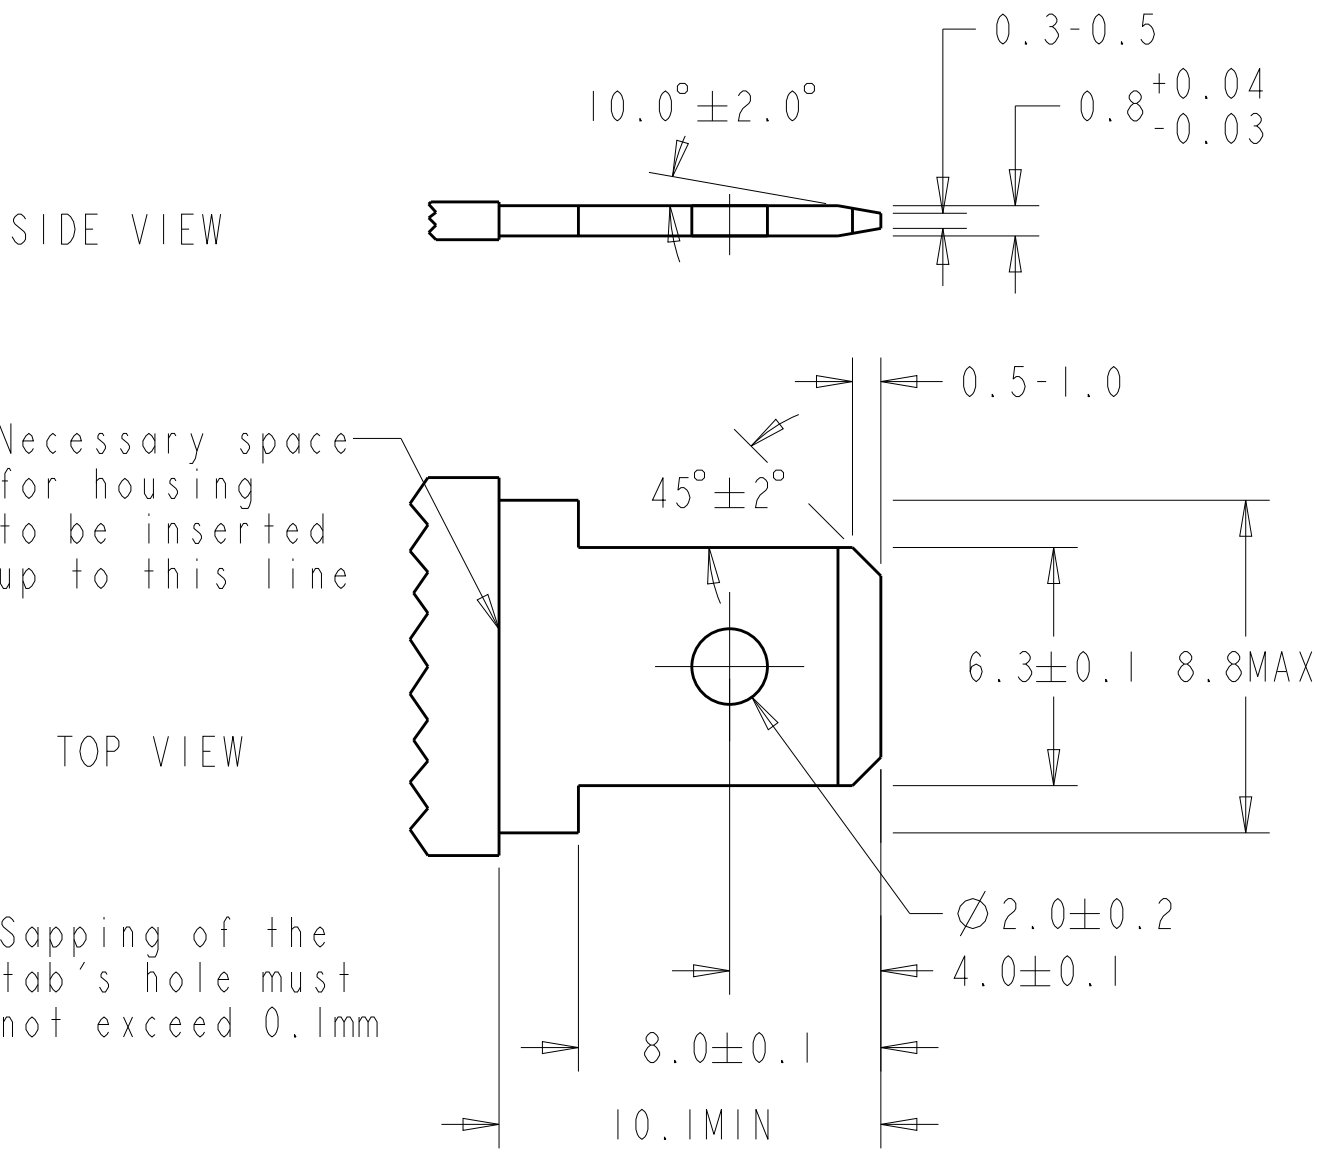

TYPE A (When using tab shoulder for butting)


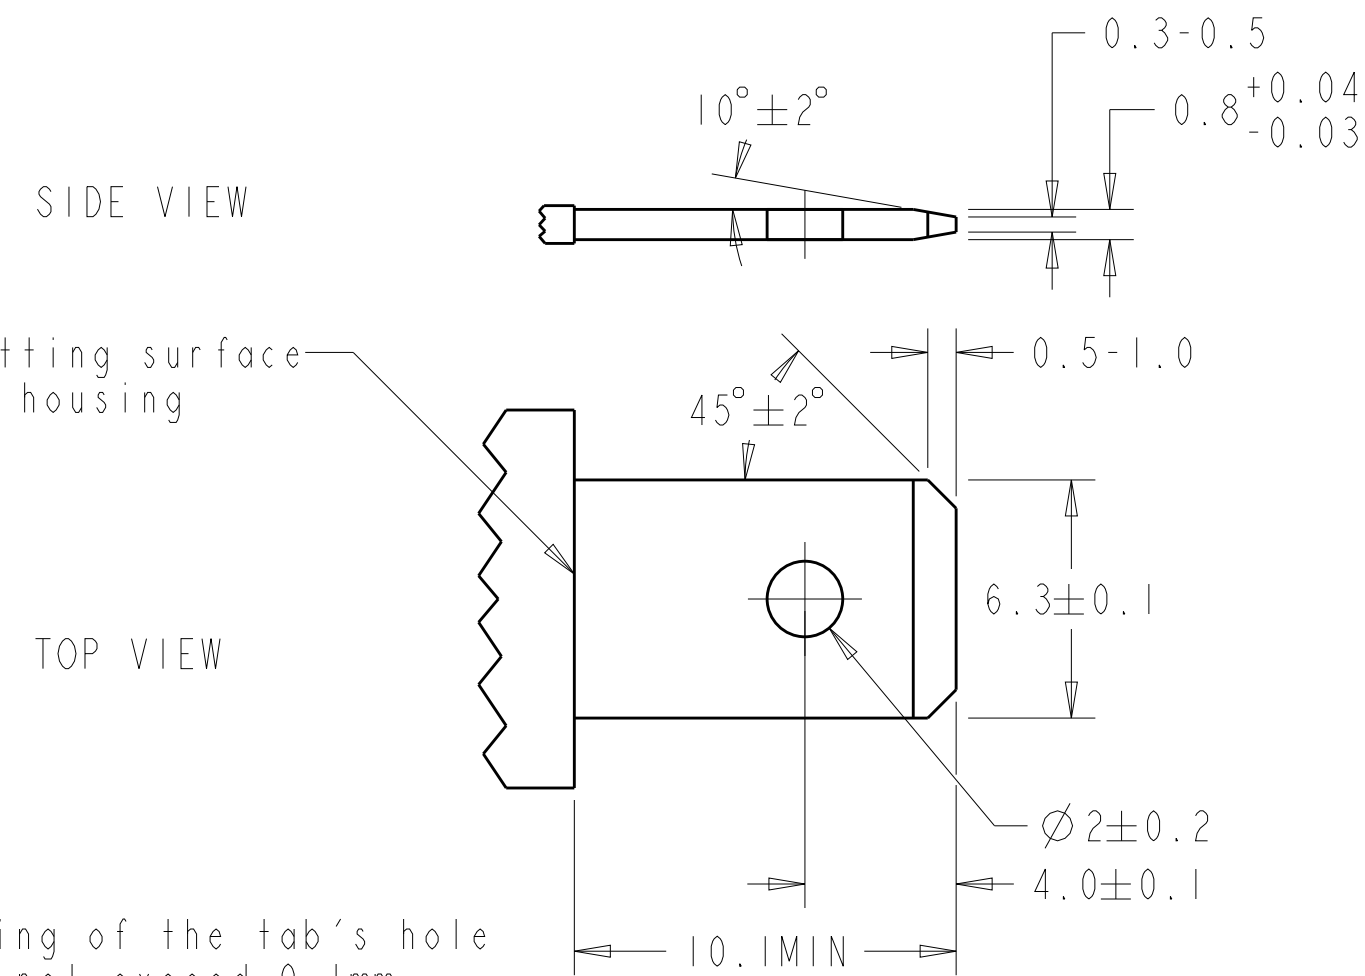


TYPE B(When using resin, etc. for butting)

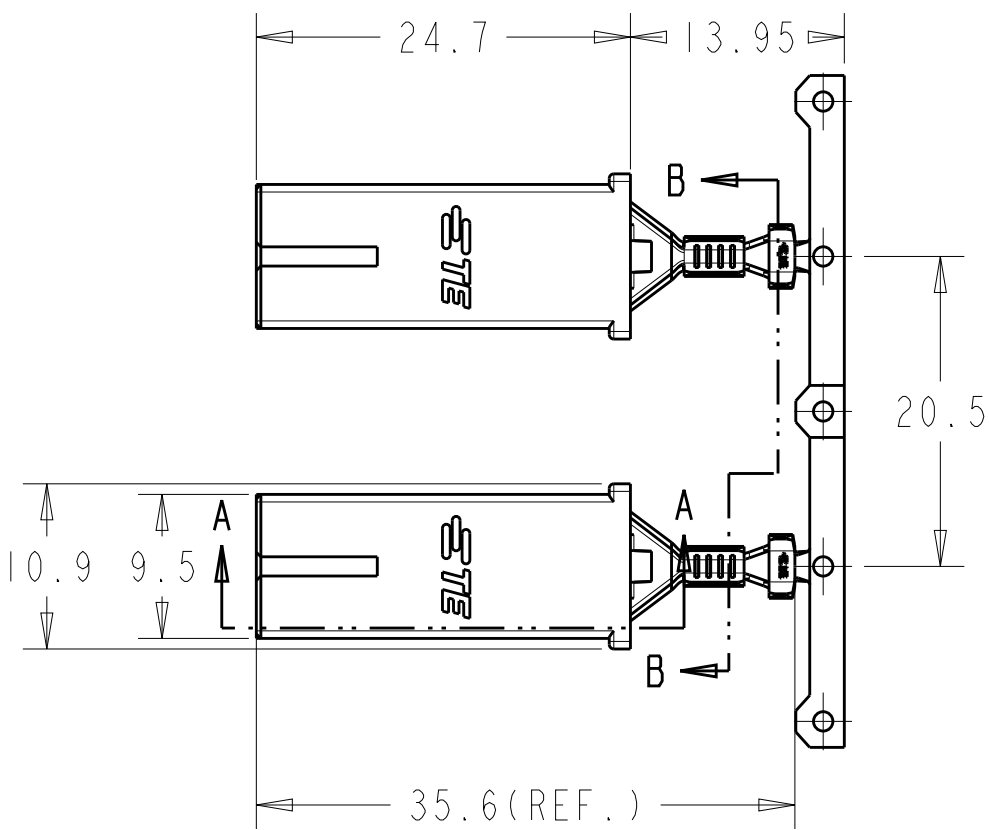

NOTE:

- 1.HOUSING MATERIAL,NYLON 6/66,GLASS-FIBRE. UL94V-0.
- 2.GWT 750°C VERSION,ACCORDING TO IEC 60335-1.
- 3.CONTACT MATERIAL,TIN PLATED BRASS.

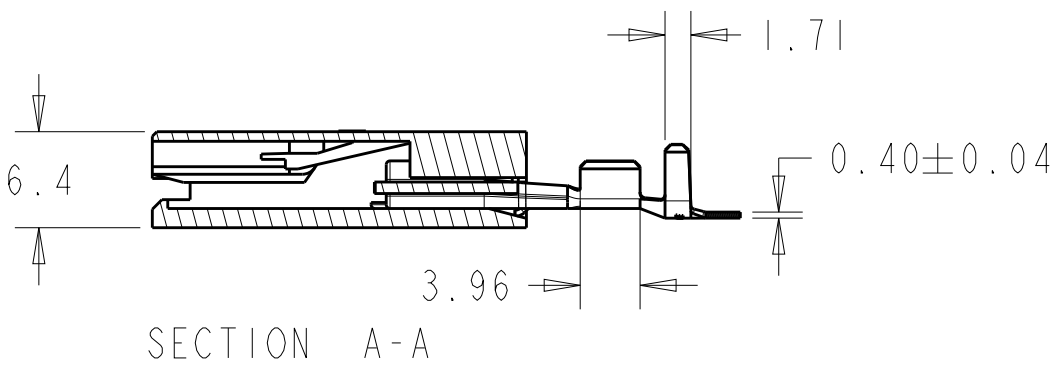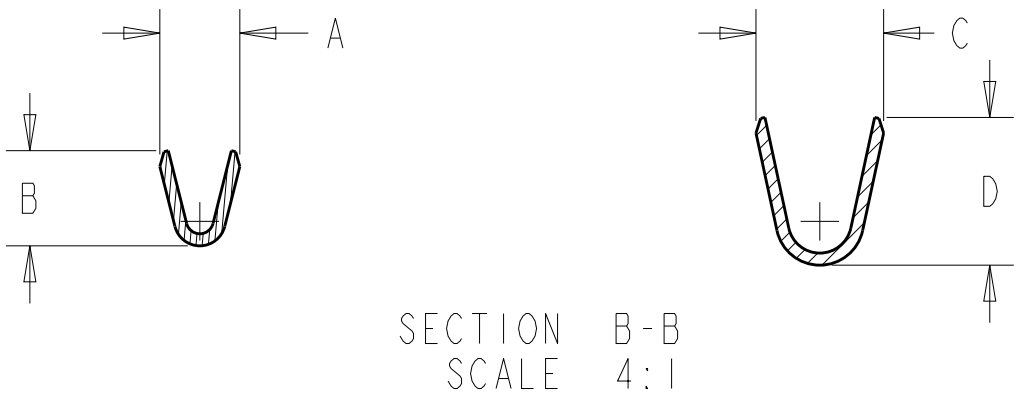

5.8REF.	6.2	4.5REF.	4.5	3.40-5.08	14-12	2299282-3
4.9REF.	5.3	3.9REF.	3.5	3.0-4.0	18-14	2299282-2
4.9REF.	4.2	3.1REF.	2.6	2.2-3.0	22-18	2299282-1
DIM D	DIM C	DIM B	DIM A	INSULATION(mm)	WIRE SIZE(AWG)	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN 14NOV2016 CHK 14NOV2016 APVD 14NOV2016 PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		TE Connectivity			
0 PLC ±		1 PLC ±0.3		NAME			
2 PLC ±0.25		3 PLC ±		POD-LOK 250 STR.ASSY.			
4 PLC ±		ANGLES ±		SIZE			
FINISH		-		CAGE CODE			
-		-		DRAWING NO			
-		-		RESTRICTED TO			
-		-		A2			
-		-		C=2299282			
-		-		SCALE 5:1			
-		-		SHEET 1 OF 1			
-		-		REV A5			